


Good. Safe. Yellow.

Catalogue 2021
Valid from February 2021



Klingspor
Abrasive Technology

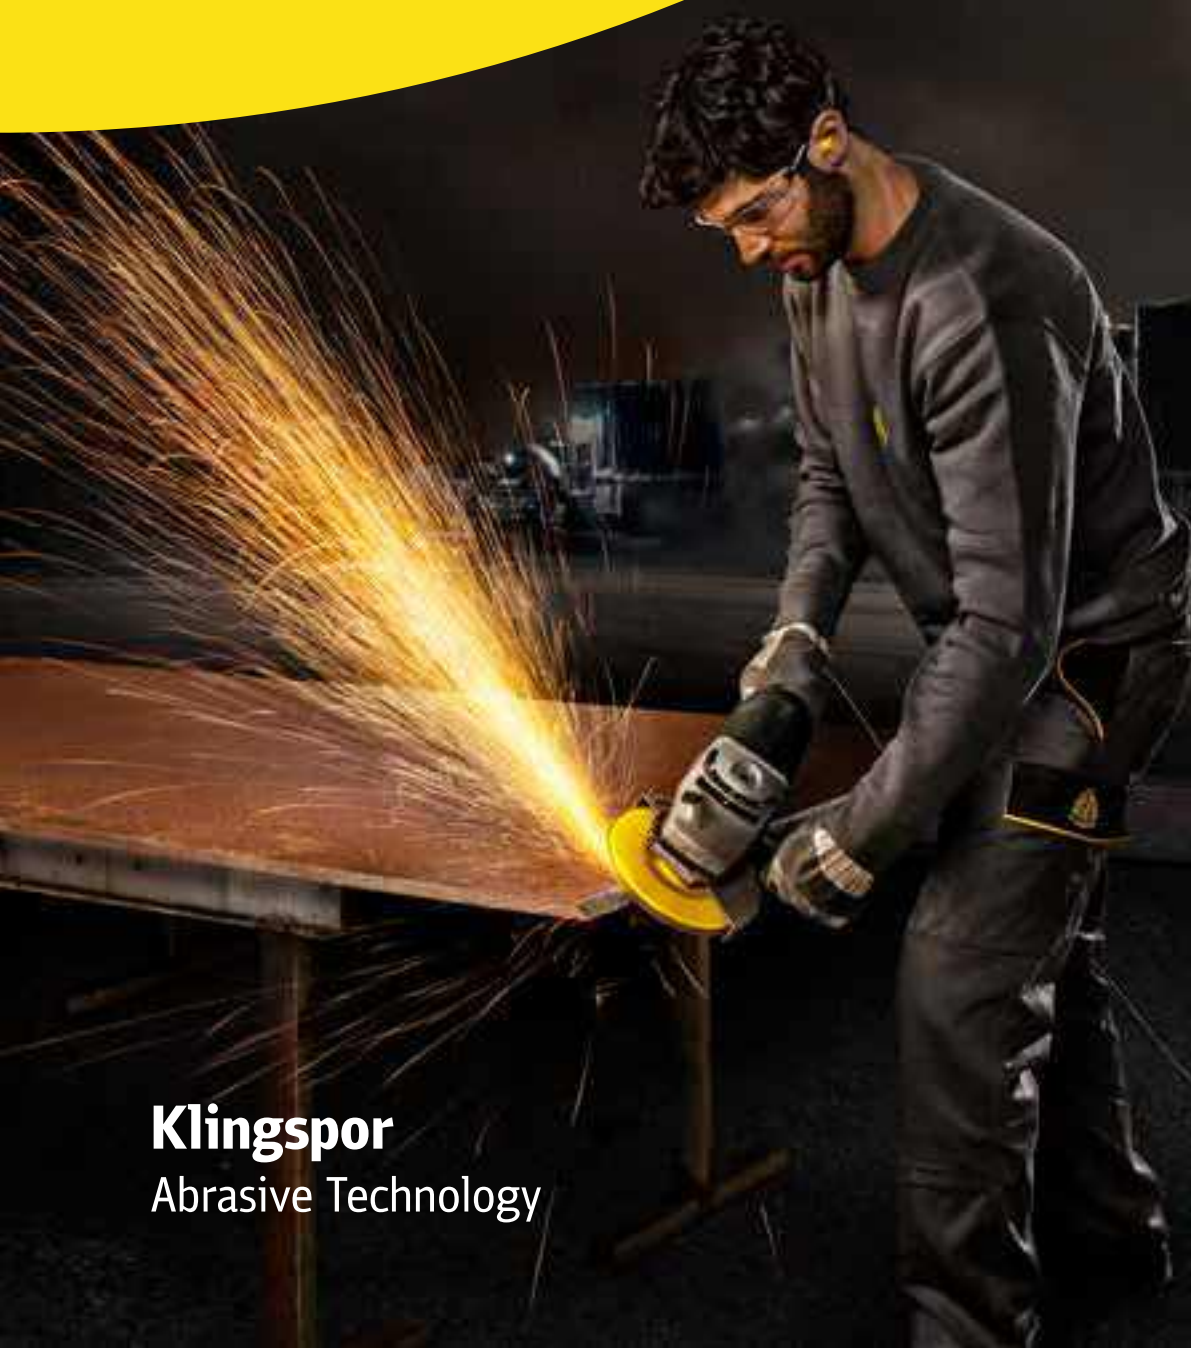

Klingspor products are marked with the oSa label



What does oSa mean?

In a host of applications, grinding and cutting require very high peripheral speeds from the rotating abrasive product. These products must therefore be particularly safe so as to stand up to the extreme mechanical and thermal stress.

Regrettably there are no globally binding safety requirements for abrasive products.

This is why responsible manufacturers of abrasive products from a number of European countries set up the Organisation for the Safety of Abrasives (oSa) in 2000 and thus setting a clear signal against inferior and dangerous products.

The user recognises these quality grade products from the oSa trade name. They signify to the manufacturer and trader a reduced liability risk, a market and competitive benefit and an image gain.

As a part of their in-house quality management system, the manufacturers see to it that the exact provisions are kept to and that only safe, high quality abrasive products are produced and marketed. The fact that the oSa – Organisation for the Safety of Abrasives - issues the worldwide protected oSa trademark to members is confirmation of this internal commitment.

The oSa label does not mean that the Organisation for the Safety of Abrasives or its institutions assume any liability of the designated products.

Contents

General information	
Contents	3

Coated abrasives	
Product summary	4-13
Applications guide	14-17

Rolls	
Applications guide	18-21
Rolls	22-37

Belts	
Applications guide	38-45
Short and long belts	46-73
Sleeves	74-77

Wide belts	
Applications guide	78-81
Wide belts	82-95

Fibre discs	
Applications guide	96-99
Fibre discs	100-109

Strips/sheets/discs	
Strips/sheets	
Applications guide	110-116
Strips/sheets	117-137
Discs	
Applications guide	138-139
Discs	140-161

Quick Change Discs	
Applications guide	162-165
Quick Change Discs	166-173

Abrasive mops	
Applications guide	174-179
Abrasive mop disc, drums	180-187
Small abrasive mops	
Applications guide	188-189
Small abrasive and finishing mops	190-195

Non-woven products	
Applications guide	196-203
Non-woven rolls	204-205
Non-woven hand pad	205-206
Non-woven belts	206-207
Non-woven discs	208-210 221-223
Non-woven quick change discs	211-215
Non-woven mop wheels and drums	216-219
Non-woven abrasive mop discs	220
Unitized wheels, clean and strip discs, Power Wheel	221-223

Abrasive mop discs	
Applications guide	224-229
Abrasive mop discs	230-241

Cutting-off wheels	
Applications guide	242-251
Cutting-off wheels 0,8-1,2 mm	252-259
Cutting-off wheels 1,6-1,9 mm	260-263
Cutting-off wheels 2,0-3,2 mm	264-271
Large cutting-off wheels	272-281

Grinding discs	
Applications guide	282-283
Grinding discs	284-288
Cup grinding wheels	289-291

Diamond tools	
Applications guide	292-297
Diamond cutting blades	298-308 313-326
Diamond cup grinding wheels	309-312
Diamond drill bits & other diamond tools	
Diamond drill bits	327-331
Other diamond tools	331-335

Flexible abrasives	
Applications guide	336-338
Flexible abrasives	339-341

Carbide burrs	
Applications guide	342-345
Carbide burrs	346-357

Wire brushes	
Applications guide	358-365
Wire brushes	366-373

D.I.Y. range	
Applications guide	374-375
D.I.Y. range	376-385

Service	
Point of Sale	386-387
Safety recommendations	388-389



All products with catalogue numbers are held in stock in Germany and can be delivered within a short time.

The product groups at a glance

With this catalogue, Klingspor makes it quick and easy to select the products you need from our huge range of top quality abrasives. The clearly arranged categorisation into thirteen product groups will help you quickly find what you are looking for.

State-of-the-art manufacturing techniques ensure that our coated abrasives fulfill the most demanding standards of surface finish, long life and stock removal.



Belts

Klingspor abrasive belts are available in various sizes and grades to meet all grinding, sanding and finishing requirements for a wide range of materials and applications.



Fibre discs

Klingspor fibre discs are exceptionally suited for rough grinding work, rust removal, deburring and working on welded seams.



Rolls

Klingspor rolls for hand sanding or use with handheld machines are available in a number of special grades designed for a wide variety of materials – from wood, to metal, to paint.



Abrasive strips, sheets and discs

Klingspor strips, sheets and discs are available in various qualities and designs.



Abrasive mop wheels

The abrasive mop wheel is particularly suitable for finishing where flexibility is a must. It matches the contours of any workpiece perfectly. Klingspor has the right abrasive mop wheel for virtually every application and for nearly all types of material.

General information

Product overview



Non-woven products

Klingspor offers a large variety of non-woven products. From rolled goods, belts and wheels to abrasive angle grinder mop discs and abrasive spindle mop varieties.



Wire brushes

Klingspor wire brushes for use on the most diverse cleaning and surface preparation applications on steel and stainless steel.



Abrasive mop discs

The performance of the Klingspor abrasive mop disc, with its fan-shaped radial arrangement of the cloth grinding flaps, far exceeds that of other abrasive products.



Kronenflex grinding discs and cutting-off wheels

Continuous innovation and the development of specialised products for all application areas enables Klingspor to offer a range of grinding discs and cutting-off wheels to satisfy every need.



D.I.Y. range

The complete range available with relevant grit ranges and assortments in customised packing units. Uniform packing design with precise product identification for quick access.



Flexible abrasives

Flexible abrasives which were developed by Klingspor for precision finishing and polishing work on all kinds of surfaces.



Carbide burs

Klingspor carbide burs are manufactured according to the highest quality standards and with utmost precision. The different cuts are adapted to meet the specific requirements of various materials and applications.



Diamond tools


Klingspor's comprehensive range of diamond tools makes it easy for any user to work faster and with greater precision and endurance. As they are made of carefully tested premium grade materials, the products included in each product line offer a wide range of possible applications and meet the highest safety standards.

General information

Product overview



Hand sanding



Hand block



Handheld brush



Orbital sander




Random orbital sander




Delta sander




Portable belt sander




Hand tool belt grinder




Back stand grinding machine




Centreless finishing machine




Through-feed grinding machine



Edge sanding machine




Contour finishing machine



Pad / stroke sanding machine




Wide belt finishing machine




Drilling machine




Cordless screwdriver



Die grinder




Satin finishing machine




Floor standing grinder

General information


Product overview




Angle grinder




Variable speed angle grinder



Angle grinder with brush




Angle grinder with cup grinding wheel




Petrol powered cutter



Stationary cutting machine $\leq 5\text{kW}$



Chop saw



Drilling machine



Joint cutter




Lifting beam with mottling points




Right angle die grinder



Flexible shaft grinder



Petrol powered cutter with clamping device



Fillet weld grinder



Table saw




Joint router



Stationary cutting machine $> 5\text{kW}$



Parquet sander



Drill stand

Product guide

Coated abrasives

	Type	Properties	Backing	Grain type
Abrasive paper	PS 8 A	Waterproof	A-paper	SiC
	PS 8 C	Waterproof	C-paper	SiC
	PS 11 A	Waterproof	A-paper	SiC
	PS 11 C	Waterproof	C-paper	SiC
	PS 20 F		F-paper	Aluminium oxide
	PS 21 F		F-paper	Zirconia alumina
	PS 22 F ACT	ANTISTATIC	F-paper	Aluminium oxide
	PS 22 N		E-paper	Aluminium oxide
	PS 24 F ACT	ANTISTATIC	F-paper	SiC
	PS 27 DW	Specially coated, ANTISTATIC	D-paper	SiC
	PS 28 F	ANTISTATIC	F-paper	Aluminium oxide
	PS 29 F ACT	ANTISTATIC	F-paper	Aluminium oxide
	PS 30 D		D-paper	Aluminium oxide
	PL 31 B		B-paper	Aluminium oxide
	PS 33 B		B-paper	Aluminium oxide
	PS 33 C		C-paper	Aluminium oxide
	PS 38 G ACT	ANTISTATIC	G-paper	SiC
	PS 524 E	ANTISTATIC	E-paper	SiC
	PS 529 F	KULEX	F-paper	SiC agglomerate
	PS 61 F		F-paper	Ceramic aluminium oxide
	PS 729 F		F-paper	Aluminium oxide-agglomerate
	FP 73 W	Specially coated	Film	Aluminium oxide
	PS 73 BW	Specially coated	B-paper	Aluminium oxide
	PS 73 BWF	Specially coated	B-paper + foam core	Aluminium oxide
	PS 73 CWF	Specially coated	C-paper + foam core	Aluminium oxide
Self-fastening	PS 19 EK		E-paper	SiC
	PS 21 FK		F-paper	Zirconia alumina
	PS 22 K		E-paper	Aluminium oxide
	PS 33 BK		B-paper	Aluminium oxide
	PS 33 CK		C-paper	Aluminium oxide
	CS 411 XK		X-cotton	Zirconia alumina
	PS 61 FK		F-paper	Ceramic aluminium oxide
	FP 73 WK	Specially coated	Film	Aluminium oxide
	PS 73 BWK	Specially coated	B-paper	Aluminium oxide
	PS 73 CWK	Specially coated	C-paper	Aluminium oxide
	PS 77 CK T-ACT	T-ACT coating	C-paper	Aluminium oxide
	FP 77 K T-ACT	T-ACT coating	Film	Aluminium oxide

Cloth

JF	Cotton, light, highly flexible
GX	Blended cloth, light, flexible
J	Cotton, light
XF	Cotton, heavy, flexible
X	Cotton, heavy
Y	Polyester, heavy, highly firm
Z	Polyester, heavy, highly firm, can be divided into segments

Paper

A	approx. 95 g/m ²
B	approx. 105 g/m ²
C	approx. 110 g/m ²
D	approx. 130 g/m ²
E	approx. 250 g/m ²
F	approx. 300 g/m ²
G	approx. 400 g/m ²

Product guide

Coated abrasives



					Page									
Type	Coating	Bonding agent	Waterproof	Available grits	Rolls	File belts	Belts for handheld grinders	Short and long belts	Spirabands	Wide belts	Fibre discs	Strips	Sheets	Discs
PS 8 A	●	K	✓	180–2500									117	
PS 8 C	●	K	✓	60–150									117	
PS 11 A	●	K	✓	220–2000									119	
PS 11 C	●	K	✓	60–400, 600, 1000									118	140
PS 20 F	●	K		60–240, 320, 400				52		82				
PS 21 F	●	K		40, 60–320, 400				52		82				
PS 22 F ACT	●	K		40, 60–400	22			52		83		123		
PS 22 N	○	K		24, 40, 60–240, 320, 400	23									
PS 24 F ACT	●	K		80, 120–800				53		84				
PS 27 DW	○	K		180–320, 400, 600				53		84				
PS 28 F	○	K		40–320, 400–1000				54		85				
PS 29 F ACT	○	K		40–320, 400	27			54		85				
PS 30 D	○	K		40, 60–240, 320	23							123	120	
PL 31 B	○	L		40–320, 400	24							124	120	
PS 33 B	○	K		150–320, 400–600	26								122	
PS 33 C	○	K		40, 60–120	25								121	
PS 38 G ACT	●	K		80–180						86				
PS 524 E	●	K		40, 60–800				53		83				
PS 529 F		K		120, 180, 240, 320, 400				56		87				
PS 61 F	●	K		60, 80, 120–320, 400				55		86				
PS 729 F		K		180, 240, 320, 400				56		87				
FP 73 W	○	K		80–180, 240, 320, 400, 600–1500				56				128		
PS 73 BW	○	K		150–1500									122	
PS 73 BWF	○	K		180, 240, 320, 400, 600	28									
PS 73 CWF	○	K		120	27									
PS 19 EK	●	K		36, 40, 60–120, 220, 320, 400, 600, 800, 1200								125		141
PS 21 FK	●	K		40, 60–180, 240, 320, 400										141
PS 22 K	○	K		24, 40, 60–240, 320, 400								125		142
PS 33 BK	○	K		150–320, 400–600								127		148
PS 33 CK	○	K		40, 60–120								126		146
CS 411 XK	●	K		40, 60, 80										160
PS 61 FK	●	K		40, 60, 80, 120–180, 240, 280										149
FP 73 WK	○	K		80–180, 240, 320, 400, 600–1500										150
PS 73 BWK	○	K		150–1500										152
PS 73 CWK	○	K		40, 60–120										151
PS 77 CK T-ACT	○	K		60–220								129		154
FP 77 K T-ACT	○	K		240–2000								128		153

● = close ○ = semi-open ○ = open

Bonding agent

K Resin
L Glue

Product guide

Coated abrasives

	Type	Properties	Backing	Grain type
Abrasive cloth	CS 308 Y		Y-polyester	Aluminium oxide
	LS 309 J		J-cotton	Aluminium oxide
	LS 309 JF		JF-cotton	Aluminium oxide
	LS 309 X		X-cotton	Aluminium oxide
	LS 309 XH		X-cotton	Aluminium oxide
	CS 310 X		X-cotton	Aluminium oxide
	CS 310 XF		XF-cotton	Aluminium oxide
	CS 311 Y ACT	ANTISTATIC	Y-polyester	Aluminium oxide
	LS 312 JF		JF-cotton	Aluminium oxide
	LS 313 JF	Multibond	JF-cotton	Aluminium oxide
	LS 314 JF		JF-cotton	Aluminium oxide
	LS 318 JF ACT	ANTISTATIC	JF-cotton, SUPERFLEX	Aluminium oxide
	CS 320 Y	Waterproof	Y-polyester	SiC
	CS 321 X	Waterproof	X-cotton	SiC
	CS 322 X	Waterproof	X-cotton	Cork
	CS 325 Y	KULEX, waterproof	Y-polyester	SiC agglomerate
	CS 326 Y	KULEX, waterproof	Y-polyester	Aluminium oxide-agglomerate
	CS 329 Y	KULEX	Y-polyester	Aluminium oxide-agglomerate
	CS 330 X	Waterproof	X-cotton	SiC / Cork
	CS 333 JF		JF-cloth	SiC
	CS 333 X		X-cotton	SiC
	CS 333 XF		XF-cotton	SiC
	CS 336 Y	ANTISTATIC	Y-polyester	SiC
	CS 341 X	Waterproof	X-cotton	Aluminium oxide
	KL 361 JF		JF-cotton	Aluminium oxide
	KL 371 X		X-cotton	Aluminium oxide
	KL 385 JF		JF-cotton	Aluminium oxide
	CS 409 Y	Multibond	Y-polyester	Zirconia alumina
	CS 410 X	Multibond	X-cotton	Aluminium oxide
	CS 411 X		X-cotton	Zirconia alumina
	CS 411 Y	Waterproof	Y-polyester	Zirconia alumina
	CS 412 Y	Waterproof	Y-polyester	Aluminium oxide
	CS 416 Y	Waterproof	Y-polyester	Zirconia alumina
	CS 420 Y	Waterproof, NOPPEX	Y-polyester	Aluminium oxide
	CS 451 X	Multibond	X-cotton	Zirconia alumina
	GX 533 JF		JF-blended cloth	SiC
	CS 538 Z ACT	ANTISTATIC	Z-polyester	SiC
	CS 631 XF	Multibond	XF-cotton	Ceramic aluminium oxide
	CS 710 XF		XF-cotton	Aluminium oxide
	GX 712 JF		JF-blended cloth	Aluminium oxide
	CS 811 Y ACT	Waterproof	Y-polyester	Zirconia alumina
	CS 910 Y ACT	Multibond	Y-polyester	Ceramic aluminium oxide
	CS 912 Y ACT	Waterproof	Y-polyester	Ceramic aluminium oxide
	CS 931 JF	Multibond	JF-cotton	Ceramic aluminium oxide
	GX 931 JF	Multibond	JF-blended cloth	Ceramic aluminium oxide

Cloth

JF	Cotton, light, highly flexible
GX	Blended cloth, light, flexible
J	Cotton, light
XF	Cotton, heavy, flexible
X	Cotton, heavy
Y	Polyester, heavy, highly firm
Z	Polyester, heavy, highly firm, can be divided into segments

Paper

A	approx. 95 g/m ²
B	approx. 105 g/m ²
C	approx. 110 g/m ²
D	approx. 130 g/m ²
E	approx. 250 g/m ²
F	approx. 300 g/m ²
G	approx. 400 g/m ²

Product guide

Coated abrasives



					Page									
Type	Coating	Bonding agent	Waterproof	Available grits	Rolls	File belts	Belts for handheld grinders	Short and long belts	Spirabands	Wide belts	Fibre discs	Strips	Sheets	Discs
CS 308 Y	●	K		40, 60–180, 240				57		88				
LS 309 J	●	K		60–500				58						
LS 309 JF	●	K		60–400, 600	29			59						
LS 309 X	●	K		40–320	29	46		57						
LS 309 XH	●	K		40–180, 240			50							
CS 310 X	●	K		24, 36–320, 400–600				59	74	88				
CS 310 XF	●	K		40–280		46								
CS 311 Y ACT	○	K		36–220				60		89				
LS 312 JF	●	K		60–320, 400				61						
LS 313 JF	●	K		80–240, 320				61						
LS 314 JF	●	K		120, 240–320, 400				62						
LS 318 JF ACT	○	K		80–180, 240, 400				62						
CS 320 Y	●	K	✓	24, 40, 60–120, 180				62		89				
CS 321 X	●	K	✓	80–320, 400, 500, 800				63		90				
CS 322 X	●	K	✓	Polishing fineness				63						
CS 325 Y		K	✓	80, 120, 180, 240, 320, 400, 600, 800, 1200				63						
CS 326 Y		K	✓	60, 80, 120, 180, 240, 320, 400, 600, 800				64		90				
CS 329 Y		K		80, 120, 180, 240, 320, 400, 600				64		91				
CS 330 X	●	K	✓	220, 280, 400, 600, 800				65		91				
CS 333 JF	●	K		120–180, 240–320				66						
CS 333 X	●	K		24, 40, 60–150				65						
CS 333 XF	●	K		60–100, 240, 280				65						
CS 336 Y	○	K		36, 40, 50						92				
CS 341 X	●	K	✓	60–320, 400, 500, 600				66		92				
KL 361 JF	●	K		30, 40–600	30							134	131	
KL 371 X	●	L		30–320, 400									132	
KL 385 JF	●	K		40, 60–320, 400, 600	33								133	
CS 409 Y	●	K		36–120				66		93				
CS 410 X	●	K		40, 60–120, 180				67						
CS 411 X	●	K		24, 36–80, 120				67						
CS 411 Y	●	K	✓	24, 36–120		47		68		93				
CS 412 Y	●	K	✓	24, 36, 40, 60–180, 240				69		94				
CS 416 Y	○	K	✓	24, 36–120				69						
CS 420 Y		K	✓	120, 180, 240, 320, 400				70						
CS 451 X	●	K		40, 60, 80					75					
GX 533 JF	●	K		80–120, 180, 240–320, 400, 600				70						
CS 538 Z ACT	●	K		36–180						94				
CS 631 XF	○	K		60–120				70						
CS 710 XF	●	K		80–180, 240		48		71						
GX 712 JF	●	K		60–320, 400				71						
CS 811 Y ACT	●	K	✓	24, 36–80				72						
CS 910 Y ACT	●	K		24, 36–80				72						
CS 912 Y ACT	●	K	✓	36–180		49		72		95				
CS 931 JF	○	K		80–120, 180, 240–320, 400				73						
GX 931 JF	○	K		60–150, 280				73						

● = close ● = semi-open ○ = open

Bonding agent

K Resin

L Glue

Product guide

Coated abrasives

	Type	Properties	Backing	Grain type
Fibre discs	CS 561		Fibre	Aluminium oxide
	FS 764 ACT		Fibre	Aluminium oxide
	CS 565		Fibre	Zirconia alumina
	CS 570	Multibond	Fibre	Zirconia alumina
	FS 964 ACT		Fibre	Ceramic aluminium oxide
	FS 966 ACT	Multibond	Fibre	Ceramic aluminium oxide
Non-woven web and surface conditioning material	AN 400	Waterproof	Abrasive screen	Aluminium oxide
	NRO 400		Non-woven web	Aluminium oxide
	NRO 500		Non-woven web	SiC
	NPA 400		Non-woven web	Aluminium oxide
	NPA 500		Non-woven web	SiC
	SV 484		Surface conditioning material	Aluminium oxide
	NDS 400 K	Waterproof	Non-woven web with self-fastening	Aluminium oxide / SiC
	NDS 800		Surface conditioning material	Aluminium oxide
	NBF 800	Waterproof	Surface conditioning material	Aluminium oxide
	NBS 800	Waterproof	Surface conditioning material	Aluminium oxide
	FD 500	Waterproof	Foam core	Aluminium oxide / SiC
	SK 500	Abrasive hand block, flexible, waterproof	Sponge	Aluminium oxide
	SK 700 A	Abrasive hand block, waterproof	Sponge	Aluminium oxide
	SW 501	Abrasive sponge, waterproof	Sponge	Aluminium oxide
	SW 501 TR	Abrasive sponge, tear resistant, waterproof	Sponge	Aluminium oxide
	SW 502	Abrasive sponge, waterproof	Sponge	SiC
	SW 510	Abrasive sponge, waterproof	Sponge	Aluminium oxide

Cloth

JF	Cotton, light, highly flexible
GX	Blended cloth, light, flexible
J	Cotton, light
XF	Cotton, heavy, flexible
X	Cotton, heavy
Y	Polyester, heavy, highly firm
Z	Polyester, heavy, highly firm, can be divided into segments

Paper

A	approx. 95 g/m ²
B	approx. 105 g/m ²
C	approx. 110 g/m ²
D	approx. 130 g/m ²
E	approx. 250 g/m ²
F	approx. 300 g/m ²
G	approx. 400 g/m ²

Product guide

Coated abrasives



						Page									
	Type	Coating	Bonding agent	Waterproof	Available grits	Rolls	File belts	Belts for handheld grinders	Short and long belts	Spirabands	Wide belts	Fibre discs	Strips	Sheets	Discs
Fibre discs	CS 561	●	K		16–240, 320							100			
	FS 764 ACT	●	K		24, 36, 40, 60, 80, 120							102			
	CS 565	●	K		24, 36–100							103			
	CS 570	●	K		24, 36–120							104			
	FS 964 ACT	●	K		24, 36–80, 120							105			
	FS 966 ACT	●	K		24, 36–60, 80, 120							106			
Non-woven web and surface conditioning material	AN 400	○	K	✓	80–800	35							129		156
	NRO 400		K		medium, fine, very fine	204									
	NRO 500		K		medium, ultra fine	205									
	NPA 400		K		coarse, medium, very fine								205		
	NPA 500		K		medium, ultra fine, without grain								206		
	SV 484		K		coarse, medium, very fine										208
	NDS 400 K		K	✓	very fine, ultra fine										208
	NDS 800		K		coarse, medium, very fine										209
	NBF 800		K	✓	coarse, medium, very fine		206								
	NBS 800		K	✓	coarse, medium, very fine				207						
	FD 500	●	K	✓	1000, 1500, 2000, 3000										158
	SK 500	●	K	✓	60, 80, 100, 120, 180, 220, 280								135		
	SK 700 A	●	K	✓	60, 80, 100, 120								135		
	SW 501	●	K	✓	120, 220								136		
	SW 501 TR	●	K	✓	100–220								136		
	SW 502	●	K	✓	120, 220								137		
	SW 510	●	K	✓	100, 180, 220, 320								137		

● = close ● = semi-open ○ = open

Bonding agent

K Resin


L Glue

Coated abrasives

Applications guide

Coated abrasives are abrasive products that are made out of more or less flexible backing material upon which grit is anchored with a bonding agent. The product family “coated abrasives” includes abrasive belts, rolls, sheets, strips and discs. They comprise of the following four, optionally also five, components (please refer to the illustration on the right).

- ▶ 1. Backing
- ▶ 2. Base coat
- ▶ 3. Grit
- ▶ 4. Topsize coat
- ▶ 5. Optional: additional coating

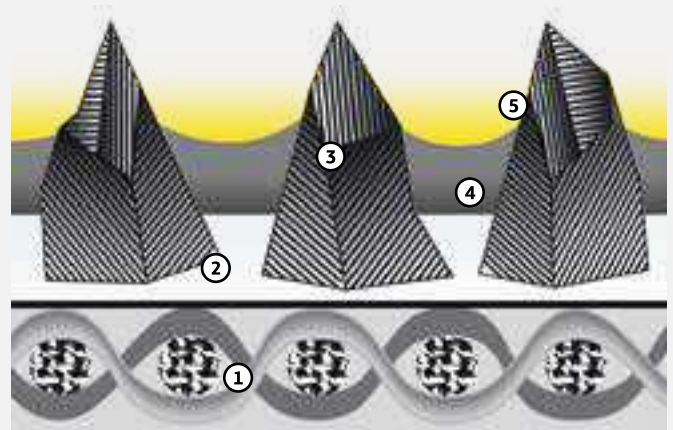

Structure


1. Coated abrasive backing

The backing is coated with grit and transfers stock removal forces onto the workpiece. The following backings are primarily used in the manufacture of coated abrasives:

- ▶ Paper
- ▶ Cotton cloth
- ▶ Polyester cloth

In addition, at Klingspor the following backings are used exclusively for individual products and/or for specific requirements/applications:

- ▶ Fibre (is used exclusively for fibre discs on portable angle grinders)
- ▶ Film (is used exclusively for the products FP 73 W and FP 73 WK)
- ▶ GX-blended cloth (special cotton/polyester blend for flexible yet highly tear resistant belts)

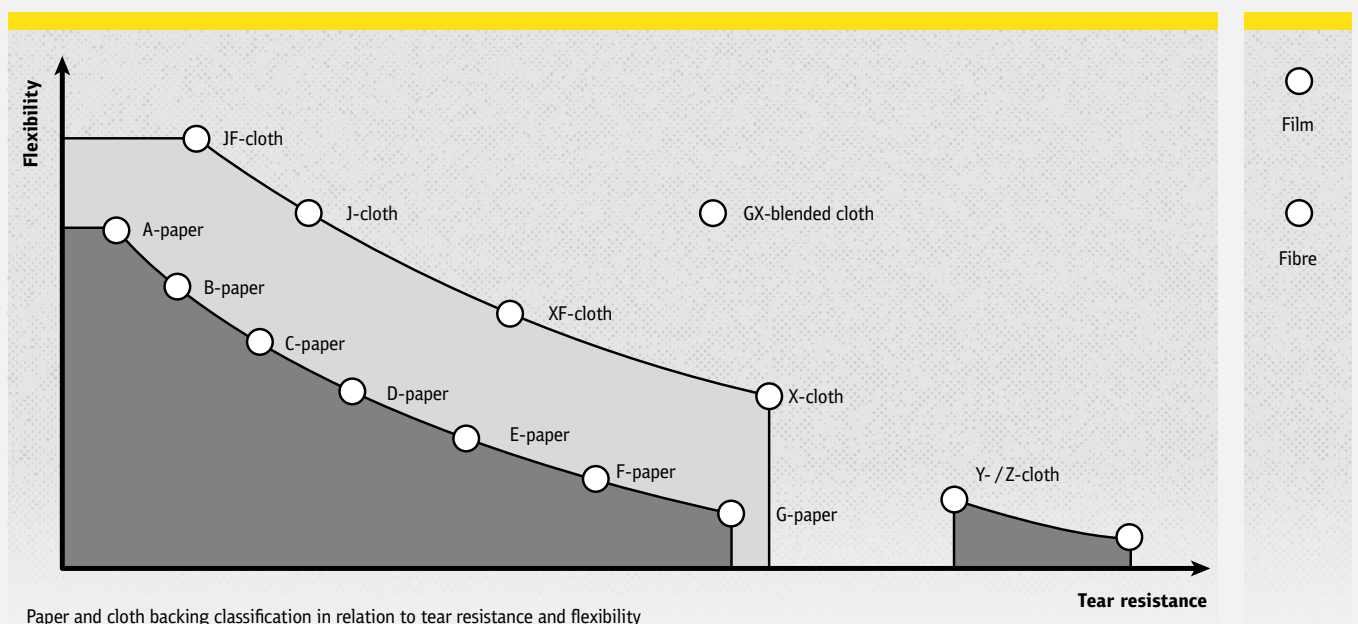

Backing	Description	Application examples
A – paper	approx. 95 g/m ²	profile + surface finishing (hand)
B – paper	approx. 105 g/m ²	profile + surface finishing (hand and machine)
C – paper	approx. 110 g/m ²	surface finishing (hand and machine)
D – paper	approx. 130 g/m ²	surface finishing (hand and machine)
E – paper	approx. 250 g/m ²	surface grinding and sanding (machine)
F – paper	approx. 300 g/m ²	surface grinding and sanding (machine)
G – paper	approx. 400 g/m ²	surface grinding and sanding (machine)
JF – cloth	light, highly flexible	high profiled workpieces (hand and machine)
GX – blended cloth	light, flexible	profiled workpieces (machine)
J – cloth	light, flexible	profiled workpieces (hand and machine)
XF – cloth	heavy, flexible	hand tool belt grinder
X – cloth	heavy, firm	surface and edge grinding and sanding (hand and machine)
Y – polyester	heavy, highly firm	surface and edge grinding and sanding (machine)
Z – polyester	heavy, highly firm, can be segmented	surface grinding (machine)
Film	polyester film	finishing
Fibre	vulcanised fibre	grinding and finishing

2. Base coat

In the base coat step the grit is anchored. The basic bond is the connection between the grit and the backing. It is primarily formed using resin, this provides it with its consistent high quality properties. Glue is only added to a few abrasive papers that are used with hand operated machines and applications.


3. Grit

Grit is responsible for stock removal. When selecting the correct grit two properties are particularly important:

- Bond
- Toughness





All Klingspor grit types are produced synthetically. This ensures a consistently high quality product. Four different grit types are used with coated abrasives:

- Silicon carbide
- Aluminium oxide
- Zirconia alumina
- Ceramic aluminium oxide

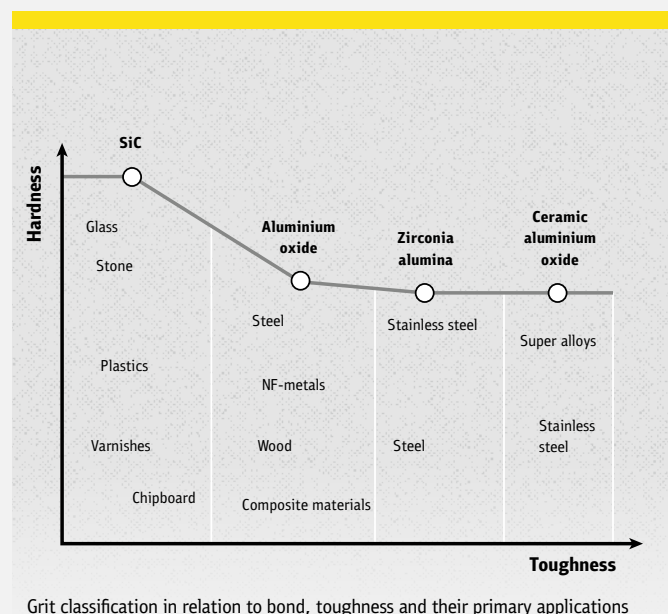


Coated abrasives

Applications guide

Grain type	Bond / toughness	Structure	Properties / wear properties
Silicon carbide (SiC)	very hard / less tough	crystalline	sharp-edged, brittle, highly friable / micro-wear 
Aluminium oxide	hard / tough	crystalline, irregular	wedge-shaped, block grain, even wear 
Zirconia alumina	hard / very tough	crystalline, even	wedge-shaped, block grain / micro-wear, self-sharpening 
Ceramic aluminium oxide	hard / very tough	micro-crystalline	sharp-edged, pointed grit / micro-wear, self-sharpening 

Grit type properties and their specific wear properties

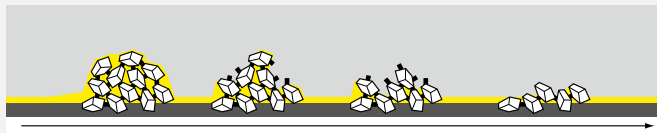

Definition	Description
Close coating	The entire surface of the backing is coated with grit
Semi-open coating	Approx. 75% of the backing surface is coated with grit
Open coating	Approx. 50% of the backing surface is coated with grit

In addition, there are also so-called grit agglomerates. This is not an independent grit type, rather it is a grit agglomeration which is comprised of many individual aluminium-oxide or SiC-grits mixed with a resin bonding agent, which together form a large grit. Agglomerates are used almost exclusively on abrasive belts.

The advantage of agglomerates is that they provide an even finish from the first use to the last. Dull grit breaks off from the agglomerate and creates space for new, sharp grit. The objective is to attain an even finish through continual stock removal and an extremely long service life.

Coating

Moreover, the coated abrasives are coated with different grit coverage densities. The term "grit density" describes the grit coverage density distributed on the backing.

One differentiates between:

- close coating
- semi-open coating
- open coating

Open coated grit has a large space between the individual grits, such that the stock removal and the grinding dust can be extracted more easily from the grinding surface. This prevents premature clogging when working on long-chipping materials, such as wood.

The decision as to which grit density to use is primarily dependent upon how great the likelihood is that the grinding dust will clog the space between the grits.

Grit size chart

	Extra fine												Fine		Coarse		Extra coarse												
	Micro finishing		Finishing										Inter- mediate grinding	Rough grinding															
FEPA																													
	P 2000		P 1500		P 1200	P 1000	P 800	P 600	P 500	P 400	P 360	P 320	P 280	P 240	P 220	P 180	P 150	P 120	P 100	P 80	P 60	P 50	P 40	P 36	P 30	P 24	P 20	P 16	P 12
ANSI																													
					600	500	400	360		320	280		240		220	180	150	120	100	80	60	50	40	36	30	24	20	16	12
JIS																													
	2000	1500	1200	1000	800	600	500	400	360	320	280		240		220	180	150	120	100	80	60	50	40	36	30	24	20	16	12

4. Size coat

The size coat supports the base coat in the anchoring of the grit on the backing and against forces which affect the grit during grinding. The cover bonds are produced exclusively from resin and also provide the product with its typical colour (exceptions are coated abrasives with additional coatings).

5. Special coatings

Special coatings with grinding aids provide the grinding tool properties that positively affect the grinding process and extends the service life of the coated abrasive. Special coatings are applied as an additional layer.

Stearate coating

The stearate on a coated abrasive prevents the clogging and loading of the belt and is specifically suited for high quality varnish surface applications. Paints, varnishes and plastics can become soft and sticky through the heat generated from grinding, this can result in the premature clogging and loading of the belt. The dust clogs the space between the grits and this can result in additional "negative bond". This clogs the grits and the sharp edges are no longer effective. To prevent this from happening or to slow the process down, the coated abrasives can be coated with a non-stick material, so-called stearates.

Multibond

The multibond, like the stearate coating, is applied in an additional production step to the cover bond layer. This allows the cool grinding of stainless steel and high alloy steels, which in turn increases the stock removal rate and service life.

ACT – Advanced Coating Technology

Klingspor uses this technology to improve the properties of the coated abrasives. When working on metal, ACT provides significantly higher grit adhesion, e.g. for aggressive belt grinding of the edges of punched parts and castings. This significantly increases the life of the grinding belt. For belts that are used for wood and varnish sanding, ACT prevents the premature clogging of the coated abrasives and significantly increases the service life.

Antistatic

Electrode migration is the result of friction i.e. grinding between different materials, and in turn causes charge separation, which in the case of non-conductive materials, such as wood, results in the load differences not being balanced. In these cases, the coated abrasive is equipped with antistatic properties that ground the electrical charge through the coated abrasive and the machine. This prevents the grinding dust from adhering to the workpiece, belt and machine.



Rolls



About the product

Our range of abrasive rolls holds an extensive selection of high quality abrasives for use on handheld machines and for hand sanding. The vast selection of backings – from paper to cloth and from combo backings to foam and non-woven web material – combined with the wide range of available grit sizes make Klingspor's rolled abrasives the ideal solution for surface treatment and profile sanding on all common materials – be it wood, metal, and plastic or paint, varnish and filler.

Find the right product in four easy steps

Step 1: Application/Material

Select the material you wish to process from column 1 in the table below.

Step 2: Machine

Specify in column 2 if you will be working with an orbital sander or by hand.

Step 3: Shape

Decide in column 3 if the abrasive needs to be suitable for use on level surfaces, for applications on profiled workpieces or for both. The symbols used in the table indicate for each application whether the application is a main application (●) or a possible application (○).

Step 4: Decision

Based on your pre-selection, you can pick the abrasive in column 4 of the table that matches your specific use case best. Turn to pages 14 and 15 if you require more detailed information on the listed product characteristics of grain, coating and backing.

Type	Grit range
PS 22 F ACT	40–150
PS 28 F	60–150
PS 29 F ACT	60–150
CS 308 Y	40–80, 120
LS 309 X	40–360
LS 309 J	60–320
LS 309 JF	60–400
CS 310 X	24–400
CS 310 XF	40–280
LS 312 JF	60–320, 400
CS 321 X	80–400
CS 333 X	60, 80, 120, 150
CS 341 X	50–320
KL 361 JF	40–600
KL 385 JF	40–600
CS 410 X	60–120
CS 411 X	24–120
CS 411 Y	36–80

Paper	
B	approx. 105 g/m ²
C	approx. 110 g/m ²
D	approx. 130 g/m ²
E	approx. 250 g/m ²
F	approx. 300 g/m ²
Cloth	
X	Cotton, heavy
J	Cotton, light
JF	Cotton, light, highly flexible
Y	Polyester, heavy, high strength
XF	Cotton, heavy, flexible

Minimum order quantities for made to order items

Width	Minimum order quantities	Width	Minimum order quantities
10 mm	29 pieces	80 mm	3 pieces
15 mm	19 pieces	95 mm	3 pieces
20 mm	14 pieces	100 mm	3 pieces
25 mm	12 pieces	120 mm	2 pieces
28 mm	10 pieces	125 mm	2 pieces
30 mm	10 pieces	140 mm	2 pieces
35 mm	8 pieces	150 mm	2 pieces
40 mm	7 pieces	250 mm	1 piece
50 mm	6 pieces	300 mm	1 piece
60 mm	5 pieces		



The standard length for production rolls is 50M.

We reserve the right to over-deliver or under-deliver made to order items.

Other sizes and grits available on request.

Rolls

Product finder

Application / material	Machine		Form		Product		Product properties			
	Hand sanding	Orbital sander	Profile	Surface	Standard	Premium	Bonding agent	Grain	Coating	Backing
Wood		●		●	<i>PS 22 N</i>		Resin	Aluminium oxide	○	E-paper
		●		●		<i>PS 22 F ACT</i>	Resin	Aluminium oxide	●	F-paper
		●		●		<i>PS 29 F ACT</i>	Resin	Aluminium oxide	○	F-paper
	●	●	●	●		<i>LS 309 JF</i>	Resin	Aluminium oxide	●	JF-cotton
	●	●	●	○	<i>PL 31 B</i>		Glue	Aluminium oxide	○	B-paper
	●		○	●	<i>PS 30 D</i>		Resin	Aluminium oxide	○	D-paper
		●		●		<i>AN 400</i>				
Varnish, paint, plastics	●		●	○	<i>PL 31 B</i>		Glue	Aluminium oxide	○	B-paper
	●		○	●	<i>PS 30 D</i>		Resin	Aluminium oxide	○	D-paper
	●	●	●	●		<i>PS 33 B</i>	Resin	Aluminium oxide	○	B-paper
	●	●	●	●		<i>PS 33 C</i>	Resin	Aluminium oxide	○	C-paper
	●		●	○		<i>PS 73 BWF</i>	Resin	Aluminium oxide	○	B-paper + foam core
	●		●	○		<i>PS 73 CWF</i>	Resin	Aluminium oxide	○	C-paper + foam core
		●		●		<i>AN 400</i>				
Metals	●		●	○	<i>KL 385 JF</i>		Resin	Aluminium oxide	●	JF-cotton
	●		●	○		<i>KL 361 JF</i>	Resin	Aluminium oxide	●	JF-cotton
	●	●		●		<i>LS 309 X</i>	Resin	Aluminium oxide	●	X-cotton
	●	●	●	●		<i>LS 309 JF</i>	Resin	Aluminium oxide	●	JF-cotton



Width x length [mm]	Grit size																		Page
	30	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	
115 x 50000		●		●	●	●	●	●	●	○	●		○		○				23
95 x 50000				●	●	●	●	●	●										
110 x 50000		●		●	●	●	●	●	●	○	●	○	○	○	○				
115 x 50000		●		●	●	●	●	●	●	●	●	○	○	○	○				22
150 x 50000				○	●	●	●	○	○	○	○	○	○	○	○				
200 x 50000		●		●	●	○	●	○	○	○	○	○	○	○	○				
110 x 50000		○	○	○	●	●	●	●	●	○	○	○	○		○				27
115 x 50000		○	○	●	●	●	●	●	○	○	○	○	○		○				
1) ¹⁾				○	○	○	○	○	○	○	○	○	○		○		○	○	29
95 x 50000		●	○	●	●	●	●	○	●	○	●	○	○		○				
110 x 50000		●	○	●	●	●	●	●	●	●	●	●	●		●				24
115 x 50000		●	○	●	●	●	●	●	●	●	●	●	●		●				
115 x 4500		●		●	●	●	●	●	●	○	○		○						23
115 x 50000		●		●	●	●	●	●	●	○	●		●						
																			35
95 x 50000		●	○	●	●	●	●	○	●	○	●	○	○		○				
110 x 50000		●	○	●	●	●	●	●	●	●	●	●	●		●				24
115 x 50000		●	○	●	●	●	●	●	●	●	●	●	●		●				
115 x 4500		●		●	●	●	●	●	●	○	○		○						
115 x 50000		●		●	●	●	●	●	●	○	●		●						23
110 x 50000								●	●	●	●	●	●		●	○	○		26
115 x 50000								●	●	●	●	●	●		●	○	○		
110 x 50000		○		●	●	●	●												25
115 x 50000		○		●	●	●	●												
115 x 25000								●	●		●		●		●		●		28
115 x 25000							●												27
																			35
25 x 50000		○	○	●	●	●	●	○	○	○	○	○	○		○		○		
40 x 50000		●	○	●	●	●	●	●	●	●	●	○	●		●		○		33
50 x 50000		●	○	●	●	●	●	●	●	●	●	○	●		●		○		
115 x 50000		●	○	●	●	●	●	●	●	○	●	○	●		●		○		
80 x 50000	○	○	○	○	●	○	●	●	○	○	○	○	○	○	○	○	○		
100 x 50000	○	●	●	●	●	●	●	●	●	●	●	○	●	○	●	○	●		
110 x 50000	○	●	○	●	●	●	●	○	●	○	●	○	○	○	○	○	○		30
115 x 50000	○	●	○	●	●	●	●	●	●	○	●	○	●	○	○	○	○		
120 x 50000	○	○	○	●	●	●	●	○	●	○	○	○	○	○	○	○	○		
150 x 50000	○	●	○	●	●	●	●	●	○	○	○	○	○	○	○	○	○		
1) ¹⁾		○	○	○	○	○	○	○	○	○	○	○	○		○				29
1) ¹⁾				○	○	○	○	○	○	○	○	○	○		○		○	○	30

Rolls with paper backing

Coated abrasives

Abrasive paper

PS 22 F ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	F-paper

Applications:

Wood	●	NF metals	●
Metals	○		
Plastic	○		
Steel	○		

Advantages: High abrasive performance - Uniform, fine surface scratch pattern - Premium product for use on hardwood, varnish, filler - Long service life and minimal clogging due to ACT recipe - High edge stability

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
95 x 50000	60	1	20822
95 x 50000	80	1	20850
95 x 50000	100	1	20884
95 x 50000	120	1	20916
95 x 50000	150	1	20940
95 x 50000	180	1	20960
110 x 50000	40	1	2969
110 x 50000	60	1	2971
110 x 50000	80	1	2972
110 x 50000	100	1	2973
110 x 50000	120	1	2974
110 x 50000	150	1	2975
110 x 50000	180	1	2976
110 x 50000	240	1	2978
115 x 50000	40	1	2983
115 x 50000	60	1	2985
115 x 50000	80	1	2986
115 x 50000	100	1	2987
115 x 50000	120	1	2988
115 x 50000	150	1	2989
115 x 50000	180	1	2990
115 x 50000	220	1	2991
115 x 50000	240	1	2992
150 x 50000	80	1	3014
150 x 50000	120	1	3016
200 x 50000	40	1	3053
200 x 50000	60	1	3055
200 x 50000	80	1	3056
200 x 50000	120	1	3058

Rolls with paper backing

Coated abrasives



Rolls

Abrasive paper

PS 22 N



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	E-paper

Applications:

Wood	●	Steel	○
Metals	○		
Paint/Varnish/Filler	○		
Plastic	○		

Advantages: Universal product for hand sanding and handheld machine sanding of virtually any material - Large grit range allows use from rough sanding to finishing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 50000	40	1	244611
115 x 50000	60	1	244612
115 x 50000	80	1	244613
115 x 50000	100	1	244614
115 x 50000	120	1	244615
115 x 50000	150	1	244616
115 x 50000	180	1	244599
115 x 50000	240	1	244597

Abrasive paper

PS 30 D



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	D-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	○

Advantages: Sharp grit and high aggressiveness for use on wood, varnish, fillers - Flexible and tear resistant, easy folding - Product with good price-performance ratio

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 4500	40	10	174094
115 x 4500	60	10	174095
115 x 4500	80	10	174096
115 x 4500	100	10	174097
115 x 4500	120	10	174098



Rolls with paper backing

Coated abrasives

►► Continuation of PS 30 D, Abrasive paper

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 4500	150	10	174099
115 x 4500	180	10	174100
115 x 50000	40	1	174086
115 x 50000	60	1	174088
115 x 50000	80	1	174089
115 x 50000	100	1	174090
115 x 50000	120	1	174091
115 x 50000	150	1	174092
115 x 50000	180	1	174093
115 x 50000	240	1	182418
115 x 50000	320	1	182419

Finishing paper

PL 31 B



Properties

Bonding agent	Glue
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	○

Advantages: Product with optimal price-performance ratio - Optimized wear properties for hand sanding and handheld machine sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
95 x 50000	60	1	3281
95 x 50000	80	1	3282
95 x 50000	100	1	3191
95 x 50000	120	1	3192
95 x 50000	180	1	3194
95 x 50000	240	1	3196
110 x 50000	40	1	3287
110 x 50000	60	1	3289
110 x 50000	80	1	3290
110 x 50000	100	1	3213
110 x 50000	120	1	3214
110 x 50000	150	1	3215
110 x 50000	180	1	3216
110 x 50000	220	1	3217
110 x 50000	240	1	3218
110 x 50000	280	1	3219
110 x 50000	320	1	3220
110 x 50000	400	1	3222
115 x 50000	40	1	3291



Rolls with paper backing

Coated abrasives



Rolls

►► Continuation of PL 31 B, Finishing paper

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 50000	60	1	3293
115 x 50000	80	1	3294
115 x 50000	100	1	3224
115 x 50000	120	1	3225
115 x 50000	150	1	3226
115 x 50000	180	1	3227
115 x 50000	220	1	3228
115 x 50000	240	1	3229
115 x 50000	280	1	3230
115 x 50000	320	1	3231
115 x 50000	400	1	3233

Abrasive paper

PS 33 C



Properties

Bonding agent Resin	
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○

Advantages: Very high removal rate - Minimal clogging due to active abrasive substances - Longer service life - Good tear resistance and flexibility

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
110 x 50000	60	1	146981
110 x 50000	80	1	146982
110 x 50000	100	1	146983
110 x 50000	120	1	146386
115 x 50000	60	1	155815
115 x 50000	80	1	147575
115 x 50000	100	1	147576
115 x 50000	120	1	153398

Rolls with paper backing

Coated abrasives

Abrasive paper

PS 33 B



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○

Advantages: Very high removal rate - Minimal clogging due to active abrasive substances - Longer service life - Good tear resistance and flexibility

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
110 x 50000	150	1	148494
110 x 50000	180	1	147935
110 x 50000	220	1	148495
110 x 50000	240	1	147114
110 x 50000	280	1	148496
110 x 50000	320	1	147110
110 x 50000	400	1	146387
115 x 50000	150	1	153177
115 x 50000	180	1	149480
115 x 50000	220	1	149698
115 x 50000	240	1	147055
115 x 50000	280	1	165031
115 x 50000	320	1	148891
115 x 50000	400	1	145520

Rolls with paper backing

Coated abrasives



Rolls

Abrasive paper, ANTISTATIC

PS 29 F ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Open
Backing	F-paper

Applications:

Wood	●
Paint/Varnish/Filler	○

Advantages: High aggressiveness and long service life when used on wood (especially softwood) due to ACT recipe - High edge stability - Premium product for wood in general, varnish and filler

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
110 x 50000	80	1	307878
110 x 50000	100	1	307879
110 x 50000	120	1	307880
110 x 50000	150	1	307881
110 x 50000	180	1	307882
115 x 50000	60	1	307884
115 x 50000	80	1	302592
115 x 50000	100	1	307885
115 x 50000	120	1	302591
115 x 50000	150	1	307886

Abrasive paper with foam backing

PS 73 CWF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper + foam core

Applications:

Wood	●
Paint/Varnish/Filler	●
Plastic	●

Advantages: Very good distribution of sanding pressure due to elastic and conforming foam backing, therefore preventing over sanding of thin coatings and providing a very fine finish - High flexibility and very good adaptability to contours and profiles - Reduced clogging due to additional stearate coating and semi-open coated grain - Easy handling by tearing handy pads from a pre-perforated roll out of a dispenser box - Dimensions of abrasive pads: 115 x 140 mm, approx. 180 pcs

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 25000	120	1	321755

Rolls with paper backing

Coated abrasives

Abrasive paper with foam backing

PS 73 BWF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper + foam core

Applications:

Wood	●
Paint/Varnish/Filler	●
Plastic	●

Advantages: Very good distribution of sanding pressure due to elastic and conforming foam backing, therefore preventing over sanding of thin coatings and providing a very fine finish - High flexibility and very good adaptability to contours and profiles - Reduced clogging due to additional stearate coating and semi-open coated grain - Easy handling by tearing handy pads from a pre-perforated roll out of a dispenser box - Dimensions of abrasive pads: 115 x 140 mm, approx. 180 pcs

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 25000	150	1	325711
115 x 25000	180	1	321756
115 x 25000	240	1	321757
115 x 25000	320	1	321758
115 x 25000	400	1	321760
115 x 25000	600	1	325022

Rolls with cloth backing

Coated abrasives



Abrasive cloth

LS 309 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
Wood	●

Advantages: High-quality universal abrasive cloth for diverse applications in metal and woodworking - Good price-performance ratio

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth

LS 309 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Metals	●
Wood	●

Advantages: High abrasive performance - Fine surface scratch pattern - Very good adaptation to contours, tight radiuses and profiles due to highly flexible cotton cloth

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Rolls with cloth backing

Coated abrasives

Abrasive cloth

LS 309 JF slashed



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Metals	●
Wood	●

Advantages: Outstanding adaptation for use on turned parts - Individual applications due to different slotting variants

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth, brown

KL 361 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Stainless steel	●	Wood	●
Steel	●	Plastic	○
Metals	●		
NF metals	●		

Advantages: High-quality universal abrasive cloth - Optimal adaptation to workpiece contours - Tears off cleanly and easily from the roll

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
25 x 50000	40	1	3769
25 x 50000	60	1	3771
25 x 50000	80	1	3772
25 x 50000	100	1	3773
25 x 50000	120	1	3774
25 x 50000	150	1	3775
25 x 50000	180	1	3776
25 x 50000	220	1	3777
25 x 50000	240	1	3778
25 x 50000	320	1	3780
25 x 50000	400	1	3782
25 x 50000	600	1	64825
30 x 50000	60	1	3787



Rolls with cloth backing

Coated abrasives



►► Continuation of KL 361 JF, Abrasive cloth, brown

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
30 x 50000	80	1	91286
30 x 50000	100	1	3789
30 x 50000	120	1	3790
30 x 50000	150	1	3791
30 x 50000	180	1	3792
30 x 50000	240	1	3794
30 x 50000	320	1	3796
30 x 50000	400	1	3798
40 x 25000	40	1	4201
40 x 25000	50	1	4202
40 x 25000	60	1	4203
40 x 25000	80	1	4204
40 x 25000	100	1	4205
40 x 25000	120	1	4206
40 x 25000	150	1	4207
40 x 25000	180	1	4208
40 x 25000	220	1	4209
40 x 25000	240	1	4210
40 x 25000	320	1	4212
40 x 25000	400	1	4214
40 x 50000	40	1	3833
40 x 50000	60	1	3835
40 x 50000	80	1	3836
40 x 50000	100	1	3837
40 x 50000	120	1	3838
40 x 50000	150	1	3839
40 x 50000	180	1	3840
40 x 50000	220	1	3841
40 x 50000	240	1	3842
40 x 50000	280	1	3843
40 x 50000	320	1	3844
40 x 50000	360	1	3845
40 x 50000	400	1	3846
40 x 50000	600	1	64830
50 x 25000	40	1	4217
50 x 25000	60	1	4219
50 x 25000	80	1	4220
50 x 25000	100	1	4221
50 x 25000	120	1	4222
50 x 25000	150	1	4223
50 x 25000	180	1	4224
50 x 25000	220	1	4225
50 x 25000	240	1	4226
50 x 25000	320	1	4228
50 x 25000	400	1	4230
50 x 25000	600	1	64831
50 x 50000	40	1	3849
50 x 50000	50	1	3850
50 x 50000	60	1	3851
50 x 50000	80	1	3852
50 x 50000	100	1	3853



Rolls with cloth backing

Coated abrasives

►► Continuation of KL 361 JF, Abrasive cloth, brown

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
50 x 50000	120	1	3854
50 x 50000	150	1	3855
50 x 50000	180	1	3856
50 x 50000	220	1	3857
50 x 50000	240	1	3858
50 x 50000	280	1	3859
50 x 50000	320	1	3860
50 x 50000	360	1	3861
50 x 50000	400	1	3862
50 x 50000	500	1	3863
50 x 50000	600	1	64832

Abrasive cloth, brown

KL 361 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Stainless steel	●	Wood	●
Steel	●	Plastic	○
Metals	●		
NF metals	●		

Advantages: High-quality universal abrasive cloth - Optimal adaptation to workpiece contours - Tears off cleanly and easily from the roll

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
80 x 50000	80	1	3900
80 x 50000	120	1	3902
80 x 50000	150	1	3903
100 x 50000	40	1	3913
100 x 50000	50	1	3914
100 x 50000	60	1	3915
100 x 50000	80	1	3916
100 x 50000	100	1	3917
100 x 50000	120	1	3918
100 x 50000	150	1	3919
100 x 50000	180	1	3920
100 x 50000	220	1	3921
100 x 50000	240	1	3922
100 x 50000	320	1	3924
100 x 50000	400	1	3926
100 x 50000	600	1	64835
110 x 50000	40	1	3929
110 x 50000	60	1	3931
110 x 50000	80	1	3932



Rolls with cloth backing

Coated abrasives



Rolls

►► Continuation of KL 361 JF, Abrasive cloth, brown

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
110 x 50000	100	1	3933
110 x 50000	120	1	3934
110 x 50000	180	1	3936
110 x 50000	240	1	3938
115 x 50000	40	1	3945
115 x 50000	60	1	3947
115 x 50000	80	1	3948
115 x 50000	100	1	3949
115 x 50000	120	1	3950
115 x 50000	150	1	3951
115 x 50000	180	1	3952
115 x 50000	240	1	3954
115 x 50000	320	1	3956
120 x 50000	60	1	3963
120 x 50000	80	1	3964
120 x 50000	100	1	3965
120 x 50000	120	1	3966
120 x 50000	180	1	3968
150 x 50000	40	1	3977
150 x 50000	60	1	3979
150 x 50000	80	1	3980
150 x 50000	100	1	3981
150 x 50000	120	1	3982
150 x 50000	150	1	3983

Abrasive cloth, brown

KL 385 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Metals	●	Wood	●
NF metals	●		
Stainless steel	○		
Plastic	○		



Advantages: Attractively priced universal product for profile grinding - Optimal adaptation to workpiece contours - Tears off cleanly and easily from the roll

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
25 x 50000	60	1	218196
25 x 50000	80	1	218197
25 x 50000	100	1	218198
25 x 50000	120	1	218199
40 x 50000	40	1	218077
40 x 50000	60	1	218079



Rolls with cloth backing

Coated abrasives

►► Continuation of KL 385 JF, Abrasive cloth, brown

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
40 x 50000	80	1	218080
40 x 50000	100	1	218081
40 x 50000	120	1	218082
40 x 50000	150	1	218083
40 x 50000	180	1	218084
40 x 50000	220	1	218085
40 x 50000	240	1	218086
40 x 50000	320	1	218088
40 x 50000	400	1	218090
50 x 50000	40	1	218094
50 x 50000	60	1	218096
50 x 50000	80	1	218097
50 x 50000	100	1	218098
50 x 50000	120	1	218099
50 x 50000	150	1	218100
50 x 50000	180	1	218101
50 x 50000	220	1	218102
50 x 50000	240	1	218103
50 x 50000	320	1	218105
50 x 50000	400	1	218107

Abrasive cloth, brown

KL 385 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Metals	●
NF metals	●
Stainless steel	⦿
Plastic	⦿

Wood	⦿
------	---

Advantages: Attractively priced universal product for profile grinding - Optimal adaptation to workpiece contours - Tears off cleanly and easily from the roll

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 5000	60	1	278789
115 x 5000	80	1	278790
115 x 5000	120	1	278791
115 x 5000	320	1	278792
115 x 50000	40	1	224650
115 x 50000	60	1	228151
115 x 50000	80	1	228363
115 x 50000	100	1	228364
115 x 50000	120	1	228365
115 x 50000	150	1	228370



Rolls with cloth backing / Abrasive screen

Coated abrasives



►► Continuation of KL 385 JF, Abrasive cloth, brown

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 50000	180	1	228366
115 x 50000	240	1	228367
115 x 50000	320	1	228368
115 x 50000	400	1	228369

ROLL-BOX

ROLL-BOX



Advantages: Handy and saves storage of economy rolls - Abrasive tears off cleanly and easily - Quick and simple replacement of rolls - For 5 rolls with a width of 50 mm each - For set-up or attachment to the wall

Abrasives not included

Width x Length x Height in mm	Packing unit/pcs.	Cat. number
300 x 340 x 230	1	76403

Abrasive screen, self-fastening, waterproof

AN 400



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Backing	Polyester screen

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Gel coats	●	Wood	●
Plaster	●	Wood-based materials	●
Plasterboard walls	●		

Advantages: Effective and full-surface dust extraction thanks to open grid structure - Dust-free grinding extends the service life of the abrasive - At the same time, improved health and safety thanks to reduced dust formation at the work station - Independent of existing extraction hole patterns - Waterproof

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 10000	80	1	348458
115 x 10000	100	1	353063
115 x 10000	120	1	348418
115 x 10000	150	1	349059



Abrasive screen / Graphite coated canvas / Self-fastening support

► Continuation of AN 400 Abrasive screen, self-fastening, waterproof

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 10000	180	1	353062
115 x 10000	240	1	349058
115 x 10000	320	1	353061
115 x 10000	400	1	353060

Graphite coated canvas

CS 395 X



Properties

Grain	Graphite
Coating	Lamellar
Backing	X-cloth
Thickness	1,5 mm

Advantages: Reduces friction between the back side of the belt and the contact element - Reduces heat generation during the grinding process - Enables a smooth and constant grinding

No self-fastening support

All sizes and minimum purchasing quantities available on request

Self-fastening support

CS 396 Y



Properties

Engaging elements	Mushroom heads
Thickness	1,5 mm
Temperature range	-30° to +80°

Advantages: Can be cut to size easily - Simple and safe fixing on smooth and even surfaces - Allows a quick change of the abrasive

All sizes and minimum purchasing quantities available on request

Notes



Rolls



Abrasive belts

About the product

Applications guide

- Suitable for all sanding and grinding operations: with unsupported belt, sander pad and contact wheel
- Special designs for customised applications, e.g. for furniture production to enable fast and clean preparation of large surfaces ready for painting
- Wide range of sizes
- Backings made of paper, cloth and film
- Superior tear resistance of all products

Application	Type	Grain	Backing	Coating	Characteristics	Page
Steel	LS 309 J	Aluminium oxide	J-cotton	●	Flexible abrasive cloth for processing slightly profiled workpieces, high stock removal rate, particularly suited for metal	58
	LS 309 JF	Aluminium oxide	JF-cotton	●	Highly flexible abrasive cloth for highly profiled workpieces for the manufacture of fine surfaces in metal and woodworking	59
	LS 309 X	Aluminium oxide	X-cotton	●	Universal abrasive cloth for metal and woodworking, good price-performance ratio	46, 57
	LS 309 XH	Aluminium oxide	X-cotton	●	Standard quality for portable belt sanders, especially suited for the processing of metal, wood, paint and varnish	50
	CS 310 X	Aluminium oxide	X-cotton	●	Abrasive cloth for metal and woodworking with stable cloth backing, for heavy duty with particularly long service life	59, 74, 88
	CS 341 X	Aluminium oxide	X-cotton waterproof	●	Waterproof abrasive cloth for wet grinding on steel and stainless steel, particularly suited for centreless and surface grinding	66, 92
	CS 308 Y	Aluminium oxide	Y-polyester	●	Polyester abrasive cloth with close coating for working with metal and surface grinding of hardwood	57, 88
Stainless steel	PS 61 F	Ceramic aluminium oxide	F-paper	●	Close coating, tear resistant backing and continuously self-sharpening ceramic grain, the perfect product for users with highest demands on service life, high stock removal rate and process reliability, for the processing of stainless steel surfaces	55, 86
	LS 312 JF	Aluminium oxide	JF-cotton	●	Highly versatile and flexible premium product for stainless steel components such as fixtures, fittings and surgical instruments	61
	LS 313 JF	Aluminium oxide	JF-cotton	●	Highly flexible high quality product for stainless steel shaped parts, additional multibond for cool grinding and long service life	61
	CS 931 JF	Ceramic aluminium oxide	JF-cotton	⦿	Special product with highly flexible backing for use on stainless steel and high alloy steels. Continuously aggressive abrasive performance with a long service life due to semi-open coated self-sharpening ceramic grit. Multibond for cool grinding with no discolouration	73
	GX 931 JF	Ceramic aluminium oxide	JF-blended cloth	⦿	Special highly flexible tear resistant polyester / cotton backed product for stainless steel and high alloy steels; ideal for robot applications. Micro-crystalline ceramic grit with multibond for "cool grinding" and continuously aggressive abrasive performance	73
	GX 712 JF	Aluminium oxide	JF-blended cloth	●	High performance belt with highly flexible, but nonetheless equipped with extremely tear resistant blended cloth backing, tempered aluminium oxide and coated materials	71
	CS 631 XF	Ceramic aluminium oxide	XF-cotton	⦿	Flexible highly efficient belt for best grinding performance, long service life through self-sharpening ceramic grain for rough and intermediate grinding of contours, profiles and fittings, with multibond for cool grinding	70
	CS 410 X	Aluminium oxide	X-cotton	●	Abrasive material with stable cloth backing, multibond for long service life, especially suited for stainless steel processing	67
	CS 411 X	Zirconia alumina	X-cotton	●	High performance belt with high stock removal rate for rough grinding and deburring of steel and stainless steel	67
	CS 411 Y	Zirconia alumina	Y-polyester	●	Particularly tear resistant high performance belt with high stock removal rate for rough grinding and deburring of stainless steel and steel	47, 68, 93
	CS 416 Y	Zirconia alumina	Y-polyester	⦿	Extra tear resistant abrasive belt with high stock removal rates for grinding steel and stainless steel with a semi-open coating	69
	CS 409 Y	Zirconia alumina	Y-polyester	●	Extremely tear resistant high performance belt with high stock removal efficiency and long service life due to additional multibond, for stainless steel and high alloy steels, cool grinding	66, 93

● = close ⦿ = semi-open ○ = open

Abrasive belts

Applications guide

Application	Type	Grain	Backing	Coating	Characteristics	Page
Stainless steel	CS 912 Y ACT	Ceramic aluminium oxide	Y-polyester	●	Extremely tear resistant high performance belt with self-sharpening ceramic grain for high stock removal efficiency and long service life for processing high alloy steels	49, 72, 95
	CS 910 Y ACT	Ceramic aluminium oxide	Y-polyester	●	Extremely tear resistant high performance belt with self-sharpening ceramic grain for high stock removal efficiency and long service life for processing high alloy steels, multibond for cool grinding	72
	CS 330 X	SiC / cork	X-cotton waterproof	●	Special belt for steel and stainless steel on surface belt grinders and circular grinding machines, particularly suitable for satin polishing and finishing	65, 91
	CS 326 Y	Aluminium oxide agglomerate	Y-polyester		Long life belt for wet grinding with uniform scratch pattern for centreless circular and surface grinding	64, 90
	CS 329 Y	Aluminium oxide agglomerate	Y-polyester		Long life belt with consistent surface finish for centreless circular and surface grinding. Aggressive grinding behaviour with low tool pressure	64, 91
	CS 420 Y	Aluminium oxide agglomerate	Y-polyester		Special product with cylindrical-shaped structured abrasive grain for the centreless finishing of stainless steel. Very long service life and uniform scratch pattern	70
	CS 325 Y	SiC agglomerate	Y-polyester		Long life belt with consistent surface finish for centreless finishing	63
	CS 451 X	Zirconia alumina	X-cotton	●	Abrasive cloth with a stable backing for use under heavy load. Especially well suited for work on stainless steel	75
Steel / Stainless steel	PS 20 F	Aluminium oxide	F-paper	●	Close coating and heavy, tear resistant backing for high stock removal rate and a long service life for metalworking	52, 82
	PS 21 F	Zirconia alumina	F-paper	●	Close coating, tear resistant backing and high quality, self-sharpening zirconia alumina grain for a long service life and high grinding performance particularly on stainless steel surfaces	52, 82
	PS 529 F	SiC agglomerate	F-paper		Long life abrasive belt for a brilliant and glossy finish at low to medium tool pressure. Extra long service life at consistent surface roughness. Ideal for dry sanding applications performed with wide belt and long belt sanders	56, 87
	PS 729 F	Aluminium oxide agglomerate	F-paper		Long life belt for dry grinding applications, for a constant surface quality for pre-grinding until finishing. Specially developed for coil and sheet grinding with intermediate contact pressure	87
	CS 412 Y	Aluminium oxide	Y-polyester	●	Sturdy and highly tear resistant polyester backing for coarse and intermediate grinding on metal	69, 94
	CS 310 XF	Aluminium oxide	XF-cotton	●	Flexible abrasive cloth for profiled metal formed parts, standard quality for use with hand tool belt grinders	46
	CS 411 X	Zirconia alumina	X-cotton	●	High performance belt with high stock removal rate for rough grinding and deburring of steel and stainless steel	67
	CS 411 Y	Zirconia alumina	Y-polyester	●	Particularly tear resistant high performance belt with high stock removal rate for rough grinding and deburring of stainless steel and steel	47, 68, 93
	CS 416 Y	Zirconia alumina	Y-polyester	⦿	Extra tear resistant abrasive belt with high stock removal rates for grinding steel and stainless steel with a semi-open coating	69
	CS 330 X	SiC / cork	X-cotton waterproof	●	Special belt for steel and stainless steel on surface belt grinders and circular grinding machines, particularly suitable for satin polishing and finishing	65, 91
	CS 710 XF	Aluminium oxide	XF-cotton	●	Flexible abrasive belt with hardened aluminium oxide grains for working on surfaces and moulded parts	48, 71
	CS 811 Y ACT	Zirconia alumina	Y-polyester	●	Excellent grain adhesion, stable, highly tear resistant polyester backing for particularly heavy duty during rough grinding and deburring of steel and stainless steel. High quality zirconia alumina for highest aggressiveness over the complete service life	72
NF metals	CS 333 JF	SiC	JF-cotton	●	Highly flexible abrasive belt for metal shaped parts, particularly suited for NF metals	66
	CS 333 XF	SiC	XF-cotton	●	Flexible abrasive belt for metal shaped parts, particularly for NF metals	65
	GX 533 JF	SiC	JF-blended cloth	●	Flexible belt with aggressive, hard SiC grit and flexible blended cloth backing for grinding profiles, contours and formed/shaped parts, e.g. fittings	70
	GX 712 JF	Aluminium oxide	JF-blended cloth	●	High performance belt with highly flexible, but nonetheless equipped with extremely tear resistant blended cloth backing, tempered aluminium oxide and coated materials	71
	LS 314 JF	Aluminium oxide	JF-cotton	●	Flexible abrasive belt with hardened aluminium oxide grains for working on surfaces and moulded parts	62
Wood	PS 22 F ACT	Aluminium oxide	F-paper	●	Close coating for maximum stock removal and uniform scratch pattern regarding surface treatment of hard, low content woods. Advanced Coating Technology (ACT) and antistatic properties prevent premature clogging	52, 83
	PS 28 F	Aluminium oxide	F-paper	○	Open coating and antistatic properties prevent premature clogging of the belt with sanding dust, sturdy, tear resistant backing, for all kinds of wood, particularly soft and high resin woods, e.g. spruce, pine	54, 85
	PS 29 F ACT	Aluminium oxide	F-paper	○	Abrasive belt with outstanding service life. Open coating, antistatic properties as well as Advanced Coating Technology (ACT) prevent premature clogging. The abrasive paper is particularly suitable for processing soft and high resin woods	54, 85
	PS 38 G ACT	SiC	G-paper	●	Special product with very strong and robust G-weight paper backing, excellent antistatic properties and sharp-edged silicon carbide grain, for finishing of particle boards and fibreboards	86

● = close ⦿ = semi-open ○ = open

Continuation →

Abrasive belts

Applications guide



Application	Type	Grain	Backing	Coating	Characteristics	Page
Wood	LS 309 X	Aluminium oxide	X-cloth	●	Universal abrasive cloth for metal and woodworking, good price-performance ratio	46, 57
	LS 309 XH	Aluminium oxide	X-cloth	●	Standard quality for portable belt sanders, especially suited for the processing of metal, wood, paint and varnish	50
	CS 311 Y ACT	Aluminium oxide	Y-polyester	○	Aluminium oxide quality with an open coating on tear resistant polyester backing for calibration and intermediate sanding when working with wood	60, 89
	CS 308 Y	Aluminium oxide	Y-polyester	●	Polyester abrasive cloth with close coating for working with metal and sanding of hardwood	57, 88
	LS 318 JF ACT	Aluminium oxide	JF-cloth	○	Highly flexible J-Flex backing for intermediate sanding and finishing of highly profiled and curved wooden parts. Advanced Coating Technology (ACT) and antistatic properties prevent premature clogging	62
	CS 538 Z ACT	SiC	Z-polyester (can be segmented)	●	Special product for the timber products industry. A close coating and antistatic technology ensure an optimal service life. The sharp silicon carbide easily penetrates high density material surfaces	94
	CS 336 Y	SiC	Y-polyester	●	Special product for calibrating and sanding of chipboard	92
Paint / Varnish / Filler	PS 24 F ACT	SiC	F-paper	●	Close coating, a stable backing with hard silicon carbide grit for painted and coated surfaces in the timber and especially the furniture industry	53, 84
	PS 27 DW	SiC	D-paper	○	Open coating and a special stearate coating prevent premature clogging and loading of the belt. Special product for high quality varnish surfaces, particularly UV varnish	53, 84
	PS 524 E	SiC	E-paper	●	Close coating with hard silicon carbide grain for painted and filled surfaces in the wood and furniture industry	53, 83
	FP 73 W	Aluminium oxide	Film	●	Special product with very tear resistant film backing for the processing of paint, varnish and filler with high service life through additional special coating	56
Plastic	GX 533 JF	SiC	JF-blended cloth	●	Flexible belt with aggressive, hard SiC grit and flexible blended cloth backing for sanding profiles, contours and formed/shaped parts, e.g. fittings	70
Glass	CS 322 X	(Cork)	X-cloth waterproof		Special belt for polishing glass	63
Plastic / Glass	CS 333 X	SiC	X-cloth	●	Abrasive cloth with tear resistant backing for heavy duty and long service life for the processing of glass, ceramics, plastic and scale (dry grinding)	65
	CS 320 Y	SiC	Y-polyester	●	Highly tear resistant special belt for high demands for wet and dry grinding of glass, ceramic and plastic	62, 89
	CS 321 X	SiC	X-cloth	●	Special belt for wet and dry grinding of glass, ceramic and plastic	63, 90

● = close ● = semi-open ○ = open

Belts

Minimum order quantities for made to order items

Width	Minimum order quantities
3–50 mm	30 pieces
51–60 mm	25 pieces
61–75 mm	20 pieces
76–100 mm	15 pieces
101–150 mm	10 pieces
151–300 mm	10 pieces
301–400 mm	30 pieces
401 mm and wider	10 pieces



We reserve the right to over-deliver or under-deliver made to order items.

The minimum length of production belts is 281 mm (cloth and paper backing)

Other sizes and grits available on request.

Short and long belts

Applications guide

Belt joints for long and short belts


Klingspor supplies belts with various types of joints. The type of joint you require depends on the work involved and the machine you are using. The following illustrations show the usual types of joint.

The available types of joints are listed in the product charts on the following pages.

If the product you require is not in stock, we will manufacture it for you subject to a minimum order quantity.




Type 1
Diagonal cut, glued overlapped.




Type 2
Diagonal cut, glued overlapped. Grain tips are completely removed from the overlap to provide for a smoother running belt.




Type 3 G
Zig zag joint, with cloth-reinforced foil backing, impact-free working at very sensitive parts, in particular glass.




Type 4 G
Diagonal cut. Butt joint with cloth-reinforced foil backing. Also suitable for working on unsupported belts, for demanding requirements.




Type 5
Overlapping glued joint. Grit zone is completely ground off. Preferred joint for wood finishes with flat contact elements.



Type 6 G
Diagonal cut, butt joint with cloth-reinforced foil glued on grit side. Grit zone is completely ground off. Use on machines with planar contact elements.



Type 7 G
Sine joint, with cloth-reinforced foil backing, impact-free working at very sensitive parts, for demanding requirements.



The chart alongside contains all the standard types of machines. Please contact us if you cannot find the machine used by you on this list. We will be pleased to assist you further.

Short and long belts

Applications guide



Pad/stroke, edge and profile sanding machines

Manufacturer	Type	Abrasive belt size	
		Width in mm	Length in mm
Bütfering	E-Line 113	370	1900
CMC	KL 150	150	2250
	KL 150 OS	150	2400
	CL 260	120/150	7050
	CL 300	120/150	7850
Fein	GX 75/75 2H, GXC, GI 75/75 2H, GIS 75	75	2000
	GXR	75	2250
	GICS	75	3000
	GIM, GIC	75/150	2000
	GI 100	100	1000
	GI 150/150 2 H, GIL, GIS 150	150	2000
	GIR	150	2250
Flott	TBSM 75	75	1000
	BSM 75, BSM E1, BSM 75 A, BSM 75 A/POL	75	2000
	BSM 150, BSM 150 A, BSM 150 A/pol	150	2000
	KSM 150, KSM 250, KOS 150	150	2250
	KOS 250	250	2250
Greif	S 40	max. 100	3500
	D30 HFS 100	max. 100	2000
	D30 HFS 100/150	100/150	2500
	R 40 HFS 150/200	200	3500
	D 20-2-2	30-50	1250
	D 30-2-2	50-100	2500
	D 40-2-2	50-100	3500
Heesemann	SZ 2	60	2300
	UKP 20	80	2300
	HG-U	220	2000
	FPA 8	130	1900
	KFA, MFA 10	150	5400
	MFA 10	150	7000
	MFA 10	1400	2620/3250
Hema	BA 2-2300	150	8500
	HWS 200	20	1810
	KB 202	20	2040
	BB 315/S+P	25	2220
	BB 315/3+3P	25	3150
	SR 400	25	3320
	SR 500	25	4080
	SR 600/UH 630	25	4500
	TBS 3000	120	1200
	PSM 300	25/50	2360
Hess	Junior, Expert	200	1850
	Gloria	200	1600

Manufacturer	Type	Abrasive belt size	
		Width in mm	Length in mm
Holzmann	MSM 75	75	2000
	DSM 100200B	100	915
	MSM 100 L	100	1220
	MSM 150, KS 2000	150	2000
	BT 1220	150	1220
	KOS 2260	150	2260
	KOS 2510	150	2510
	KOS 2600P, KOS 2600 C	150	2600
	KOS 2740	150	2740
	BS 2000 XL, BS 2400 XL	150	6000
Holzskraft	PB 2400, PBVN 2400, BS 2400, BKS 2400 XL, BSM 2600 P	150	6800
	KOS 3000 P	200	3000
Johannsen	BTS 200	152	1219
	Unilev 150	150	2170
	KSM 801, KSO 150	150	2200
	KSO 81	150	2250
	KSO 1500	150	2280
Kündig	LBSM 2505	150	6400
	LBSM 2505 ESE	150	7000
	LBSM LS 2500	150	7100
	LBSM 3005 ESE	150	8000
	LBSM LS 3000	150	8100
Kühlmeier	KSO 200	200	2200
	T 47	max. 150	2800
	T 48	200	3000
	T 93 Start	150	7400
	T 94 Standard, T 94 Super, T 85, T 95 Profi, T 95 Exclusiv	150	7800
Löser	T 98	150	8200
	Uniq, Basiq, Uniq S	150/200	2000
	ZBS 2, PBM 3	100	9000
	ZBS 3	100	11200
	PBM 4	100	11000
Löser	ZBS 4	100	13200
	GS 2 -6000	300	16300
	GS 2 - 9000	300	22300
	GS 2 - 12000	300	28300
	BKK 1/2, BKK 2	120	2240
	FF 1, UKF 1.1, FF 3.1	120	2300
	UKF 2	120	2500
	KFS	150	2500
	BS 75/-A/-W	100	950
	HSF/HSDSF	100-200	500-5500
Löser	BS 200/-W	200	1500
	BS 300/-W	300	2000

Continuation →

Short and long belts

Applications guide

Portable sanding belt

Manufacturer	Type	Abrasive belt size		Manufacturer	Type	Dimensions in mm
		Width in mm	Length in mm			
Löser	RPS 336, RP+S 377, SP 377, HSRG 377, ZSP 377	150	3500	AEG powertools	HBS 65, HBSE 65	65 × 410
	RP+S 374	150	2500/3500		HBSE 600, HBS 1000 E	75 × 533
	TP 80/TP 80S	30	740		RBSE 75 AE, RBSE 75 S	75 × 533
	KS 100	5–100	3500/4000		HBS 100	100 × 560
	KS 360	5–75	2500		HBSE 100	100 × 560
	KS 350	5–75	3500/4000		BBS 1100	100 × 560
	KS 363	6–50	2500		BBSE 1100	100 × 560
	EB 2	50	2000	Atlas Copco	HBSE 75 S	75 × 533
	EB 3-S	max. 100	3500		HBSE 75	75 × 533
	FS 384/150-G1, SP 337, SP 374, HSD	150	2500		MBSE 705	75 × 533
	SP 352	150	3000		BBS 100	100 × 620
	SP 380, RPS 376	150	3500		BBSE 100	100 × 620
Löwer	KS 225	150	2250	Black & Decker	KA 290, KA 900 E	13 × 451
	KSM 1	150	2580		KA 292	13 × 451
	KSM 2	150	2630		KA 293 E	13 × 451
	SmartGrinder SG 150/300	150/300	3000		KA 83	65 × 410
	LS 200, DSM 1000	200	1600		KA 83 E	65 × 410
	DSM 2000, DSM 2004	200	1800		BS650	65 × 410
	DSM 3000, DSM 3004, HBS 300, HBS 302, LS 300, Multi 300, HBS VR	300	1800		BD 83	65 × 410
	HBS 400/HBS 400u/HBS 4000, Multi 400, HBS 4000 BB	400	1800		BD 83 E	65 × 410
	Combi Queen	500	1800		DN83	65 × 410
					DN83E	65 × 410
Niederberger	P2/P5	50–200	2500		KA 85 EK	75 × 457
	P4	100–420	2500		KA 85, KA 86	75 × 457
	P6	320–420	2500		P 61-03	75 × 508
Quick Wood	Elicoid	40	1780		BD 75	75 × 508
Scheppach	BGS 700	50	686		BD 85	75 × 508
	CSM 405	77	2400		SR 500 E	75 × 508
	BTS 900x	100	915		KA 75, KA 75 E, KA 88, XTA80EK	75 × 533
	ISE 600	150	1500	Bosch	GVS 350 AE	40 × 303
	BSM 2010, KSM 2000	150	2000		PVS 300 AE	40 × 303
	KSM 2500	150	2515		PBS 60	60 × 400
	SLIK 7	150	2740		PBS 60 E	60 × 400
SCM	TecnoMax UNILEV 150	150	2170		GBS 75 AE	75 × 533
	TecnoMax LS	150	7100		PBS 75	75 × 533
Stähle	Saturn E, Saturn Quattro	200	1800		PBS 75 A	75 × 533
	Saturn Duo Comfort	200–320	1800		PBS 75 AE	75 × 533
Vobhag	ERS 25, EFS25, VFS 25	250	2500		PBS 75 E	75 × 533
	VFS 42, DSM 42	420	2500		PBS 7 A, PBS 7 AE	75 × 457
	DSM 46	460	2500		GBS 100 A	100 × 620
	VFS 52	520	2500		GBS 100 AE	100 × 620
	DSM 46/600	600	2500	DeWalt	D26480	64 × 356
Wegoma	KS2250/P	150	2250		MHB158	75 × 480
	KS2400	150	2400		MHB158 E	75 × 480
	KS2600, KS2600FU	200	2600		MHB 157	75 × 480
					MHB 157 E	75 × 480
					DW430, DW431	75 × 533

Continuation →

Short and long belts

Applications guide



Manufacturer	Type	Dimensions in mm
DeWalt	DW 432/ DW 433	75 × 533
	MHB90	100 × 560
	MHB90 E	100 × 560
	MHB90K	100 × 560
	DW650	100 × 560
	DW650E	100 × 560
Einhell	BBS 240, BBS 240/1	50 × 686
	BBS 720, BBS 850 E, BT-B5 850 E	75 × 457
	RT-B5 75, BT - B5 850/1 E	75 × 533
	BBS 1200	100 × 610
Festool	BF1	6/12/16/19 × 520
	BS 75, BS 75E, BS 75E-Set	75 × 533
	BS 105, BS 105E, BS 105E-Set	105 × 620
Fein	RS 12-70 E	20 × 815
	RS 10-70 E	30 × 533
Felisatti	TP 411, BSF 76/900	75 × 533, 76 × 533
	BSF 100/1200E	100 × 610
Flex	LBS 1105 VE	4/9/30 × 520/533
	LBS 1105 VE Set	4/9/30 × 520/533
	LBR 1506 VRA	40 × 618
	LRP 1503 VR	40 × 675
	LRP 1503 VRA	40/20 × 760
Hitachi	SB-75, SB8V2	75 × 533
	9924 DB	75 × 610
	SB 10 T, SB 10 V	100 × 610
	SB 10 V2, SB 10 S2	100 × 610
	SB 110	110 × 620
HOLZ HER	2405	65 × 410
	2406	65 × 410
	2410, 2411, 2420	75 × 533
	2422	105 × 620
	2423	105 × 620
	2424	105 × 620
Kress	CBS 6800 E	65 × 410
Löser	15003	3,6/13 × 305
	14000, 14021, 14021 F	3/6,5/13 × 610/863/1118
	40320	6/12 × 305/457
	11475, 11476, 11476 EL, 11486, 11486 EL	25 × 760
	11477, 11477 EL, 11450, 11450 EL	50 × 760
	14300, 14303	50 × 863
	14306	50 × 1143
	52900	75 × 610

Manufacturer	Type	Dimensions in mm
Makita	9032	9 × 533
	9031	30 × 533
	9910/9911	75 × 457
	9901	75 × 533
	9902/9903	75 × 533
	9900	75 × 533
	9924 DB	75 × 610
	9920	75 × 610
	9402	100 × 610
	9403	100 × 610
Metabo	9404	100 × 610
	9924 DB	100 × 610
	BFE 9-90 SET	6-19 × 457
	12-180 SET	40 × 760
	Ba 0775, BAE 75, Ba E 1075	75 × 533
Milwaukee	Ba E 0876 Signal	75 × 533
	Ba 6100	100 × 620
	HBSE 75 S	75 × 533
Peugeot	BS 100 LE	100 × 620
	PB 600	75 × 457
Ryobi	PAB 75	75 × 533
	B 850 F	75 × 533
	BE-321	75 × 533
	EBS 9576V, EBS 8021 V, EBS 800 V	75 × 533
	B-7075, B-7076, BE-7075	75 × 533
	B-7100	75 × 610
SKIL	B 422, BE 422, BE-1056	100 × 560
	B-7200 A, BE-422, B/BE 424	100 × 610
	BE-4240, EBS 1310 VF HG	100 × 610
	1100, 1200, 1205, 1200 H, 1205 H, 1210, 1210 AA 7600, 7610 AD, 7610 AA, 7620 AA, 7675, 1220 MA, 7630	75 × 457
	5903	75 × 508
Stayer	594 U, 595 U, 7640MA	75 × 533
	7650 AA, 7650 AE, 4640 MA	75 × 533
	1400	100 × 552
	7660 MA	100 × 610/620
Suhner	2 N 75	75 × 457
	LEN 751 E	75 × 533
	LEN 610	100 × 610
	LEN 690	100 × 690
Suhner	UBC 10-R	3/6/12/16/19 × 520
	UBK 6-R	35 × 450
	UTC 7-R	30 × 533
	UTG 9-R	30 × 610

File belts

Coated abrasives

Abrasive cloth

LS 309 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
NF metals	●
Wood	●

Advantages: Universal belt for metalworking and woodworking - Excellent price-performance ratio

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
28 x 533	40	F4G	20	36755
28 x 533	60	F4G	20	37945
28 x 533	80	F4G	20	39236
28 x 533	100	F4G	20	40702
28 x 533	120	F4G	20	41900
28 x 533	150	F4G	20	42794

Abrasive cloth

CS 310 XF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	XF-cotton

Applications:

Stainless steel	●
Metals	●
NF metals	●
Steel	●

Advantages: Universal type for working on radiuses and contours with belt files in all areas of metalworking

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
6 x 610	40	F4G	25	4644
6 x 610	60	F4G	25	4645
6 x 610	80	F4G	25	4646
6 x 610	120	F4G	25	70595
9 x 533	40	F4G	25	286879
9 x 533	60	F4G	25	156968
9 x 533	80	F4G	25	286880
9 x 533	120	F4G	25	286881
10 x 330	40	F4G	25	86104
10 x 330	60	F4G	25	71110
10 x 330	80	F4G	25	71111
10 x 330	100	F4G	25	71112




►► Continuation of CS 310 XF, Abrasive cloth

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
10 x 330	120	F4G	25	71957
12 x 520	40	F4G	25	160139
12 x 520	60	F4G	25	160201
12 x 520	80	F4G	25	159040
12 x 520	120	F4G	25	160140
13 x 450	40	F4G	25	90914
13 x 450	60	F4G	25	75505
13 x 450	80	F4G	25	97081
13 x 450	120	F4G	25	105794
13 x 455	40	F4G	25	72895
13 x 455	60	F4G	25	73099
13 x 455	80	F4G	25	149565
13 x 455	100	F4G	25	73176
13 x 455	120	F4G	25	74086
13 x 610	40	F4G	25	4652
13 x 610	60	F4G	25	4653
13 x 610	80	F4G	25	4654
13 x 610	120	F4G	25	70591
13 x 610	240	F4G	25	99182
20 x 520	40	F4G	25	71959
20 x 520	60	F4G	25	71960
20 x 520	80	F4G	25	71961
20 x 520	120	F4G	25	71963
40 x 303	60	F4G	10	184719
40 x 303	80	F4G	10	188885

Abrasive cloth, waterproof

CS 411 Y



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●
Metals	●

Advantages: Tear-resistant product for use on belt files - Especially high aggressiveness and abrasive performance due to active abrasive substances - Especially for stainless steel, but also for steel and metal in general

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
Width x Length in mm						Grit		Belt joint				Packing unit/pcs.						Cat. number						
9 x 533						40		F4G				25						286886						
9 x 533						60		F4G				25						286887						
9 x 533						80		F4G				25						286888						
10 x 330						40		F4G				25						325250						
10 x 330						60		F4G				25						302797						



File belts

Coated abrasives

► Continuation of CS 411 Y, Abrasive cloth, waterproof

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
10 x 330	80	F4G	25	302798
13 x 610	40	F4G	25	322530
13 x 610	60	F4G	25	302784
13 x 610	80	F4G	25	302785
20 x 520	36	F4G	25	322531
20 x 520	40	F4G	25	322532
20 x 520	60	F4G	25	302791
20 x 520	80	F4G	25	302792

Abrasive cloth

CS 710 XF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	XF-cotton

Applications:

Steel	●
Stainless steel	●
NF metals	●

Advantages: Machine grinding of molded parts and weld seams in trade and industry - Flexible, yet tear-resistant backing - Abrasive belt with hardened and tempered aluminium oxide

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
9 x 533	80	F4G	25	342297
9 x 533	120	F4G	25	342296
10 x 330	80	F4G	25	342302
10 x 330	120	F4G	25	342303
13 x 455	80	F4G	25	342298
13 x 455	120	F4G	25	342299
13 x 610	80	F4G	25	342301
13 x 610	120	F4G	25	342300



Abrasive cloth, waterproof

CS 912 Y ACT



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●

Advantages: Continuously aggressive abrasive performance, with long service life due to ceramic grit - High-performance abrasive belt for steel and stainless steel grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request


Non-woven web file belts see chapter Non-woven web (page 206-207).

Short belts for hand held machines

Coated abrasives

Abrasive cloth

LS 309 XH



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Wood	●
Metals	●
NF metals	●
Paint/Varnish/Filler	●

Advantages: Special type for portable belt sanders - For universal use on wood, metal, paint and varnish - Large product mix of belts for all standard machines

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
60 x 400	60	F5	10	4100
60 x 400	80	F5	10	4104
60 x 400	120	F5	10	4097
65 x 410	40	F5	10	4106
65 x 410	60	F5	10	4114
65 x 410	80	F5	10	4120
65 x 410	100	F5	10	4124
65 x 410	120	F5	10	4128
75 x 457	40	F5	10	37269
75 x 457	60	F5	10	38825
75 x 457	80	F5	10	40345
75 x 457	100	F5	10	41560
75 x 457	120	F5	10	42627
75 x 457	150	F5	10	43020
75 x 480	40	F5	10	4098
75 x 480	60	F5	10	4107
75 x 480	80	F5	10	4115
75 x 480	100	F5	10	4121
75 x 480	120	F5	10	4125
75 x 508	40	F5	10	4099
75 x 508	60	F5	10	4103
75 x 508	80	F5	10	4117
75 x 508	100	F5	10	4118
75 x 533	40	F5	10	4137
75 x 533	60	F5	10	4139
75 x 533	80	F5	10	4140
75 x 533	100	F5	10	4141
75 x 533	120	F5	10	4142
75 x 533	150	F5	10	4143
75 x 533	180	F5	10	4144
75 x 533	240	F5	10	43614
75 x 610	40	F5	10	37285
75 x 610	60	F5	10	38842
75 x 610	80	F5	10	40365
75 x 610	100	F5	10	41576
75 x 610	120	F5	10	42642
100 x 560	40	F5	10	4151



Short belts for hand held machines

Coated abrasives



►► Continuation of LS 309 XH, Abrasive cloth

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
100 x 560	60	F5	10	4473
100 x 560	80	F5	10	4474
100 x 560	100	F5	10	4475
100 x 560	120	F5	10	4476
100 x 560	150	F5	10	4477
100 x 610	40	F5	10	4478
100 x 610	60	F5	10	4480
100 x 610	80	F5	10	4481
100 x 610	100	F5	10	4482
100 x 610	120	F5	10	4483
100 x 610	150	F5	10	4484
100 x 610	180	F5	10	43302
100 x 620	40	F5	10	6272
100 x 620	60	F5	10	6278
100 x 620	80	F5	10	6283
100 x 620	100	F5	10	6284
100 x 620	120	F5	10	6286
100 x 620	150	F5	10	6288
105 x 620	40	F5	10	4485
105 x 620	60	F5	10	4487
105 x 620	80	F5	10	4489
105 x 620	100	F5	10	4490
105 x 620	120	F5	10	4491
105 x 620	150	F5	10	4492
110 x 620	40	F5	10	6290
110 x 620	60	F5	10	6292
110 x 620	80	F5	10	6294
110 x 620	100	F5	10	6295
110 x 620	120	F5	10	6296

Belts with paper backing

Coated abrasives

Abrasive paper

PS 20 F



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	F-paper

Applications:

Metals	●
NF metals	●
Stainless steel	●
Steel	⦿

Advantages: Universal type for finish grinding of steel, stainless steel and other metals - High stock removal rate

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive paper

PS 21 F



Properties

Bonding agent	Resin
Grain	Zirconia alumin./ Al. oxide
Coating	Close
Backing	F-paper

Applications:

Stainless steel	●
Metals	●
Steel	●

Advantages: High aggressiveness and long service life due to self-sharpening zirconia alumina - Specially developed for rough grinding through finish grinding of stainless steel surfaces


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive paper, ANTISTATIC

PS 22 F ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	F-paper

Applications:

Wood	●	Plastic	⦿
Metals	⦿		
NF metals	⦿		
Paint/Varnish/Filler	⦿		

Advantages: High removal rate, fine surface scratch pattern - Specially developed for finish grinding of hardwood - Reduced clogging and longer service life due to ACT recipe and antistatic properties

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request


Belts with paper backing

Coated abrasives



Abrasive paper, ANTISTATIC

PS 524 E



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	E-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●
Wood	⓪

Advantages: Universal belt for hard and tough workpiece surfaces - Fine sanding pattern in the wood and furniture industry - Long service life due to antistatic equipment - Very good price-performance ratio


Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Abrasive paper, ANTISTATIC

PS 24 F ACT



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	F-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●
Wood	⓪

Advantages: For hard and tough surfaces - Finely sanded and varnish surfaces in the wood and furniture industry - Long service life due to ACT recipe and antistatic properties

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Abrasive paper, ANTISTATIC

PS 27 DW



Properties

Bonding agent	Resin
Grain	SiC
Coating	Open
Backing	D-paper

Applications:

Paint/Varnish/Filler	●
Aluminium	●
Plastic	⓪

Advantages: Special product for high-quality varnish surfaces, especially UV finishes - Substantially reduced clogging and longer service life due to additional special coating - Very fine surface scratch pattern

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000


All sizes and minimum purchasing quantities available on request

Belts with paper backing

Coated abrasives

Abrasive paper, ANTISTATIC

PS 28 F



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Open
Backing	F-paper

Applications:

Wood	●
------	---

Advantages: Universal belt for general woodworking, especially softwood - Excellent price-performance ratio


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive paper, ANTISTATIC

PS 29 F ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Open
Backing	F-paper

Applications:

Wood	●
------	---

Advantages: High-quality universal belt for general woodworking, especially softwood - Reduced clogging and longer service life due to ACT recipe and antistatic properties

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
150 x 2000	80	F5	10	307797
150 x 2000	100	F5	10	307798
150 x 2000	120	F5	10	307799
150 x 2170	80	F5	10	307800
150 x 2170	120	F5	10	307801
150 x 2250	60	F5	10	307802
150 x 2250	80	F5	10	307803
150 x 2250	100	F5	10	307804
150 x 2250	120	F5	10	307805
150 x 2250	150	F5	10	307806
150 x 2280	80	F5	10	307807
150 x 2280	100	F5	10	307808
150 x 2280	120	F5	10	307809
150 x 2600	80	F5	10	307811
150 x 2600	100	F5	10	307812
150 x 2600	120	F5	10	307813
150 x 3000	80	F5	10	307814
150 x 3000	100	F5	10	307815



Belts with paper backing

Coated abrasives



►► Continuation of 29 F ACT, Abrasive paper, ANTISTATIC

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
150 x 3000	120	F5	10	307816
150 x 6800	80	F2	10	307821
150 x 6800	100	F2	10	307822
150 x 6800	120	F2	10	307823
150 x 6880	80	F2	10	307824
150 x 6880	100	F2	10	307825
150 x 6880	120	F2	10	307826
150 x 7100	60	F2	10	307828
150 x 7100	80	F2	10	307829
150 x 7100	100	F2	10	307830
150 x 7100	120	F2	10	307831
150 x 7100	150	F2	10	307832
150 x 7200	80	F2	10	307833
150 x 7200	100	F2	10	307834
150 x 7200	120	F2	10	307835
150 x 7500	80	F2	10	307837
150 x 7500	100	F2	10	307838
150 x 7500	120	F2	10	307839
150 x 7800	80	F2	10	307840
150 x 7800	100	F2	10	307841
150 x 7800	120	F2	10	307842
150 x 7800	150	F2	10	307843
200 x 1600	80	F5	10	307844
200 x 1600	100	F5	10	307845
200 x 1600	120	F5	10	307846
200 x 3000	80	F5	10	307847
200 x 3000	100	F5	10	307848
200 x 3000	120	F5	10	307849

Abrasive paper

PS 61 F



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	F-paper

Applications:

Stainless steel	●
Steel	●
Wood	○

Advantages: Continuously aggressive abrasive behaviour due to micro-crystalline and self-sharpening ceramic grit - High-performance abrasive belt for stainless steel finish grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Belts with paper / film backing

Coated abrasives

Abrasive paper, KULEX

PS 529 F

NEW !



Properties

Bonding agent	Resin
Grain	SiC agglom.
Backing	F-paper

Applications:

Stainless steel	●
Steel	●
Glass/Stone	○

Advantages: Long life belt for a brilliant and shiny finish, with low and medium contact pressure - Very long service life, with constant surface roughness - Ideal for dry sanding on wide and long belt machines


Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Abrasive paper, KULEX

PS 729 F



Properties

Bonding agent	Resin
Grain	Al. oxide agglom.
Backing	F-paper

Applications:

Stainless steel	●
Steel	●

Advantages: Long life belt for dry grinding applications - Extremely high service life - Constant surface quality for pre-grinding until finishing - Especially developed for grinding with intermediate contact pressure

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Abrasive film, active coated

FP 73 W



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	Film

Applications:

Paint/Varnish/Filler	●
Plastic	●

Advantages: Special product for processing varnish, plastic and composites - Highly tear-resistant film backing - Abrasive belt with extremely good adaptation, smooth surface and excellent grit adhesion - Substantially reduced clogging and significantly longer service life

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request


Belts with cloth backing

Coated abrasives



Abrasive cloth

CS 308 Y



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
Wood	●
Steel	●
NF metals	●

Plastic	●
---------	---

Advantages: Tear-resistant universal abrasive cloth for metalworking and for hardwood finish grinding - Excellent removal rate under high stress


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth

LS 309 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
NF metals	●
Wood	●

Advantages: Universal belt for metalworking and woodworking - Excellent price-performance ratio

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
50 x 1020	40	F5	10	36837
50 x 1020	60	F5	25	38075
50 x 1020	80	F5	25	39401
50 x 1020	100	F5	25	40832
50 x 1020	120	F5	25	42020
50 x 2000	40	F4G	10	4502
50 x 2000	60	F4G	25	4531
50 x 2000	80	F4G	25	4548
75 x 2000	40	F4G	10	36923
75 x 2000	60	F4G	10	38198
75 x 2000	80	F4G	10	39556
100 x 800	60	F5	10	38286
100 x 800	80	F5	10	39659
100 x 800	120	F5	10	137024
100 x 860	60	F5	10	38895
100 x 860	80	F5	10	40425
100 x 860	100	F5	10	41621
100 x 860	120	F5	10	42678



Belts with cloth backing


Coated abrasives

►► Continuation of LS 309 X, Abrasive cloth

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
100 x 900	60	F5	10	38898
100 x 900	80	F5	10	40428
100 x 900	100	F5	10	41623
100 x 900	120	F5	10	42679
100 x 915	40	F5	10	37324
100 x 915	60	F5	10	38900
100 x 915	80	F5	10	40430
100 x 915	100	F5	10	41625
100 x 915	120	F5	10	42681
100 x 915	150	F5	10	43054
100 x 915	180	F5	10	43308
100 x 915	240	F5	10	128755
100 x 950	40	F5	10	37328
100 x 950	60	F5	10	38904
100 x 950	80	F5	10	40435
100 x 950	100	F5	10	41627
100 x 950	120	F5	10	42684
100 x 1000	40	F5	10	36999
100 x 1000	60	F5	10	38304
100 x 1000	80	F5	10	39679
100 x 1000	100	F5	10	41019
100 x 1000	120	F5	10	42199
150 x 1220	60	F5	10	38428
150 x 1220	80	F5	10	39852
150 x 2000	40	F4G	10	37071
150 x 2000	60	F4G	10	38460
150 x 2000	80	F4G	10	39884

Abrasive cloth

LS 309 J



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	J-cotton

Applications:

Metals	●
NF metals	●
Wood	●

Advantages: Good abrasive performance for working on slight contours on metal and wood

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request


Belts with cloth backing

Coated abrasives



Abrasive cloth

LS 309 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Metals	●
NF metals	●
Wood	●

Advantages: High removal rate in metalworking and woodworking - Very good adaptation to radiuses and contours due to highly flexible cotton backing


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth

CS 310 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Stainless steel	●	Plastic	●
Wood	●		
Steel	●		
NF metals	●		

Advantages: High-quality universal type for metalworking and woodworking - Good removal rate under high stress

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
25 x 1065	60	F4G	10	244635
25 x 1065	80	F4G	10	244634
50 x 1020	40	F5	10	47753
50 x 1020	60	F5	25	48549
50 x 1020	80	F5	25	49300
50 x 2000	40	F4G	10	4587
50 x 2000	60	F4G	25	4590
50 x 2000	80	F4G	25	4591
50 x 2000	120	F4G	25	4593
75 x 2000	36	F4G	10	4594
75 x 2000	40	F4G	10	4595
75 x 2000	60	F4G	25	4596
75 x 2000	80	F4G	25	49399
75 x 2000	120	F4G	25	50652
75 x 2000	180	F4G	25	51222
75 x 2000	240	F4G	25	51470
100 x 920	60	F5	10	48717
100 x 920	80	F5	10	49454



Belts with cloth backing


Coated abrasives

►► Continuation of CS 310 X, Abrasive cloth

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
100 x 920	100	F5	10	50136
150 x 2000	36	F4G	10	47492
150 x 2000	40	F4G	10	47921
150 x 2000	60	F4G	10	48821
150 x 2000	80	F4G	10	49581
150 x 2000	120	F4G	10	50767
200 x 550	40	F7G	10	97832
200 x 550	60	F7G	10	105992
200 x 550	80	F7G	10	123929
200 x 550	120	F7G	10	123931
200 x 750	24	F7G	10	47101
200 x 750	36	F7G	10	47561
200 x 750	40	F7G	10	48028
200 x 750	60	F7G	10	48970
200 x 750	80	F7G	10	49764
200 x 750	100	F7G	10	50340
200 x 750	120	F7G	10	50872

Abrasive cloth ANTISTATIC

CS 311 Y ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Open
Backing	Y-polyester

Applications:

Wood	●
Metals	○

Advantages: Good removal rate for working on wood under high stress - Minimal clogging and long service life due to ACT recipe and antistatic properties

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Belts with cloth backing

Coated abrasives



Abrasive cloth

LS 312 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Stainless steel	●
Metals	●
NF metals	●
Steel	●

Wood	○
------	---

Advantages: Outstanding removal rate and service life due to active abrasive substances - Very good adaptation to radiuses and contours due to highly flexible cotton backing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
300 x 3500	100	F1	10	79849
300 x 3500	150	F1	10	247873
300 x 3500	280	F1	10	79850
300 x 3500	320	F1	10	83657
300 x 3500	400	F1	10	81147

Abrasive cloth, multibond

LS 313 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Stainless steel	●
Aluminium	●
NF metals	○

Advantages: Top product for working on temperature-sensitive molded parts - Very good adaptation to radiuses and contours due to highly flexible cotton backing - Cool grinding due to additional multibond

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------


All sizes and minimum purchasing quantities available on request

Belts with cloth backing

Coated abrasives

Abrasive cloth

LS 314 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Metals	●
Plastic	●
NF metals	●
Aluminium	●

Advantages: Specialized product with stearate coating to reduce clogging during work on lightly and heavily profiled parts made of brass, aluminum and composite materials (plastic/stainless steel or wood/stainless steel)

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth ANTISTATIC, SUPERFLEX

LS 318 JF ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Open
Backing	JF-cotton

Applications:

Wood	●
------	---

Advantages: Top product for working on profiles and contours, especially in woodworking - Outstanding adaptation, also to tight radiuses, due to highly flexible cotton backing - Reduced clogging and long service life due to the ACT recipe

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth, waterproof

CS 320 Y



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	Y-polyester

Applications:

Glass/Stone	●
Mineral based materials	●
Plastic	●

Advantages: Outstanding abrasive performance on hard and difficult-to-machine materials - Ideal for high stress - Can be used wet or dry

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request


Belts with cloth backing

Coated abrasives



Abrasive cloth, waterproof

CS 321 X



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	X-cotton

Applications:

Glass/Stone	●
Mineral based materials	●
Plastic	●

Advantages: Outstanding abrasive performance on hard and difficult-to-machine materials - Ideal for wet grinding, but also suitable for dry grinding


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth, waterproof

CS 322 X



Properties

Bonding agent	Resin
Grain	Cork
Backing	X-cotton

Applications:


Glass/Stone	●
-------------	---

Advantages: Special product for polishing glass with high quality cork/resin coating - Long life with consistent polishing effect - Waterproof

All sizes and minimum purchasing quantities available on request

Abrasive cloth, KULEX

CS 325 Y



Properties

Bonding agent	Resin
Grain	SiC agglom.
Backing	Y-polyester

Applications:

Stainless steel	●
Glass/Stone	●
Metals	●

Advantages: Long-life abrasive belt for a brilliant, glossy finish, under medium to high grinding pressure - Extremely long life, with consistent surface roughness and finish - Suitable for dry and wet grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------


All sizes and minimum purchasing quantities available on request

Belts with cloth backing

Coated abrasives

Abrasive cloth, KULEX

CS 326 Y



Properties

Bonding agent	Resin
Grain	Al. oxide agglom.
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●

Advantages: Long-life abrasive belt for a satin surface scratch pattern, under medium to high grinding pressure - Extremely long life, with consistent surface roughness and finish - Suitable for wet grinding


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
150 x 2500	80	F4G	10	316029
150 x 2500	120	F4G	10	316030
150 x 2500	180	F4G	10	316031
150 x 2500	240	F4G	10	316032
150 x 2500	320	F4G	10	316033
150 x 2500	400	F4G	10	316034
150 x 2500	600	F4G	10	351663

Abrasive cloth, KULEX

CS 329 Y



Properties

Bonding agent	Resin
Grain	Al. oxide agglom.
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●

Advantages: Long-life abrasive belt for a satin surface scratch pattern, under low to medium grinding pressure - Especially suitable for dry grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request


Belts with cloth backing

Coated abrasives



Abrasive cloth, waterproof

CS 330 X



Properties

Bonding agent	Resin
Grain	SiC/Cork
Coating	Close
Backing	X-cotton

Applications:

Stainless steel	●
Steel	●

Advantages: Soft, very fine grinding with low surface roughness, polishable - Special belt for satin final finishing of stainless steel and steel surfaces with cork granulate with SiC/resin coating


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth

CS 333 X



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	X-cotton

Applications:

Glass/Stone	●
Plastic	●
Metals	●

Advantages: Ideal for dry grinding of very hard or difficult-to-machine materials (castings, scales, ceramic, rubber, plastic)


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth

CS 333 XF



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	XF-cotton

Applications:

Metals	●
NF metals	●
Plastic	●

Advantages: Long service life and high abrasive performance - Top product for robot grinding of brass fittings - Optimal combination of flexibility and tear resistance

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------


All sizes and minimum purchasing quantities available on request

Belts with cloth backing

Coated abrasives

Abrasive cloth

CS 333 JF



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	JF-cotton

Applications:

NF metals	●
Metals	●
Plastic	●

Advantages: Long service life and high abrasive performance - Very good adaptation to radiuses and contours due to highly flexible cotton backing - Ideal for hand grinding of brass fittings and other molded parts


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth, waterproof

CS 341 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
Stainless steel	●
Steel	●
NF metals	●

Advantages: High-quality universal type for wet grinding - Good service life and fine finish - Especially for rough through fine grinding in centreless and surface grinding applications


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth, multibond

CS 409 Y



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
NF metals	●

Advantages: Aggressive abrasive behaviour - Cool grinding and increased grinding performance on stainless steel and high-alloy steels due to additional multibond - Very long service life also when used for grinding of non-ferrous metals

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request


Belts with cloth backing

Coated abrasives



Abrasive cloth, multibond

CS 410 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Stainless steel	●
NF metals	○

Advantages: Cool grinding and no heat tinting due to additional multibond - Increased abrasive performance for use on stainless steel


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
50 x 450	60	F4G	25	53108
50 x 450	80	F4G	25	53267
50 x 450	120	F4G	25	53538

Abrasive cloth

CS 411 X



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	X-cotton

Applications:

Stainless steel	●
Steel	●
Metals	●

Advantages: High aggressiveness and abrasive performance in rough grinding of steel and stainless steel - Very versatile in all areas of metalworking

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
50 x 2000	36	F4G	10	26419
50 x 2000	40	F4G	10	26593
50 x 2000	60	F4G	25	72251
50 x 2000	80	F4G	25	26943
50 x 2000	120	F4G	25	103997
75 x 2000	24	F4G	10	4618
75 x 2000	36	F4G	10	4619
75 x 2000	40	F4G	10	4620
75 x 2000	60	F4G	10	4622
75 x 2000	80	F4G	10	26969
75 x 2000	120	F4G	10	113664
100 x 2000	36	F4G	10	26463
150 x 2000	36	F4G	10	26488



Belts with cloth backing


Coated abrasives

►► Continuation of CS 411 X, Abrasive cloth

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
150 x 2000	40	F4G	10	26668
150 x 2000	60	F4G	10	72775
150 x 2000	80	F4G	10	27030
150 x 2000	120	F4G	10	101308

Abrasive cloth, waterproof

CS 411 Y



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●
Metals	●

Advantages: Tear-resistant high-performance belt - Especially high aggressiveness and abrasive performance due to active abrasive substances - Especially for stainless steel, but also for steel and metal in general

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
75 x 2000	24	F4G	10	62056
75 x 2000	36	F4G	10	62150
75 x 2000	40	F4G	10	62509
75 x 2000	50	F4G	10	62604
75 x 2000	60	F4G	10	62938
75 x 2000	80	F4G	10	63068
75 x 2000	120	F4G	10	20598
150 x 2000	36	F4G	10	62176
150 x 2000	40	F4G	10	62537
150 x 2000	60	F4G	10	62971
150 x 2000	80	F4G	10	63102
150 x 2000	120	F4G	10	278219


Belts with cloth backing

Coated abrasives



Abrasive cloth, waterproof

CS 412 Y



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	Y-polyester

Applications:

Metals	●
NF metals	●
Stainless steel	●
Steel	●

Wood	●
------	---

Advantages: High-quality universal type for wet and dry grinding of stainless steel, steel and other metal surfaces


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth, waterproof

CS 416 Y



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Semi-open
Backing	Y-polyester

Applications:

Stainless steel	●
Plastic	●
NF metals	●

Advantages: Very high aggressiveness and abrasive performance - Long service life also when used on materials that cause clogging

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
75 x 2000	36	F4G	10	204858
75 x 2000	40	F4G	10	205377
75 x 2000	60	F4G	10	207651
75 x 2000	80	F4G	10	220805
150 x 2000	36	F4G	10	231336
150 x 2000	40	F4G	10	205474
150 x 2000	60	F4G	10	204213
150 x 2000	80	F4G	10	205130

Belts with cloth backing

Coated abrasives

Abrasive cloth, NOPPEX

CS 420 Y



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●

Advantages: Long-life abrasive belt with knob structure for a satin surface scratch pattern, under high to medium grinding pressure - Very suitable for centreless circular and surface grinding - Suitable for dry and wet grinding


Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Abrasive cloth

GX 533 JF



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	JF-blended cloth

Applications:

NF metals	●	Mineral based materials	●
Plastic	●		
Metals	●		
Titanium/Alloy	●		

Advantages: Special product for use on brass (sanitary fittings) and titanium (surgical instruments) - Good adaptation to radiuses and contours - High process reliability in robot applications or working with unsupported belts due to highly tear resistant blended fabric backing

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Abrasive cloth, multibond

CS 631 XF



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Semi-open
Backing	XF-cotton

Applications:

Stainless steel	●
Titanium/Alloy	●

Advantages: Continuously aggressive abrasive performance, with long service life due to ceramic grit - Good adaptation to radiuses and contours - Prevents heat tinting on stainless steel due to multibond

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Belts with cloth backing

Coated abrasives



Abrasive cloth

CS 710 XF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	XF-cotton

Applications:

Steel	●
Stainless steel	●
NF metals	●

Advantages: Machine grinding of surfaces or molded parts in trade and industry - Flexible, yet tear-resistant backing - Abrasive belt with hardened and tempered aluminium oxide


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth

GX 712 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-blended cloth

Applications:

NF metals	●
Stainless steel	●
Steel	●
Metals	●

Advantages: Active abrasive substances ensure outstanding abrasive performance - Special product for tough/hard and heat-sensitive materials - Good adaptation to radiuses and contours - High process reliability in robot applications or working with unsupported belts due to highly tear resistant blended fabric backing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Belts with cloth backing

Coated abrasives

Abrasive cloth, waterproof

CS 811 Y ACT



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	Y-polyester

Applications:

Die-cast aluminium	●
Stainless steel	●
Steel	●

Advantages: High aggressiveness and abrasive performance - Developed for applications under high stress - Especially good grain adhesion and service life due to ACT recipe

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth, multibond

CS 910 Y ACT



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
Titanium/Alloy	●

Advantages: Continuously aggressive abrasive performance, with long service life due to ceramic grit - High-performance abrasive belt for stainless steel finish grinding - Prevents heat tinting on stainless steel - No clogging/glazing when used on titanium and high-alloy steels

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth, waterproof

CS 912 Y ACT



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●

Advantages: Continuously aggressive abrasive performance, with long service life due to ceramic grit - High-performance abrasive belt for stainless steel finish grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Belts with cloth backing

Coated abrasives



Abrasive cloth, multibond

CS 931 JF



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Semi-open
Backing	JF-cotton

Applications:

Stainless steel	●
Titanium/Alloy	●

Advantages: Special product with high flexible backing for the processing of stainless steel and high-alloyed steel - Continuously aggressive grinding properties with high lifetime due to semiopen coated self-sharpening ceramic grain - Very good adaptability to radiuses and edges through high flexible backing - The additional multibond provides a "cool grinding" in the processing of stainless steel and thus tempering colours are avoided


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth, multibond

GX 931 JF



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Semi-open
Backing	JF-blended cloth

Applications:

Stainless steel	●
Titanium/Alloy	●

Advantages: Special product with flexible and tear resistant backing for the processing of stainless steel and high-alloyed steel - Continuously aggressive grinding properties with high lifetime due to semi-open coated self-sharpening ceramic grain - Good adaptability on radiuses and edges through flexible backing - High process reliability in robot applications or grinding slack of the belt because of extremely tear resistant polycotton backing - The additional multibond provides a cool grinding in the processing of stainless steel and avoids tempering colours

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------


All sizes and minimum purchasing quantities available on request

Abrasive sleeves

Coated abrasives

Abrasive cloth

CS 310 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
Plastic	○

Advantages: Tear-resistant cloth with reinforced backing - Spiral shaped joint, cylindrical form - Universal applications in metalworking - High aggressiveness when used with rubber drum GK 555

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Height in mm	Grit	Packing unit/pcs.	Cat. number
10 x 20	80	50	11555
10 x 20	150	50	11554
13 x 25	50	50	28188
13 x 25	80	50	11558
15 x 30	50	50	11568
15 x 30	80	50	11567
15 x 30	150	50	11566
22 x 20	50	50	11571
22 x 20	80	50	11570
22 x 20	150	50	11569
30 x 20	50	50	11574
30 x 20	80	50	11573
30 x 30	50	50	11577
30 x 30	80	50	11576
30 x 30	150	50	11575
45 x 30	50	50	11580
45 x 30	80	50	11579
45 x 30	150	50	11578
60 x 30	50	25	11583
60 x 30	80	25	11582
60 x 30	150	25	11581
75 x 30	50	25	11586
75 x 30	80	25	11585


Abrasive sleeves

Coated abrasives



Abrasive cloth

CS 310 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
Plastic	○

Advantages: Tear-resistant cloth with reinforced backing - Spiral shaped joint, conical form - Universal applications in metalworking - High aggressiveness when used with rubber drum GK 555 A


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter 1 x Diameter 2 x Height in mm	Grit	Packing unit/pcs.	Cat. number
22 x 29 x 30	50	50	11592
22 x 29 x 30	80	50	11591
22 x 36 x 60	50	50	11595
22 x 36 x 60	80	50	11594
22 x 36 x 60	150	50	11593

Abrasive cloth, multibond

CS 451 X



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	X-cotton

Applications:

Stainless steel	●
-----------------	---

Advantages: Tear-resistant cloth with reinforced backing - Spiral shaped joint, cylindrical form - High-quality zirconia alumina with multibond especially suited for working on stainless steel - High aggressiveness when used with rubber drum GK 555

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Height in mm	Grit	Packing unit/pcs.	Cat. number
30 x 20	40	50	334246
30 x 20	60	50	255475
45 x 30	40	50	334247
45 x 30	60	50	255476
60 x 30	40	25	334248
60 x 30	60	25	255626

Rubber drums

Rubber drums

GK 555



Advantages: Reusable rubber drum for cylindrical abrasive sleeves CS 310 X and CS 451 X - Mounting and dismounting by a light turn

Diameter x Width x Shaft in mm	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
10 x 20 x 6	30 m/s	44000 rpm	1	14843
13 x 25 x 6	30 m/s	44000 rpm	1	14845
15 x 30 x 6	30 m/s	36000 rpm	1	14847
22 x 20 x 6	30 m/s	26000 rpm	1	14848
30 x 20 x 6	30 m/s	19100 rpm	1	14849
30 x 30 x 6	30 m/s	19100 rpm	1	14850
45 x 30 x 6	30 m/s	12700 rpm	1	14851
60 x 30 x 6	30 m/s	9500 rpm	1	14852
75 x 30 x 8	30 m/s	7600 rpm	1	14853

Rubber drums

GK 555 A



Advantages: Reusable rubber drum for cone-shaped abrasive sleeves CS 310 X - Mounting and dismounting by a light turn

Diameter 1 x Diameter 2 x Height x Shaft in mm	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
22 x 29 x 30 x 6	30 m/s	19100 rpm	1	14855
22 x 36 x 60 x 6	30 m/s	15900 rpm	1	14856

Notes



Belts


Belt joints for wide belts

Klingspor supplies belts with various types of joint. The type of joint you require depends on the work involved and the machine you are using.


The following illustrations show the usual types of joints. The available types of joints are listed in the product charts on the following pages.

The chart alongside contains all the standard types of machines for wide belts. Please contact us if you cannot find the machine used by you on this list. We will be pleased to assist you further.


If the product you require is not in stock, we will manufacture it for you subject to a minimum order quantity.

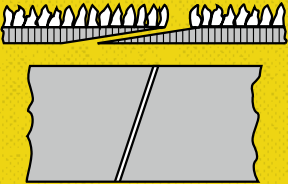


Form 1
Overlapping glued joint. Standard joint for wide belts with paper backing.

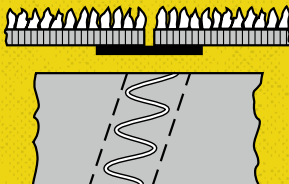


Form 3G
Zig zag joint, with foil backing for finishing surfaces that must be of the highest quality using wide belts with cloth backing.

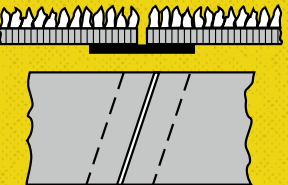

Form 4G
Butt joint with cloth-reinforced foil backing. Standard joint for wide belts with cloth backing. High tear resistance.

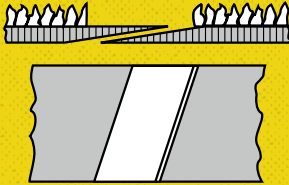

Form 5
Overlapping glued joint. Grit zone is completely ground off. For applications with flat contact elements, allows a gentle transition in the belt connection area.

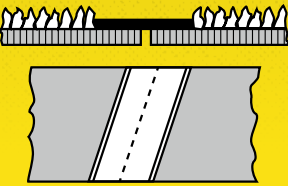

Form 6G
Butt joint with cloth-reinforced foil glued on grit side. Grit zone is completely ground off. Use in the timber products industry.

Wide belts

Applications guide



Wide belt machines

Manufacturer	Type	Abrasive belt size	
		Width in mm	Length in mm
Anthon	Saphir Combi 1100/1300, Saphir WS 1100/1300, Saphir WWS 1100/1300, Saphir 110/130, Saphir L, Saphir L-series	1120/1320	1900
	CMOWKS	900/1100/1300	2500
Biesse	Levia 95	970	1900
	Levia 110	1120	2150
	Levia 110R	1115	2620
	Levia 135, Levia 135R 2, Levia 135R 3	1370	2150
	Levia 210, Levia 220	970	1900
	Levia 310, Levia 320, Levia 330	1120/1370	2150
	Regal 135 2, Regal 135 3, Regal 520, Regal 530	1370	2620
	Regal 320, Regal 330	1120/1370	2620
Boere	B, Kombi, Sandonomic C, Sandonomic KC	610/810/910/1010/1110/1310	1900
	Elite B	610/910/1100/1310	1900
	Elite B/T	610/910	1900
	Elite B/T	1110/1310/1660	2620
	Elite-LAC K, Elite-LAC KK	1100/1300	2620
	Elite-T	610/910/1110/1310	1900
	Elite TP	910/1110/1310	1900
	Merite C, Merite KC	1010	1900
	MT C, MT KS/KK, MT KKS/KKK	410/610/940	1525
	Sandrite C, Sandrite KC	1110/1310	1900
Bütfering	Select C, Select K, Select KC, Select KK, Select KS, Select KKC, Select KKK, Select KKS, Select CB, Select KSB	910/1110/1310	1900
	Select +plus+	1370	2620
	AF 2, AF 3	1110/1360	2620
	AL-E	1360	2620
	AWS 2, AWS 3, AWS Combi	1110/1360	1900
	Optimat SBC 111/113/Classic, Optimat SBC 211/312/Classic, Optimat SBC 311/313/Classic	1120/1370	1900
	Optimat SBC 213/QC/Classic, Optimat SBC 313/QCE/Classic, Optimat SBC 313/RQE/Classic	1370	1900/2620
	E-Line 111, E-Line 211, E-Line 311	1120	1900
	E-Line 113, E-Line 213, E-Line 313	1370	1900
	ECO 1100, ECO 2 K, ECO 2 KC, ECO 2 KK, ECO 2 C-E, ECO 2 K-E	1120	1900
	PRO 111, PRO 211	1120	1900
	SBO 109	970	1900
	SCO 213 CC, SCO 213 CH, SCO 213 QC, SCO 213 QH	1370	2620
	SGO 109 K	970	1900
	SGO 211 K, SGO 211 RK, SGO 211 MK, SGO 311 RKK	1120	1900
	SKO 111 C	1120	1900
	SKO 113 C, SKO 213 RC, SKO 213 CC	1370	1900
	STO 111 L, STO 211 RL	1120	1900
	STO 113 L, STO 213 RL, STO 313 RRL	1370	1900
	Super 109 L, Super 209 RL	970	1900
	Super 111 L, Super 211 RL	1120	1900
	Super 113 L, Super 213 RL	1370	1900
Manufacturer	Type	Abrasive belt size	
		Width in mm	Length in mm
Büftering	Super RRF/RRL 311/313, Super RLF 311/313, Super MRL 311/313	1120/1370	1900
	SWO 313 RRF	1370	2620
	SWT 113 K	970	1900
	SWT 142 RK, SWT 124 MK, SWT 124 RC, SWT 134 RCC, SWT 134 RRK	1120	1900
	SWT 315 C, SWT 325 RL, SWT 325 RC, SWT 325 RH, SWT 325 CC, SWT ww 325 CH, SWT 325 QC, SWT 335 RQE, SWT 335 RQH, SWT 335 QCE, SWT 335 RRL, SWT 335 RRC	1370	2620
Casadei	SWT 515 C	1370	2150
	SWT 525 CC, SWT 525 CH, SWT 525 QC, SWT 525 QH, SWT 535 RQE, SWT 535 RQH, SWT 535 QCE, SWT 535 QCH	1370	2620
	SWT 700	1350/1650	2620/3250
	SWT 900	1350/1650/2200	2620/3250
	Vega 111, Vega 211 C-E, Vega 311	1120	2150
CMC	Vega 113, Vega 213 C-E, Vega 313	1370	2150
	Libra 1 (TC 95, RR 95, RT 95, RTC 95)	970	2200
	Libra 2 (TC 110, RR 110, RT 110, RTC 110)	1120	2200
	Libra 3 (110 RRT, 110 RRR, 110 RRTC)	1120	2200
	Libra 4/2 (RR 135, RT 135, RTC 135, TCTC 135, TCT 135, TT 135)	1380	2620
Costa	Libra 4/3 (RRR 135, RRT 135, RTCTC 135, RRTC 135, RIT 135, RTCT 135)	1380	2620
	Libra 6 (RT 115, RR 115, RT 135, RR 135)	1180/1380	2620
	Libra 10	970	1525
	Libra 30 (RTC 95, TC 110, RTC 110)	970/1115	1900
	Libra 40, Libra 40/3 (RR110, RTC 110, RRR 110, RRTC 110, TC 135, RR 135, RTC 135, RRR 135, RRTC 135)	1115/1370	2200
Costa	Libra 50 (RR 135, RTC 135, RRR 135, RRTC 135)	1370	2620
	Libra 60 (RR135, RTC 135, RRR 135, RRTC 135)	1370	2620
	LEV 95 RT/RR/R+T	970	1900
	LEV 115 RT/RR/R+T	1180	1900
	A, A1, AK, AF, AKF, AW1	1180/1380	2620
Costa	K, KA, KB, KH, KK, KP, KBA, KBH, KHV, KKA, KKH, KKP, KPH	1350/1650	2620/3250
	Elite CK, C/400, CT, CC, C/CK, CK/T	1150/1350	2620
	S, SA, SP	1150/1350	2620
	S4	1380/1680	4600
	SN	1380/1680	2620/3250
Costa	SH	1380	2620/3250
	SK (Serie 4)	1150	2200
	SK (Serie 5, Serie 6)	1380	2620
	K (Serie 7)	350 – 1650	2620/3250
	K (Serie 8)	1350 – 2200	2620/3250
Costa	K (Serie 9)	1650 – 3000	3250/4600

Wide belts

Applications guide

Wide belt machines

Manufacturer	Type	Abrasive belt size	
		Width in mm	Length in mm
DMC	Chronosand	1115/1315	2620
	Eurosand L	1115/1370	2620
	Mastersand 110, Mastersand 135	1115/1370	2620
	Polisand	1130/1330	2200/2620
	System 1350 RK	1370	2620
	System T2 1350, System T3 1350, System T5 1350, System T7 1350	1370	2620
	System BT44 1350	1370	2620
	System BT22 2200	2220	2620
	System T10	1370	2620
	Technosand K	1115/1370	2620
	Technosand L	1115	2620
	Topsand 2000	1370/1670/1920/2270	3250
	Unisand 2000	1370	2620
EMC	Explorer	670/970/1120	1900
	Explorer Super	670/970/1120	2200
	Giant	1370	2620
	Under-Top	1120	1900
	Venus	1120/1370	2200
	Venus Super	1120/1370	2620
Ernst	820 (SIMPLEX, DUPLEX, KOMBI)	1400	2150
	Economic 520 (SIMPLEX, DUPLEX)	1400	2620
	LKKB(B)/K, LKB(B)/K, KBB/K	1400	2620/3150
	EG 3 M/1400	1400	1540
	EM 5N 900	900	1540
	EM 3N 1400, EGM 3M 1400	1400	1690
Felder	510, 530, 810, 830, 850	1400	2620
	FW 650	670	1900
	FW 950 classic	970	1700
	FW 952	970	1900
	FW 1100, FW 1102	1110	1900
Format 4 (Felder Group)	finish 1102, finish 1302	1110/1310	2200
Griggio	Giant 1350	1350	4550
	GC65, GC95, GC110	670/970/1120	2150
Heesemann	GI 1000 RR/RRT, GI 1300 RR/RRT	1120/1370	2620
	MFA 10	1400	2620/3250
	EH 31.11	1120	1900
	EH 51.11, EH 52.11	1120	2150
	EH 51.13, 52.13	1370	2150
	FBA 8	700/1400	2620
	KSA 4	1350	3250
	KSA 8	1650/2050/2350/2650	2620/3250
	LSM 4-U, LSM 8	1350	2620/3250
	LSM 6, KSM 8	1350	2620
	LAZ 2	1400	2100
	MFA 6, MFA 6 Impression, MFA 8, MFA Impression	1400	2150/2620
Holzkraft	BBS 430 C	450	1600
	BBS 630 C	650	1600
	BSH 650 HP	650	1900
	BSM 1100 RP	1100	1900
80			

Manufacturer	Type	Abrasive belt size	
		Width in mm	Length in mm
Holzmann	SPB 300R, SPB 300C, SPB 300RR, SPB 300RC	320	1900
	SPB 400R, SPB 400C, SPB 400RR, SPB 400RC	420	1900
	SPB 430R, SPB 430C	450	1600
	SPB 630R, SPB 630C	650	1600
	SPB 630R, SPB 630 RR, SPB 630RC	650	1900/2200
	SPB 910R, SPB 910C, SPB 910RC, SPB 910RR	930	1900/2200
	RP 950B	980	1900
	RRP 650 B	680	1900
	RRP 1000B	1030	2200
Johannsen	Aerostat	1130/1330	2200
	Aerostat I 1K	1050/1130/1350	1900
	Aerostat I 2 RS	1050/1130	1900
	Aerostat II 2 RS, Aerostat II 2 RK, Aerostat 2 KS, Aerostat 2 KK	1130/1350	1900
	Compact 1K	1050	1900
	Compact 2 RS, Compact 2 RK	1050/1130	1900
Kündig/ Enorm	MT 2/1100	1150	1900
	Primo, Triplex, Magiq, Topiq	1120/1350	2000
	Enorm DUO 1100	1120	1900
	Duplex	670/1120/1350/1620	2000
	Premium, Brilliant, Technic	420/670/1120/1350/1620/1920/2220	2000
OTT	Alpha, Alphontronic	1120/1380	2150
	Comet 1	1120/1380	1900
	Comet 2, Comet 3	1100/1360	1900
	Delta	1400	2150
	Deltatronic	1120/1380	2150
	Euro	1120/1380	1900
	Euro 95 WS	970	1900
	Lambda, Lambda KSE 2	1360	2620
	Megatronc	1120/1380	1900
	Omega, Omegatronc	1120/1380	2150
Sanding-master / Timesavers	RSK-O	1120	1900
	CSB-400	430	1600
	CSB-600, CSB-900, SCSB-1100, SCSB-1300	630/930/1130/1330	1900
	CSB-1600, CSB-1950	1630/1980	2620
	CSB 2-600, CSB 2-900, SCSB 2-1100, SCSB 2-1300	630/930/1130/1330	1900
	CSB 2-1050, CSB 2-1300, CSB 2-1600, CSB 2-1950	1080/1330/1630/1980	2620
	CSB 3-600, CSB 3-900, SCSB 3-1100, SCSB 3-1300	630/930/1130/1330	1900
	CSB 3-1050, CSB 3-1300, CSB 3-1600, CSB 3-1950	1080/1330/1630/1980	2620
	KCSB-U	930/1130/1330	1900
	SA 2100 W, SA 2100 C, SA 2100 K	600/900/1100/1350	1900
	SA 2200 WW, SA 2200 WS, SA 2200 WC	600/900/1100/1350	1900
	SA 2200 WK, SA 2200 WG	1100/1350	1900
	SA 2200 KG	1100	1900
	SA 2300 WWW, SA 2300 WWS	600/900/1100	1900
	SA 3100 W, SA 3100 C, SA 3100 K	900/1100/1350	1900

Wide belts

Applications guide



Wide belt machines

Manufacturer	Type	Abrasive belt size	
		Width in mm	Length in mm
Sanding-master / Timesavers	SA 3100 W, SA 3100 C, SA 3100 K	900/1100/1350	1900
	SA 3200 WW, SA 3200 WS, SA 3200 WC, SA 3200 PW, SA 3200 PC, SA 3200 WK, SA 3200 WG, SA 3200 KG	900/1100/1350	1900
	SA 3300 WWW, SA 3300 WWS, SA 3300 WWC, SA 3300 PWS, SA 3300 PWC, SA 3300 WWK, SA 3300 WWG	900/1100/1350	1900
	SA 3400 WWWW, SA 3400 WWWS, SA 3400 WWWC	900/1100/1350	1900
	SA 4100 W	1100/1350	2620
	SA 4200 WW, SA 4200 WS, SA 4200 PW, SA 4200 WG, SA 4200 DW	1100/1350	2620
	SA 4300 WWW, SA 4300 WWS, SA 4300 PWS, SA 4300 WWG, SA 4300 DWG, SA 4300 DKG	1100/1350	2620
	SA 4400 WWWW, SA 4400 WWWS, SA 4400 WWKG	1100/1350	2620
	SCSB	630/930/1130/1330	1900
	SCSB2	630/930/1130/1330	1900
	SCSB3	630/930/1130/1330	1900
	Timesavers-Grindingmaster 2000 Serie	600/900/1100/1350	1900
	Timesavers-Grindingmaster 2100 Serie	600/900/1100/1350	1900
	Timesavers-Grindingmaster 2200 Serie	900/1100	1900
	Timesavers-Grindingmaster 2200 Serie	1300	2620
	Timesavers-Grindingmaster 3100 Serie	600/900	1525
	Timesavers-Sandingmaster 3300 Serie	900/1100/1350	1900/2150/2620
	Timesavers-Grindingmaster 4100 Serie	600/900/1350	1900
	Timesavers-Grindingmaster 4200 Serie	600/900/1350	1900
	Speedsander	930	1525
	137-1HDMW	940	1525
	137-1HD60	940	1525
	137-1HPM	940	1905
	143-1HD60	1090	1525
	CL 63TS, CL 110, CL 130	640/1115/1315	2150
	Sandya CL 110M	1115	2150
	CS92, CS110, CS130	930/1115/1315	2300
	Sandya Uno (CC, CS, CCS, RR, RCS)	930	1525
	Sandya 1K, Sandya 1S	970	1525
	Sandya 3	970	1900
	Sandya 3 S, Sandya 300	970/1115	1900
Sanding-master / Timesavers	Sandya 5	1115	1900
	Sandya 5 S, Sandya 600, Sandya 7S	1115/1370	2150
	Sandya 10/2, Sandya 10/3	1115/1320	2150
	Sandya 10S, Sandya 15S, Sandya 16S	1115/1370	2620
	Sandya 20, Sandya 9S	1115/1370	2620
	Sandya 30 CS	1315	2300
	Sandya 30 CLK, Sandya 7	1115	2150
	Sandya 30 CL	1315	2150
	Sandya 30/2, Sandya 30/3	930/1115/1315	2620
	Sandya 40	1370	2620
	Sandya 50	1115/1315	1900
	Sandya 60	1115	2620
	Sandya L90	915	2150
	Sandya 90 CLX4G, Sandya 30 RRT130	1315	2620
	Sandya Win	640	1525
	EuroSander 1350	1350 – 1400	2620/3250
	EuroSander 1700	1650 – 1730	2620/3250
	TAG	1400	2620/3250
	TAG E	1400	2620
	TAG EU	1400	2620/3250
	TAG L	430/630/830	2620
	Challenge 111/113, Challenge 211/213, Challenge 221/223, Challenge 321/323, Challenge 331/333	1130/1380	2620
	Challenge 111AK, Challenge 211A, Challenge 211AK, Challenge 221AK, Challenge 221A	1130	2200
	Challenge 221B/223B	1130/1380	2620
	Rita 3/CC, Rita 4/CC	1400	3250
	S1, S2	1130/1380	2200/2620
	S3	1130/1380/1630	2620
	S4	1380	3250
	S211, S219	1000	1900
	Valeria 1, 2, 3	1400	3250
	KSF	1120/1370/1620	2150/2620
	KSV	1120/1370/1620/1920/2270	2620
	KSL	1370/1620	2620
	OFZ-K1(o), -K2(o), -K3(o)	950/1150/1400	2050/2500
	OFZ KS/Q	1400	2500
	Weber 600	1120/1370	1900
	Weber 1000	1120/1370	2150
	LCS	1100/1300	1900
	LCE compact	1100/1350	1900
	TT, MKS	600/1100/1350/1600	2150
	MK	920/1120/1370/1620/2020	2620
	KLE	1400	2620

Wide belts with paper backing

Coated abrasives

Abrasive paper

PS 20 F



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	F-paper

Applications:

Stainless steel	●
Metals	●
NF metals	●
Steel	●

Advantages: Universal product for stainless steel finish grinding - High cutting rate



Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Abrasive paper

PS 21 F



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	F-paper

Applications:

Stainless steel	●
Metals	●
Steel	●

Advantages: Aggressive abrasive behaviour due to self-sharpening zirconia alumina - Optimal recipe for rough grinding and finish grinding of stainless steel



Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Wide belts with paper backing

Coated abrasives



Abrasive paper, ANTISTATIC

PS 22 F ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	F-paper

Applications:

Wood	●	Plastic	○
Metals	○		
NF metals	○		
Paint/Varnish/Filler	○		

Advantages: High removal rate, fine surface scratch pattern, especially suitable for hardwood, HPL panels and melamine and primer foil coatings - Reduced clogging and longer service life due to ACT recipe and antistatic properties

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Abrasive paper, ANTISTATIC

PS 524 E



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	E-paper

Applications:

Stainless steel	●
Paint/Varnish/Filler	●
Plastic	●
Wood	○

Advantages: Universal belt for hard and tough workpiece surfaces - Produces a brilliant finish on stainless steel surfaces - Fine sanding pattern in the wood and furniture industry - Long service life due to antistatic equipment - Very good price-performance ratio

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Wide belts with paper backing

Coated abrasives

Abrasive paper, ANTISTATIC

PS 24 F ACT



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	F-paper

Applications:

Stainless steel	●
Paint/Varnish/Filler	●
Plastic	●
Wood	●

Advantages: For hard and tough surfaces - Produces a brilliant, high gloss finish on stainless steel surfaces due to the very hard and sharp-edged silicon carbide grit - Long service life on varnish surfaces in the wood and furniture industry due to ACT recipe and antistatic properties



Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Abrasive paper, ANTISTATIC

PS 27 DW



Properties

Bonding agent	Resin
Grain	SiC
Coating	Open
Backing	D-paper

Applications:

Paint/Varnish/Filler	●
Aluminium	●
Plastic	●

Advantages: Special product for high-quality varnish surfaces, especially UV finishes - Substantially reduced clogging and significantly longer service life due to additional stearate coating and antistatic properties



Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Wide belts with paper backing

Coated abrasives



Abrasive paper, ANTISTATIC

PS 28 F



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Open
Backing	F-paper

Applications:

Wood	●
Leather	●



Advantages: Universal type for use on wood, especially softwood - For wide belts up to 1350 mm

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
1120 x 1900	60	F1	10	321842
1120 x 1900	80	F1	10	321843
1120 x 1900	120	F1	10	321845
1120 x 1900	150	F1	10	321846
1350 x 2620	150	F1	10	320417

Abrasive paper, ANTISTATIC

PS 29 F ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Open
Backing	F-paper

Applications:

Wood	●
------	---



Advantages: High-quality universal type for general woodworking - Large product mix - Reduced clogging and longer service life due to ACT recipe and antistatic properties

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
930 x 1525	80	F1	10	307852
930 x 1525	120	F1	10	307854
1100 x 1900	80	F1	10	307857
1100 x 1900	120	F1	10	307859
1120 x 1900	60	F1	10	292903
1120 x 1900	80	F1	10	292904
1120 x 1900	100	F1	10	292935
1120 x 1900	120	F1	10	292936



Wide belts with paper backing

Coated abrasives

► Continuation of PS 29 F ACT, Abrasive paper, ANTISTATIC

Width x Length in mm	Grit	Belt joint	Packing unit/pcs.	Cat. number
1120 x 1900	150	F1	10	292937
1120 x 2150	80	F1	10	307863
1120 x 2150	120	F1	10	307865
1350 x 2620	60	F1	10	292938
1350 x 2620	80	F1	10	292939
1350 x 2620	120	F1	10	292941
1350 x 2620	150	F1	10	292942
1350 x 2620	180	F1	10	307867

Abrasive paper, ANTISTATIC

PS 38 G ACT



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	G-paper

Applications:

Wood-based materials	●
Wood	●
Composite materials	●
Mineral based materials	●

Advantages: High removal rate and fine surface scratch pattern - Developed for fine sanding of wood based materials with wide belts and segmented belts - Outstanding grit adhesion, very long service life due to perfect antistatic properties and ACT recipe



Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive paper

PS 61 F



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	F-paper

Applications:

Stainless steel	●
Steel	●
Wood	○

Advantages: Continuously aggressive abrasive behaviour due to micro-crystalline and self-sharpening ceramic grit - High performance abrasive belt for stainless steel finish grinding



Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Wide belts with paper backing

Coated abrasives



Abrasive paper, KULEX

PS 529 F



NEW !



Properties

Bonding agent	Resin
Grain	SiC agglom.
Backing	F-paper

Applications:

Stainless steel	●
Steel	●
Glass/Stone	○

Advantages: Long life belt for a brilliant and shiny finish, with low and medium contact pressure - Very long service life, with constant surface roughness - Ideal for dry sanding on wide and long belt machines

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Abrasive paper, KULEX

PS 729 F



Properties

Bonding agent	Resin
Grain	Al. oxide agglom.
Backing	F-paper

Applications:

Stainless steel	●
Steel	●

Advantages: Long life belt for dry grinding applications - Extremely high service life - Constant surface quality for pre-grinding until finishing - Especially developed grinding with intermediate contact pressure

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives

Abrasive cloth

CS 308 Y



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	Y-polyester

Applications:

Wood	●	Plastic	ⓘ
NF metals	●		
Stainless steel	●		
Steel	●		

Advantages: Universal product for metal and wood applications - High tear resistance - Moisture proof

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Abrasive cloth

CS 310 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●	Plastic	ⓘ
Steel	●		
Stainless steel	●		
Wood	ⓘ		

Advantages: Universal product with optimal price-performance ratio - Available in a wide grit range

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives



Abrasive cloth ANTISTATIC

CS 311 Y ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Open
Backing	Y-polyester

Applications:

Wood	●
Metals	○

Advantages: Specially developed for calibration grinding of wood - Reduced clogging and longer service life due to ACT recipe and antistatic properties

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Abrasive cloth, waterproof

CS 320 Y



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	Y-polyester

Applications:

Mineral based materials	●
Plastic	●

Advantages: Very hard and sharp silicon carbide grain for hard and tough workpiece surfaces - High aggressiveness and abrasive performance - Especially suitable for wet grinding

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives

Abrasive cloth, waterproof

CS 321 X



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	X-cotton

Applications:

Mineral based materials	●
Plastic	●
Stainless steel	●

Advantages: Produces a brilliant, glossy finish on stainless steel surfaces due to the very hard and sharp-edged silicon carbide grit - Very high aggressiveness and abrasive performance - Especially suitable for wet grinding



Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Abrasive cloth, KULEX

CS 326 Y



Properties

Bonding agent	Resin
Grain	Al. oxide agglom.
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●

Advantages: Long-life abrasive belt for a satin surface scratch pattern, under medium to high grinding pressure - Extremely long life, with consistent surface roughness and finish - Suitable for wet grinding



Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives



Abrasive cloth, KULEX

CS 329 Y



Properties

Bonding agent	Resin
Grain	Al. oxide agglom.
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●



Advantages: Long-life abrasive belt for a satin surface scratch pattern, under low to medium grinding pressure - Especially suitable for dry grinding

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Abrasive cloth

CS 330 X



Properties

Bonding agent	Resin
Grain	SiC/Cork
Coating	Close
Backing	X-cotton

Applications:

Steel	●
Stainless steel	●



Advantages: Special product for soft and fine grinding, polishable due to very hard and sharp edged silicon carbide grit on cork granulate - Special satin finish grinding on steel and stainless steel surfaces - Suitable for dry and wet grinding

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives

Abrasive cloth ANTISTATIC

CS 336 Y



Properties

Bonding agent	Resin
Grain	SiC
Coating	Semi-open
Backing	Y-polyester

Applications:

Wood	●
Mineral based materials	●
Wood-based materials	●

Advantages: High removal rate, especially suitable for calibration of wood-based materials (one piece wide belts up to 1620 mm) - Optimal static reduction - No dust accumulation due to perfect antistatic properties



Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Abrasive cloth, waterproof

CS 341 X



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
Stainless steel	●
Steel	●
NF metals	●

Advantages: Universal product for wet and dry grinding of steel and stainless steel - Excellent wear properties in wet grinding



Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives



Abrasive cloth, multibond

CS 409 Y



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
-----------------	---

Advantages: Aggressive abrasive behaviour due to self-sharpening zirconia alumina - Prevents heat tinting on stainless steel - Cool grinding due to additional multibond - Minimal clogging when used on aluminium and aluminium alloys

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive cloth, waterproof

CS 411 Y



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	Y-polyester

Applications:

Steel	●
Stainless steel	●
Metals	●

Advantages: Aggressive abrasive behaviour - Universal product for use on steel and stainless steel

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives

Abrasive cloth, waterproof

CS 412 Y



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●	Wood	①
Metals	●		
Steel	●		
NF metals	●		

Advantages: Universal product for rough and intermediate grinding of steel and non-ferrous metals

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Abrasive cloth ANTISTATIC

CS 538 Z ACT



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	Z-polyester

Applications:

Wood-based materials	●
Wood	●
Composite materials	●
Mineral based materials	●

Advantages: Exceptionally tear-resistant type of polyester - The perfectly balanced ACT recipe allows for a long service life combined with an excellent removal rate

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Wide belts with cloth backing

Coated abrasives



Abrasive cloth

CS 912 Y ACT



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	Y-polyester

Applications:

Stainless steel	●
Steel	●

Advantages: Continuously aggressive abrasive behaviour due to micro-crystalline and self-sharpening ceramic grit - High performance abrasive belt for stainless steel finish grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request



Fibre discs

About the product

Klingspor fibre discs have high material removal rates and service life, producing an optimal finish. Suitable backing plates complete the product range.

Areas of use are steel, stainless steel, non-ferrous metal and cast iron. The comprehensive grit range makes it possible to select the right tool for every application. Even the most difficult of surfaces can be worked on easily with the fibre discs.

Klingspor fibre discs are outstanding for rough grinding and sanding, de-rusting metal parts, deburring and grinding welded seams. These discs are also suitable for precision finishing work on metals.

The state-of-the-art laser cutting technology allows special shapes for specific applications.


Quality and performance


- ▶ Low clogging rate
- ▶ Market leading service life
- ▶ Even grinding finish
- ▶ Cool grinding

Applications Fibre Discs						
Application	Type	Grain	Backing	Coating	Characteristics	Page
Steel / NF metals	CS 561	Aluminium oxide	Fibre	●	Abrasive fibre disc for working on steel and NF metals	100
	FS 764 ACT	Aluminium oxide	Fibre	●	Abrasive fibre disc for processing steel and non-ferrous metals. High aggressiveness and long service life due to Advanced Coating Technology	102
Steel / Stainless steel	CS 565	Zirconia alumina	Fibre	●	Abrasive fibre disc with high stock removal rate for rough grinding and deburring of steel and stainless steel	103
	FS 964 ACT	Ceramic aluminium oxide	Fibre	●	Premium fibre disc with micro-crystalline, self-sharpening ceramic grit delivering superior aggressiveness and removal on construction steel and high alloy steels. Outstanding grit adhesion and service life thanks to Advanced Coating Technology	105
Stainless steel	CS 570	Zirconia alumina	Fibre	●	High performance fibre disc with additional multibond for high stock removal rate and long service life for cool grinding on stainless steel and high alloy steel, especially for surface grinding	104
	FS 966 ACT	Ceramic aluminium oxide	Fibre	●	High performance fibre disc with very high stock removal rate and extremely long service life, with self-sharpening ceramic grain for the processing of high alloy steel, multibond for cool grinding. Improved grit adhesion due to Advanced Coating Technology	106

● = close ● = semi-open ○ = open

Technical information about the backing pad

The right backing pad		
Product	<div>   </div> <div> ST 358 ST 358 A </div>	
Backing pad form	Medium hard, flat	Hard, ribbed
Benefit	Even grinding finish, good adaptation to the workpiece	High material removal rates, high stability
		Additional benefit of our ribbed backing pad: increased aggression, cool grinding
Application	Finish grinding (grit 50 and finer), edge rounding, contour grinding, surface grinding	Rough grinding (up to grit 40 and coarser), chamfering, deburring work, welded seam work

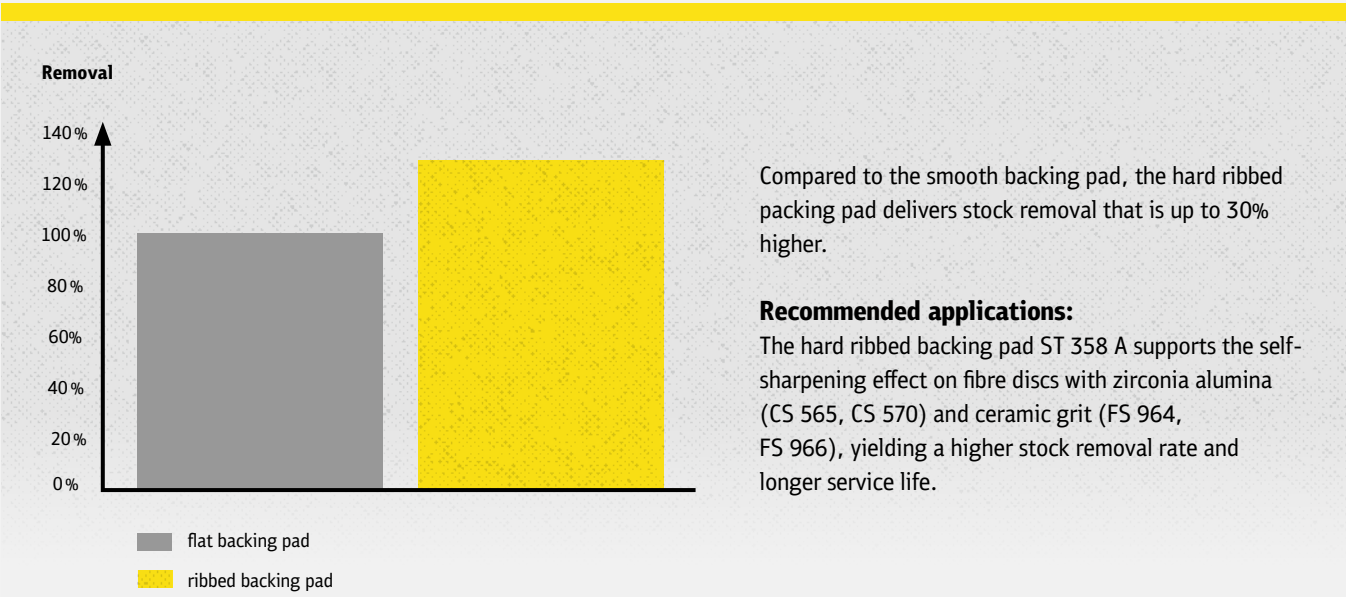

The safe use of Klingspor abrasives

Klingspor fibre discs have been tested according to the guidelines of the oSa directives and are guaranteed to comply with European safety standard EN 13743



Wear safety goggles or glasses to protect the eyes



Wear safety gloves to protect hands



Wear a dust mask



Observe safety instructions



Use ear protectors



Do not use for wet grinding



Only permitted with a backing pad



Do not use if damaged



Hole pattern for fibre discs




10 = round hole



30 = star-shaped hole



50 = X-LOCK



Additional special cutting shapes are available on request. Please ask for more information.




Minimum order quantities for made to order items



We reserve the right to over-deliver or under-deliver made to order items.

Disc diameter	Minimum order quantities
up to 235 mm	1,000 pieces

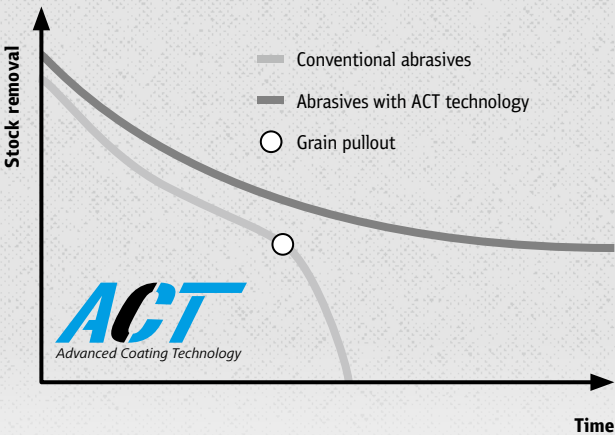

ACT-Advanced Coating Technology
Provides a significantly higher grit adhesion, when working on metal with fibre discs. This significantly increases the life.

Fibre discs

Coated abrasives

Abrasive fibre disc

CS 561



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close

Applications:

Steel	●	Stainless steel	ⓘ
NF metals	●	Wood	ⓘ
Metals	●		
Plastic	ⓘ		

Advantages: For universal use - Largest selection of diameters, grit sizes and hole patterns

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Hole in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
100 x 16	16	⊙ 10	25	65708
100 x 16	24	⊙ 10	25	65713
100 x 16	36	⊙ 10	25	65718
100 x 16	40	⊙ 10	25	65720
100 x 16	50	⊙ 10	25	65725
100 x 16	60	⊙ 10	25	65730
100 x 16	80	⊙ 10	25	65735
100 x 16	120	⊙ 10	25	65743
115 x 22	16	⊙ 10	25	66302
115 x 22	24	⊙ 10	25	72298
115 x 22	36	⊙ 10	25	66308
115 x 22	40	⊙ 10	25	72192
115 x 22	50	⊙ 10	25	66313
115 x 22	60	⊙ 10	25	66318
115 x 22	80	⊙ 10	25	25472
115 x 22	100	⊙ 10	25	66322
115 x 22	120	⊙ 10	25	66327
115 x 22	16	⊗ 30	25	10977
115 x 22	24	⊗ 30	25	10978
115 x 22	30	⊗ 30	25	10979
115 x 22	36	⊗ 30	25	10980
115 x 22	40	⊗ 30	25	10981
115 x 22	50	⊗ 30	25	10982
115 x 22	60	⊗ 30	25	10983
115 x 22	80	⊗ 30	25	10984
115 x 22	100	⊗ 30	25	10985
115 x 22	120	⊗ 30	25	10986
115 x 22	150	⊗ 30	25	10987
115 x 22	180	⊗ 30	25	10988
115 x 22	220	⊗ 30	25	10989
115 x 22	240	⊗ 30	25	10990
115 x 22	320	⊗ 30	25	10992
115 x 22 X-LOCK	24	⊗ 50	25	351150
115 x 22 X-LOCK	36	⊗ 50	25	351147



Fibre discs

Coated abrasives



►► Continuation of CS 561, Abrasive fibre disc

Diameter x Hole in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115 x 22 X-LOCK	40	⊗ 50	25	351149
115 x 22 X-LOCK	60	⊗ 50	25	351148
115 x 22 X-LOCK	80	⊗ 50	25	351146
125 x 22	16	⊙ 10	25	66354
125 x 22	24	⊙ 10	25	66358
125 x 22	36	⊙ 10	25	66364
125 x 22	40	⊙ 10	25	66366
125 x 22	50	⊙ 10	25	66371
125 x 22	60	⊙ 10	25	66376
125 x 22	80	⊙ 10	25	70439
125 x 22	100	⊙ 10	25	66379
125 x 22	120	⊙ 10	25	66383
125 x 22	16	⊗ 30	25	11009
125 x 22	24	⊗ 30	25	11010
125 x 22	30	⊗ 30	25	11011
125 x 22	36	⊗ 30	25	11012
125 x 22	40	⊗ 30	25	11013
125 x 22	50	⊗ 30	25	11014
125 x 22	60	⊗ 30	25	11015
125 x 22	80	⊗ 30	25	11016
125 x 22	100	⊗ 30	25	11017
125 x 22	120	⊗ 30	25	11018
125 x 22	150	⊗ 30	25	11019
125 x 22	180	⊗ 30	25	11020
125 x 22	220	⊗ 30	25	11021
125 x 22	240	⊗ 30	25	11022
125 x 22	320	⊗ 30	25	11024
125 x 22 X-LOCK	24	⊗ 50	25	351145
125 x 22 X-LOCK	36	⊗ 50	25	351144
125 x 22 X-LOCK	40	⊗ 50	25	351143
125 x 22 X-LOCK	60	⊗ 50	25	351139
125 x 22 X-LOCK	80	⊗ 50	25	351142
150 x 22	24	⊗ 30	25	11042
150 x 22	36	⊗ 30	25	11044
150 x 22	40	⊗ 30	25	11045
150 x 22	60	⊗ 30	25	11047
150 x 22	80	⊗ 30	25	11048
150 x 22	120	⊗ 30	25	11050
180 x 22	16	⊙ 10	25	66443
180 x 22	24	⊙ 10	25	66451
180 x 22	36	⊙ 10	25	66459
180 x 22	40	⊙ 10	25	70447
180 x 22	50	⊙ 10	25	70448
180 x 22	60	⊙ 10	25	70449
180 x 22	80	⊙ 10	25	66465
180 x 22	100	⊙ 10	25	66469
180 x 22	120	⊙ 10	25	66472
180 x 22	16	⊗ 30	25	11057
180 x 22	24	⊗ 30	25	11058
180 x 22	36	⊗ 30	25	11060
180 x 22	40	⊗ 30	25	11061



Fibre discs

Coated abrasives

►► Continuation of CS 561, Abrasive fibre disc

Diameter x Hole in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
180 x 22	50	⊗ 30	25	11062
180 x 22	60	⊗ 30	25	11063
180 x 22	80	⊗ 30	25	11064
180 x 22	100	⊗ 30	25	11065
180 x 22	120	⊗ 30	25	11066
180 x 22	180	⊗ 30	25	11068
180 x 22	240	⊗ 30	25	11070
180 x 22	320	⊗ 30	25	11072
235 x 22	24	⊙ 10	25	66497
235 x 22	36	⊙ 10	25	66502
235 x 22	40	⊙ 10	25	66504
235 x 22	60	⊙ 10	25	66511
235 x 22	80	⊙ 10	25	66514

Dispenser see page 108 / Backing pads see page 107-108.

Abrasive fibre disc

FS 764 ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close

Applications:

Steel	●	NF metals	ⓘ
Stainless steel	●	Wood	ⓘ
Metals	●		
Plastic	ⓘ		

Advantages: For universal use - Increased removal rate and outstanding grit adhesion due to special ACT recipe - Long service life - Also suitable for stainless steel

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Hole in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115 x 22	24	⊗ 30	25	316469
115 x 22	36	⊗ 30	25	316470
115 x 22	40	⊗ 30	25	316471
115 x 22	60	⊗ 30	25	316473
115 x 22	80	⊗ 30	25	316474
115 x 22	120	⊗ 30	25	316475
125 x 22	24	⊗ 30	25	316476
125 x 22	36	⊗ 30	25	316477
125 x 22	40	⊗ 30	25	316478
125 x 22	60	⊗ 30	25	316480
125 x 22	80	⊗ 30	25	316481
125 x 22	120	⊗ 30	25	316482
180 x 22	24	⊗ 30	25	316483
180 x 22	36	⊗ 30	25	316484



►► Continuation of FS 764 ACT, Abrasive fibre disc

Diameter x Hole in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
180 x 22	40	⊗ 30	25	316485
180 x 22	60	⊗ 30	25	316487
180 x 22	80	⊗ 30	25	316488
180 x 22	120	⊗ 30	25	316489

Dispenser see page 108 / Backing pads see page 107-108.

Abrasive fibre disc

CS 565



XLOCK !

Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close

Applications:

Stainless steel	●
Steel	●
Metals	●



Advantages: Self-sharpening effect - High aggressiveness on steel and stainless steel - Ideal for rough grinding work - Excellent price-performance ratio

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Hole in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
100 x 16	36	⊙ 10	25	23680
100 x 16	60	⊙ 10	25	84604
100 x 16	80	⊙ 10	25	188678
115 x 22	24	⊙ 10	25	93409
115 x 22	36	⊙ 10	25	65698
115 x 22	60	⊙ 10	25	65700
115 x 22	80	⊙ 10	25	65701
115 x 22	24	⊗ 30	25	95335
115 x 22	36	⊗ 30	25	6686
115 x 22	40	⊗ 30	25	242801
115 x 22	50	⊗ 30	25	92066
115 x 22	60	⊗ 30	25	6687
115 x 22	80	⊗ 30	25	6688
115 x 22	100	⊗ 30	25	204609
115 x 22 X-LOCK	24	⊗ 50	25	351141
115 x 22 X-LOCK	36	⊗ 50	25	351140
115 x 22 X-LOCK	40	⊗ 50	25	351154
115 x 22 X-LOCK	60	⊗ 50	25	351160
115 x 22 X-LOCK	80	⊗ 50	25	351159
125 x 22	36	⊙ 10	25	65681
125 x 22	40	⊙ 10	25	242802
125 x 22	60	⊙ 10	25	65707
125 x 22	80	⊙ 10	25	23001
125 x 22	24	⊗ 30	25	97643
125 x 22	36	⊗ 30	25	6620
125 x 22	40	⊗ 30	25	242803



Fibre discs

Coated abrasives

►► Continuation of CS 565, Abrasive fibre disc

Diameter x Hole in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125 x 22	50	⊗ 30	25	93054
125 x 22	60	⊗ 30	25	6721
125 x 22	80	⊗ 30	25	23005
125 x 22	100	⊗ 30	25	204611
125 x 22 X-LOCK	24	⊗ 50	25	351158
125 x 22 X-LOCK	36	⊗ 50	25	351161
125 x 22 X-LOCK	40	⊗ 50	25	351157
125 x 22 X-LOCK	60	⊗ 50	25	351156
125 x 22 X-LOCK	80	⊗ 50	25	351155
180 x 22	36	⊙ 10	25	65702
180 x 22	60	⊙ 10	25	65705
180 x 22	80	⊙ 10	25	65706
180 x 22	24	⊗ 30	25	95993
180 x 22	36	⊗ 30	25	65703
180 x 22	40	⊗ 30	25	242807
180 x 22	50	⊗ 30	25	93045
180 x 22	60	⊗ 30	25	6690
180 x 22	80	⊗ 30	25	6691

Dispenser see page 108 / Backing pads see page 107-108.

Abrasive fibre disc, multibond

CS 570



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close

Applications:

Stainless steel	●
Aluminium	●
NF metals	⦿

Advantages: Self-sharpening effect - High aggressiveness, especially suitable for stainless steel - Increase in performance due to low temperatures - Multibond prevents heat tinting - Especially suitable for use on aluminium

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Hole in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
100 x 16	36	⊙ 10	25	204823
100 x 16	60	⊙ 10	25	204825
100 x 16	80	⊙ 10	25	204826
100 x 16	120	⊙ 10	25	204828
115 x 22	36	⊙ 10	25	204797
115 x 22	60	⊙ 10	25	204799
115 x 22	80	⊙ 10	25	204800
115 x 22	120	⊙ 10	25	204802
115 x 22	24	⊗ 30	25	204085
115 x 22	36	⊗ 30	25	204086
115 x 22	40	⊗ 30	25	250258
115 x 22	50	⊗ 30	25	204087



►► Continuation of CS 570 ,Abrasive fibre disc, multibond

Diameter x Hole in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115 x 22	60	⊗ 30	25	204088
115 x 22	80	⊗ 30	25	204089
115 x 22	100	⊗ 30	25	204090
115 x 22	120	⊗ 30	25	204091
125 x 22	36	⊙ 10	25	204806
125 x 22	60	⊙ 10	25	204811
125 x 22	80	⊙ 10	25	204812
125 x 22	120	⊙ 10	25	204814
125 x 22	24	⊗ 30	25	204092
125 x 22	36	⊗ 30	25	204093
125 x 22	40	⊗ 30	25	250259
125 x 22	50	⊗ 30	25	204094
125 x 22	60	⊗ 30	25	204095
125 x 22	80	⊗ 30	25	204096
125 x 22	100	⊗ 30	25	204097
125 x 22	120	⊗ 30	25	204098
180 x 22	24	⊗ 30	25	204099
180 x 22	36	⊗ 30	25	204100
180 x 22	40	⊗ 30	25	250260
180 x 22	60	⊗ 30	25	204102
180 x 22	80	⊗ 30	25	204103
180 x 22	120	⊗ 30	25	204105

Dispenser see page 108 / Backing pads see page 107-108.

Abrasive fibre disc

FS 964 ACT



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close

Applications:

Steel	●
Stainless steel	●



Advantages: Premium product with excellent performance for working on steel - Micro-crystalline self-sharpening effect - High aggressiveness thanks to self-sharpening, aggressive ceramic grains throughout the service life - Outstanding grit adhesion - Advanced coating technology (ACT) for extraordinary grain adhesion and extended service life

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Hole in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115 x 22	24	⊗ 30	25	330478
115 x 22	36	⊗ 30	25	330498
115 x 22	40	⊗ 30	25	330482
115 x 22	50	⊗ 30	25	330480
115 x 22	60	⊗ 30	25	330479
115 x 22	80	⊗ 30	25	330481
115 x 22	120	⊗ 30	25	330483
125 x 22	24	⊗ 30	25	330484



Fibre discs

Coated abrasives

►► Continuation of FS 964 ACT, Abrasive fibre disc

Diameter x Hole in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125 x 22	36	⊗ 30	25	330485
125 x 22	40	⊗ 30	25	330486
125 x 22	50	⊗ 30	25	330488
125 x 22	60	⊗ 30	25	330487
125 x 22	80	⊗ 30	25	330490
125 x 22	120	⊗ 30	25	330491
180 x 22	24	⊗ 30	25	330489
180 x 22	36	⊗ 30	25	330492
180 x 22	40	⊗ 30	25	330493
180 x 22	50	⊗ 30	25	330494
180 x 22	60	⊗ 30	25	330495
180 x 22	80	⊗ 30	25	330496

Dispenser see page 108 / Backing pads see page 107-108.

Abrasive fibre disc, multibond

FS 966 ACT



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close

Applications:

Stainless steel	●
-----------------	---



Advantages: Micro-crystalline self-sharpening effect - High aggressiveness throughout the service life - Outstanding grit adhesion - Long service life, especially suitable for heavy duty applications - Increase in performance due to low temperatures - Multibond prevents heat tinting

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Hole in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115 x 22	36	⊗ 30	25	316490
115 x 22	40	⊗ 30	25	316491
115 x 22	50	⊗ 30	25	318504
115 x 22	60	⊗ 30	25	316492
115 x 22	80	⊗ 30	25	316493
115 x 22	120	⊗ 30	25	324237
115 x 22 X-LOCK	40	⊗ 50	25	351166
115 x 22 X-LOCK	60	⊗ 50	25	351167
115 x 22 X-LOCK	80	⊗ 50	25	351165
125 x 22	24	⊗ 30	25	318305
125 x 22	36	⊗ 30	25	316494
125 x 22	40	⊗ 30	25	316495
125 x 22	60	⊗ 30	25	316496
125 x 22	80	⊗ 30	25	316497
125 x 22	120	⊗ 30	25	324239
125 x 22 X-LOCK	40	⊗ 50	25	351164
125 x 22 X-LOCK	60	⊗ 50	25	351163
125 x 22 X-LOCK	80	⊗ 50	25	351162



Fibre discs / Backing pads

Coated abrasives



►► Continuation of FS 966 ACT, Abrasive fibre disc, multibond

Diameter x Hole in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
180 x 22	24	⊗ 30	25	318352
180 x 22	36	⊗ 30	25	316498
180 x 22	40	⊗ 30	25	316499
180 x 22	60	⊗ 30	25	316501
180 x 22	80	⊗ 30	25	316502
180 x 22	120	⊗ 30	25	324238

Dispenser see page 108 / Backing pads see page 107-108.

Backing pad

ST 358



XLOCK !



Advantages: Medium-hard backing pad allows good adaptation to the workpiece - For universal use, especially for surface and finish grinding (grit 50 and finer) - High temperature resistance

Diameter in mm	Thread/Shaft	Suitable for	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100	thread M10	Diameter 100 x 16	80 m/s	15300 rpm	1	305190
100	thread M14	Diameter 100 x 22	80 m/s	15300 rpm	1	2774
115 X-LOCK	X-LOCK	Ø 115 X-LOCK	80 m/s	13300 rpm	1	352049
115	thread M10	Diameter 115 x 22	80 m/s	13300 rpm	1	14859
115	thread M14	Diameter 115 x 22	80 m/s	13300 rpm	1	14838
125 X-LOCK	X-LOCK	Ø 125 X-LOCK	80 m/s	12200 rpm	1	352048
125	thread M14	Diameter 125 x 22	80 m/s	12200 rpm	1	14835
150	thread M14	Diameter 150 x 22	80 m/s	10200 rpm	1	14836
180	thread M14	Diameter 180 x 22	80 m/s	8500 rpm	1	14840
235	thread M14	Diameter 235 x 22	80 m/s	6600 rpm	1	14841

Backing pads / Dispenser for fibre discs

Backing pad

ST 358 A



Advantages: For rough grinding - Cool grinding - Increased aggressiveness due to hard, ribbed abrasive surface - High temperature resistance and stability

Diameter in mm	Thread/Shaft	Suitable for	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 X-LOCK	X-LOCK	Ø 115 X-LOCK	80 m/s	13300 rpm	1	352047
115	thread M14	Diameter 115 x 22	80 m/s	13300 rpm	1	126346
125 X-LOCK	X-LOCK	Ø 125 X-LOCK	80 m/s	12200 rpm	1	352046
125	thread M14	Diameter 125 x 22	80 m/s	12200 rpm	1	126347
180	thread M14	Diameter 180 x 22	80 m/s	8500 rpm	1	126348

Dispenser for fibre discs

FS 555



Advantages: Easy stocking and removal of up to 100 fiber discs with diameter of 115 to 180 mm - Orderly and accessible storage at the workplace

Fibre discs not included

Width x Length x Height in mm	Packing unit/pcs.	Cat. number
170 x 140 x 196	1	316463





Strips/Sheets/Discs

About the product

Klingspor manufactures a very large selection of high quality abrasive products for the strips, sheets and discs product sectors.

Application	Type	Grain	Backing	Coating	Characteristics	Page
Steel / stainless steel	PS 21 FK	Zirconia alumina	F-paper	●	Premium self-fastening product for finish grinding stainless steel and other metal surfaces using hand operated machines. Ultra high level of aggressiveness and outstanding service life thanks to self-sharpening zirconia alumina. Exceptional stability and excellent edge strength on the perimeter thanks to strong F-paper backing	141
	PS 61 FK	Ceramic aluminium oxide	F-paper	●	Close coating, strong backing and micro-crystalline, self-sharpening ceramic grain provide an aggressive grinding behaviour on steel and stainless steel	149
Steel / metals	KL 361 JF	Aluminium oxide	JF-cotton	●	High quality, highly flexible abrasive cloth for versatile applications in the metal processing industry, also suitable for stainless steel	131, 134
	KL 371 X	Aluminium oxide	X-cotton	●	Economical universal product for surface grinding in metal processing	132
	KL 385 JF	Aluminium oxide	JF-cotton	●	Highly flexible universal product for the metal processing industry, good price-performance ratio	133
	CS 411 XK	Zirconia alumina	X-cotton	●	Product for universal use during the processing of metal and stainless steel that offers a robust, tear resistant cloth-reinforced backing. Unrivalled versatility and a high level of aggressiveness and grinding performance during rough grinding applications on steel and stainless steel	160
Wood	PS 22 F ACT	Aluminium oxide	F-paper	●	Close coating for maximum stock removal and uniform scratch pattern regarding surface treatment of hard, low-content woods. Advanced Coating Technology (ACT) and antistatic properties prevent premature clogging	123
	PS 22 K	Aluminium oxide	E-paper	⦿	Abrasive paper with semi-open coating and exceptional machining performance to create a uniform scratch pattern when processing wood and metal	123, 142
	PS 30 D	Aluminium oxide	D-paper	⦿	Economical abrasive paper for versatile applications in the processing of wood and paint	120, 123
	PS 19 EK	SiC	E-paper	●	Robust high performance product with stable E-paper backing for coarse, intermediate and finish sanding. Ideal for hard and difficult-to-machine materials due to the use of sharp-edged silicon carbide	125
	PL 31 B	Aluminium oxide	B-paper	⦿	Flexible finishing paper with an optimal price-performance ratio for a wide range of applications for the processing of wood, paint and varnish. Provides a smooth surface finish	120, 124
	SW 501 TR	Aluminium oxide	Sponge	●	Highly flexible abrasive sponge, coated on 2 sides, for hand sanding of profiles and contours, extremely resistant to creasing and tearing, washable and reusable, solvent-free bonding system with a colour scheme that varies with the grit size	136

● = close ⦿ = semi-open ○ = open

Cloth

JF	Cotton, light, highly flexible
GX	Blended cloth, light, flexible
J	Cotton, light
XF	Cotton, heavy, flexible
X	Cotton, heavy
Y	Polyester, heavy, highly firm
Z	Polyester, heavy, highly firm, can be divided into segments

Paper

A	approx. 95 g/m ²
B	approx. 105 g/m ²
C	approx. 110 g/m ²
D	approx. 130 g/m ²
E	approx. 250 g/m ²
F	approx. 300 g/m ²
G	ca. 400 g/m ²

Properties

K	Self-fastening
W	Coated with active agent

Strips/Sheets/Discs

Applications guide

Application	Type	Grain	Backing	Coating	Characteristics	Page
Paint / Varnish / Filler	PS 33 B	Aluminium oxide	B-paper	●	High quality abrasive paper, especially suited for paint, varnish and filler	122
	PS 33 BK	Aluminium oxide	B-paper	●	High quality self-fastening product, especially for work on paint, varnish and filler	127, 148
	PS 33 C	Aluminium oxide	C-paper	●	High quality abrasive paper, especially suited for paint, varnish and filler	121
	PS 33 CK	Aluminium oxide	C-paper	●	High quality self-fastening product, especially for work on paint, varnish and filler	126, 146
	PS 73 BW	Aluminium oxide	B-paper	●	High quality abrasive paper, especially suited for the processing of paint, varnish and filler, with a special coating for a long service life	122
	PS 73 BWK	Aluminium oxide	B-paper	●	High quality abrasive product, especially for work on paint, varnish and filler, with a long service life thanks to added active agent coating	152
	PS 73 CWK	Aluminium oxide	C-paper	●	High quality abrasive product, especially for work on paint, varnish and filler, with a long service life thanks to added active agent coating	151
	PS 77 CK T-ACT	Aluminium oxide	C-paper	●	High performance product with new innovative coating technology that keeps the disc from clogging prematurely during the sanding of strongly adhesive materials. Coarse and intermediate sanding with premium latex C-paper	129, 154
	PS 19 EK	SiC	E-paper	●	Robust high performance product with stable F weight paper backing for coarse, intermediate and finish sanding. Ideal for hard and difficult-to-machine materials due to incredibly sharp silicon carbide grain	125, 141
	FP 73 WK	Aluminium oxide	Film	●	Special product with very tear resistant film backing for the processing of paint, varnish and filler with high service life through additional special coating	128, 150
	FP 77 K T-ACT	Aluminium oxide	Film	●	High performance product with new innovative coating technology that keeps the disc from clogging prematurely during the sanding of strongly adhesive materials. Fine and finish sanding with an exceptionally stable and tear resistant film backing	128, 153
	PS 11 A	SiC	A-paper	●	High quality, highly flexible, waterproof abrasive paper for working on paint, varnish and filler especially in the car repair sector	119
	PS 11 C	SiC	C-paper	●	High quality, highly flexible, waterproof abrasive paper for working on paint, varnish and filler especially in the car repair sector	118, 140
	PS 8 A	SiC	A-paper	●	Very flexible, waterproof abrasive paper for processing paint, varnish and filler predominantly in the sector of car repair and body paint	117
	PS 8 C	SiC	C-paper	●	Very flexible, waterproof abrasive paper for processing paint, varnish and filler predominantly in the sector of car repair and body paint	117
	FD 500	Aluminium oxide / SiC	Foam core		Foam-coated disc for finishing. Superior flexibility and adaptability on contours and profiles	158
	SK 500	Aluminium oxide	Sponge	●	Abrasive block coated on four sides for fine work on contoured and flat surfaces. The abrasive block is robust, can be washed and reused. It is suitable for wet and dry finishing	135
	SK 700 A	Aluminium oxide	Sponge	●	Suitable for flat or upright use on all four sides; the angled edge (approx. 45°) makes it an exceptional choice for narrow, tapering workpiece contours. Excellent contouring and pressure distribution thanks to flexible foam core. Robust, washable and reusable	135
	SW 501	Aluminium oxide	Sponge	●	Highly flexible hand finishing tool. Abrasive sponge coated on two sides with plastic foam core. Resistant to creases and breaks, can be washed and reused. Suitable for dry and wet finishing	136
	SW 501 TR	Aluminium oxide	Sponge	●	Extremely tear resistant version of the abrasive sponge SW 501. Extra long service life, solvent-free bonding system with a colour scheme that varies with the grit size	136
	SW 502	SiC	Sponge	●	Structure like SW 501, though with more aggressive SiC grit	137
	SW 510	Aluminium oxide	Sponge	●	Thin, ultra flexible sanding sponge for particularly hard-to-reach areas such as indentations, profiles and edges. Tight foam structure, allowing for exceptionally uniform pressure distribution and an extra fine finish. No bending, no creases. Can be used wet and dry	137
Composites, gel coats, paints and coatings, plaster and plasterboard, wood fillers and varnish	AN 400	Aluminium oxide	Abrasive screen	●	Effective high extraction dust removal thanks to open grid structure	129, 156

● = close ● = semi-open ○ = open

Minimum order quantities for made to order items

Product	Dimensions	Minimum order quantities
Sheets	230 × 280 mm	250 pieces
	70 × 450 mm	500 pieces
Strips	115 × 140 mm	1,000 pieces
	93 × 230 mm	500 pieces
	115 × 280 mm	500 pieces
Sheets exceeding 230 x 280 mm	Minimum quantities on request	
Large sheets	1400 × 1540 mm	10 pieces

Product	Dimensions	Minimum order quantities
Self-fastening products	70 × 125 mm	1,000 pieces
	80 × 133 mm	1,000 pieces
	93 × 230 mm	500 pieces
	100 × 115 mm	1,000 pieces
	115 × 280 mm	500 pieces

Other sizes available on request.

Strips/Sheets

- ▶ for general use for freehand sanding and finishing and for use with handheld power tools
- ▶ specially designed for particular materials (e.g. wood, metal, etc.)
- ▶ special sizes available on request
- ▶ for wet and dry applications
- ▶ paper or cloth backed

Hole patterns for strips

Klingspor offers a wide range of products with hole patterns for dust extraction. The hole pattern you require depends on the machine you are using. The chart alongside shows the most popular types of machines and the required hole pattern.









You will find the available hole patterns marked in the tables on the following product pages.

If the product you require is not in stock, we will manufacture it for you subject to a minimum order quantity.

Other hole patterns available on request.

Discs

- ▶ for general use with many types of machines
- ▶ special designs with a wide range of hole patterns
- ▶ various sizes on customer's request
- ▶ for wet and dry applications
- ▶ backings: paper, film, non-woven web and surface conditioning material
- ▶ self-fastening products
- ▶ suitable backing plate for angle grinder / orbital sander

	GL 1	115 × 280 mm 10 holes Ø 10 mm
	GL 3	93 × 230 mm 8 holes Ø 10 mm
	GL 9	93 × 230 mm 8 holes Ø 10 mm
	GL 11	115 × 280 mm 14 holes Ø 10 mm
	GL 13	115 × 280 mm 8 holes Ø 10 mm
	GL 15	115 × 230 mm 10 holes Ø 10 mm
	GL 17	93 × 180 mm 8 holes Ø 10 mm
	GL 18	80 × 133 mm 8 holes Ø 10 mm



We reserve the right to over-deliver or under-deliver made to order items.

Strips/Sheets/Discs

Applications guide

Klingspor strips for every tool

Please contact Klingspor if you cannot find the machine used by you on this list. We will be pleased to assist you further.

Manufacturer	Type	Size in mm	Hole pattern	Design
AEG powertools	FS 2	80 × 133	GL 18	self-fastening
	VS/E 230, VSS/E 260	93 × 180	GL 17	self-fastening
	VSSE 260, VSS 260	93 × 230	GL 9	for clamping
	FDS 140	115 × 140	GL 38	for clamping
	FDS 140	115 × 140	GL 39	self-fastening
	VSS 20, VSSE 230, VS 280, VSE 280, VSSE 280	115 × 230	GL 16	self-fastening
	VSS 20, VSSE 20, VS 280, VSSE 280	115 × 280	plain	for clamping
	VSS/E 20, VS/E 280, VSSE 280	115 × 280	GL 11	for clamping
Atlas Copco	VS 11	80 × 133	GL 18	self-fastening
	VSS 20, VSSE 20	115 × 230	GL 16	self-fastening
	VSS 20, VSSE 20	115 × 280	GL 11	self-fastening
	LS030 H070-3, LS030 S070-3	93 × 180	plain	for clamping
	LS031 H070-3, LS031 S070-3, LS032 H070-3, LS032 S070-3	93 × 180	GL 3	for clamping
Black & Decker	P 63-01	80 × 133	GL 18	self-fastening
	KA 330 EKA	90 × 190	GL 4	self-fastening
	KA 175, KA 186, KA 186 E	93 × 180	GL 17	self-fastening
	KA 320 EKA	93 × 190	GL 4	self-fastening
	KA 320 EKA, KA 300	93 × 230	GL 3	for clamping
	BD 175, BD 180 E, DN 41 AE, DN 180 E, KA 185, KA 185 E, KC 185 E	93 × 230	GL 9	for clamping
	KC 962, VB 135 A, CD 400, BN 41 AE	93 × 230	GL 9	for clamping
	KA 185, KA 185 E	93 × 230	plain	for clamping
	KA 273	115 × 230	GL 16	self-fastening
	P 63-03, P 63-04, P 63-05, BD 273, SR 410	115 × 280	plain	for clamping
	P 63-03, P 63-04, P 63-05, KA 273, SR 410 E, BD 273, DN 41, BD 175, BD 180E	115 × 280	GL 11	for clamping
	VB 135A, DN 180E, KA 185E, KC 962, DN 49, DN 273, VB 250 E, KA274EKA	115 × 280	GL 11	for clamping
Bosch	PSS 240 A, PSS 240 AE, GSS 16 A	80 × 133	GL 18	self-fastening
	GSS 23 AE, GSS 230 A, GSS 230 AE, PSS 22, PSS 23, PSS 23 AE	93 × 180	GL 17	self-fastening
	PSS 23 A, PSS 180, PSS 240, PSS 180 A, PSS 240 A, PSS 240 AE	93 × 180	GL 17	self-fastening
	GSS 230 AVE Professional	93 × 185	GL 10	self-fastening
	PSS 250 AE, PSS 200 A	93 × 190	GL 10	self-fastening
	PSS 240 A, PSS 240 AE, GSS 23, GSS 23 AE, GSS 230 AE, GSS 230 AVE Professional	93 × 230	GL 9	for clamping
	PSS 22, PSS 23 A, PSS 230, PSS 23, PSS 23 AE, PSS 250 AE,	93 × 230	GL 9	for clamping
	GSS 23, GSS 23 AE, GSS 230 AE, PSS 22, PSS 23, PSS 23 A, PSS 23 AE, PSS 230	93 × 230	plain	for clamping
	GSS 140 A	115 × 107	GL 37	self-fastening
	1289 D	115 × 115	plain	self-fastening
	GSS 140 A	115 × 140	GL 38	for clamping
	GSS 28/A, GSS 280 A/AE, PSS 28 AE/280 AE, PSS 300 AE, GSS 280 AVE Professional	115 × 230	GL 16	self-fastening
	GSS 28, PSS 28 AE, PSS 280 AE, GSS 280 AE	115 × 280	plain	for clamping
	GSS 28, PSS 28 AE, PSS 280 AE, GSS 280 AE, PSS 300 AE, GSS 280 AVE Professional	115 × 280	GL 11	for clamping



Manufacturer	Type	Size in mm	Hole pattern	Design
Casals	KLR 210, VLR 210, BLR 170	93 × 180	GL 17	self-fastening
	BLR 250, VLR 300	115 × 230	GL 16	self-fastening
	LN 216, LR 228	115 × 280	plain	for clamping
DeWalt, ELU	D26423, D 26422	93 × 230	GL 3	self-fastening
	D26441	108 × 115	GL 20	self-fastening
	DW634, DW636, VS 41, VS 71	115 × 230	GL 16	self-fastening
	VS 71	115 × 280	plain	for clamping
	DW634, DW636, VS 41, VS 71	115 × 280	GL 1	for clamping
	D26420, D26421	115 × 280	GL 1	self-fastening
	D26441	140 × 115	GL 33	for clamping
Einhell	EST 170	93 × 180	GL 17	self-fastening
	BSS 150, BT-OS 150	93 × 230	GL 3	for clamping
	RT-OS 30, BT-OS 280 E	115 × 230	GL 15	self-fastening
	ERU 270	115 × 230	GL 16	self-fastening
	RT-OS 30, BT-OS 280 E	115 × 280	GL 1	for clamping
	SS-G 270, BSS 250	115 × 280	GL 13	for clamping
Fein	MSs 641 a, MSs 641 b	115 × 230	GL 16	self-fastening
	MSs 641 a, MSs 641 b	115 × 280	GL 11	for clamping
	MSs 641 a, MSs 641 b	115 × 280	GL 11	self-fastening
Felisatti	TP 31 E	80 × 133	GL 18	self-fastening
	TP 115/350 VE, TP 517/AS	115 × 280	plain	for clamping
Festool	RS 4, RS 4 E, RS 4 - STF, RS 4 E - STF, RS 400, RS 400 Plus, RTS 400 (EQ-Plus, EQ, Q-Plus, Q)	80 × 133	GL 18	self-fastening
	RS 3 - STF, RS 4 E - STF, RS 4, RS 4 E	80 × 165	GL 8	for clamping
	RS 3, RS 3 Plus, RS 3 E, RS 3 E Plus, RS 3 - STF, RS 3 E - STF, RS 300, RS 300 Q/EQ	93 × 180	GL 17	self-fastening
	RS 3 - SFE, RS 3 E - SFE, LRS 93	93 × 180	GL 17	self-fastening
	RS 3 - STF, RS 3 E - STF	93 × 230	plain	for clamping
	RS 3 - STF, RS 3 E - STF	93 × 230	GL 9	for clamping
	RS 1, RS 2, RS 2 E, LRB - IAS, RS 200, RS 100C, RS 100 CQ, RS 200 Q/EQ	115 × 230	GL 15	self-fastening
	RS 2 - STF, RS 2 E - STF, RS 1 - STF, RS 2, RS 2 E	115 × 230	GL 16	self-fastening
	RS 2 - STF, RS 2 E - STF, RS 1 - STF	115 × 280	plain	for clamping
	RS 2 - STF, RS 2 E - STF, RS 1 - STF	115 × 280	GL 11	for clamping
Flex	OS 80-2, OSE 80-2	80 × 133	GL 18	self-fastening
	MS 713	115 × 105	GL 43	self-fastening
HILTI	WFO 280	115 × 280	GL 1	for clamping
	WFO 280	115 × 230	GL 15	self-fastening

Strips/Sheets/Discs

Applications guide

Manufacturer	Type	Size in mm	Hole pattern	Design
Hitachi	SV 8 SA	80 × 133	GL 18	self-fastening
	FS 10 SB	93 × 180	GL 17	self-fastening
	SV 12 SG	114 × 104	GL 19	self-fastening
	SV 12 SF	115 × 115	GL 20	self-fastening
	SV 12 SD, SV 12 V	115 × 230	GL 16	self-fastening
HOLZ HER	2436, 2437	93 × 180	GL 6	self-fastening
	2440	115 × 230	GL 15	self-fastening
	2441	115 × 230	GL 16	self-fastening
Kress	CRS 6165 A, CRS 6175 EA, 250 RSE Set, 300 RSE	115 × 230	GL 16	self-fastening
	CRS 6165 A, CRS 6175 EA, 250 RSE Set, 300 RSE	115 × 280	GL 11	for clamping
Mafell	UVA 115 E	115 × 230	GL 11	self-fastening
	U 115E, UK 115/ 115 E	115 × 230	GL 15	self-fastening
	U 115, U 115 E	115 × 230	GL 16	self-fastening
	U 115E, UK 115/ 115 E	115 × 280	GL 1	for clamping
Makita	B0 3700, B0 3711	93 × 230	GL 9	for clamping
	B0 4554, B0 4556, B0 4565, B0 4555, B0 4566	115 × 103	GL 19	self-fastening
	9045 B, 9045 N, 9046, B0 4900V	115 × 230	GL 16	self-fastening
	B0 4556, B0 4558, B0 4555	115 × 140	GL 38	for clamping
	B0 4901, 9046	115 × 280	plain	for clamping
	9046, B0 4900V	115 × 280	GL 11	for clamping
Metabo	SR 4350	93 × 180	GL 17	self-fastening
	SRE 4350 TURBOTEC	93 × 185	GL 10	self-fastening
	SR 221, SR 321, SR 4320, SFE 227, SF 226	93 × 230	plain	for clamping
	SR 226, SRE 227, SR 180 INTEC, SRE 4350 TURBOTEC	93 × 230	GL 9	for clamping
	SRE 357, SR 356, SR 10-23, SR 10-23 Intec, SR 20-23	93 × 230	plain	for clamping
	SR 216, SRE 217, SRA 60	115 × 115	GL 20	self-fastening
	FSR 200 INTEC	115 × 103	GL 19	self-fastening
	SR 358, SRE 359, SR 4351, SRE 4351 TURBOTEC	115 × 230	GL 16	self-fastening
	SR 328, SRE 329, SR 4321, SR 358, SRE 359	115 × 280	plain	for clamping
Milwaukee	POS 13	80 × 133	GL 18	self-fastening
Peugeot	PV 240 A, TV 4102	93 × 180	GL 17	self-fastening
	TV 4003, TV 4103	115 × 230	GL 16	self-fastening
Ryobi	ESS 2590	93 × 180	GL 17	self-fastening
	ESS 200 RS	93 × 185	GL 10	self-fastening
	ESS 1890 C	93 × 190	GL 10	self-fastening
	S 35, NS 40, NS 40 I, NS-801	93 × 230	plain	for clamping
	S 35, NS-40I, NS 801, NS 40, ESS 1890 C, ESS 2590, ESS 200 RS, ESS 280 RV	93 × 230	GL 9	for clamping
	E0S 2410	115 × 110	GL 29	self-fastening
	NS-6200, NS 6300 A, ESS 3215 V	115 × 230	GL 16	self-fastening
	NS 6300 A	115 × 280	plain	for clamping
	ESS 3215 VHG	115 × 280	GL 11	for clamping
SKIL	7300, 7300 S, 7330, 7390, 7395, 7365 AA	93 × 180	GL 17	self-fastening
	7366 AA, 7351 AA, 7346 AA, 7346, 7361 AB	93 × 190	GL 10	self-fastening
	7315, 7320, 7330, 7365 AA, 7366 AA, 7351 AA, 7346 AA, 7346, 7361 AB	93 × 230	GL 9	for clamping
	7314 MA	115 × 110	GL 29	self-fastening
	7312 AA, 7314 MA	115 × 140	GL 38	for clamping
	666, 7381 MA	115 × 230	GL 16	self-fastening
	7381 MA	115 × 280	GL 11	for clamping

Sheets with paper backing

Coated abrasives



Abrasive paper, waterproof

PS 8 C



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●
Glass/Stone	ⓘ
Metals	ⓘ

Advantages: Ideal for hard and tough surfaces - Very flexible latex paper allows excellent adaptation - Can be used for wet and dry grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	60	50	269424
230 x 280	80	50	269429
230 x 280	100	50	269435
230 x 280	120	50	269444
230 x 280	150	50	269448

Abrasive paper, waterproof

PS 8 A



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	A-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●
Glass/Stone	ⓘ
Metals	ⓘ

Advantages: Ideal for hard and tough surfaces - Very flexible latex paper allows excellent adaptation - Can be used for wet and dry grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	180	50	269269
230 x 280	220	50	269275
230 x 280	240	50	269279
230 x 280	280	50	269285
230 x 280	320	50	269289
230 x 280	360	50	269294



Sheets with paper backing

Coated abrasives

► Continuation of PS 8 A, Abrasive paper, waterproof

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	400	50	269299
230 x 280	600	50	269314
230 x 280	800	50	269323
230 x 280	1000	50	269328

Abrasive paper, waterproof

PS 11 C



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●
Glass/Stone	○
Metals	○

Advantages: Special product for auto repair and painting - For hard and tough surfaces - Good adaptation and high stability - Wet and dry sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	60	50	2022
230 x 280	80	50	2023
230 x 280	100	50	2117
230 x 280	120	50	2116
230 x 280	150	50	2011
230 x 280	180	50	2012
230 x 280	220	50	2013
230 x 280	240	50	2014
230 x 280	280	50	2015
230 x 280	320	50	2016
230 x 280	360	50	2017
230 x 280	400	50	2018

Sheets with paper backing

Coated abrasives



Abrasive paper, waterproof

PS 11 A



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	A-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●
Glass/Stone	①
Metals	①

Advantages: Special product for auto repair and painting - For hard and tough surfaces - Good adaptation and high stability - Wet and dry sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	220	50	2002
230 x 280	240	50	2003
230 x 280	280	50	2004
230 x 280	320	50	2005
230 x 280	360	50	2006
230 x 280	400	50	2007
230 x 280	500	50	2008
230 x 280	600	50	2009
230 x 280	800	50	2010
230 x 280	1000	50	11892
230 x 280	1200	50	6616
230 x 280	1500	50	186794
230 x 280	2000	50	186795

Sheets with paper backing

Coated abrasives

Abrasive paper

PS 30 D



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	D-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	○

Advantages: Product with good price-performance ratio - For diverse applications

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	40	50	194660
230 x 280	60	50	194662
230 x 280	80	50	194663
230 x 280	100	50	194664
230 x 280	120	50	194665
230 x 280	150	50	194666
230 x 280	180	50	194667
230 x 280	240	50	194668
230 x 280	320	50	194669

Finishing paper

PL 31 B



Properties

Bonding agent	Glue
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	○

Advantages: Product with optimal price-performance ratio - Optimized wear properties for hand grinding - Very fine surface scratch pattern

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	40	50	2059
230 x 280	50	50	2060
230 x 280	60	50	2061
230 x 280	80	50	2062



Sheets with paper backing

Coated abrasives



►► Continuation of PL 31 B, Finishing paper

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	100	50	2048
230 x 280	120	50	2049
230 x 280	150	50	2050
230 x 280	180	50	2051
230 x 280	220	50	2052
230 x 280	240	50	2053
230 x 280	280	50	2054
230 x 280	320	50	2055
230 x 280	400	50	2057

Abrasive paper

PS 33 C



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○



Advantages: High removal rate - For diverse applications

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	40	50	147849
230 x 280	60	50	147850
230 x 280	80	50	147851
230 x 280	100	50	149719
230 x 280	120	50	147852

Sheets with paper backing

Coated abrasives

Abrasive paper

PS 33 B



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	●

Advantages: High removal rate - For diverse applications

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	150	50	149528
230 x 280	180	50	147853
230 x 280	220	50	149529
230 x 280	240	50	147854
230 x 280	280	50	149793
230 x 280	320	50	149530
230 x 280	400	50	148971
230 x 280	500	50	170667
230 x 280	600	50	170668

Abrasive paper, actively coated

PS 73 BW



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●

Advantages: High quality product for use on varnish, paint and filler - High removal rate - Substantially reduced clogging and significantly longer service life due to additional special coating

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Strips with paper backing

Coated abrasives



Abrasive paper, ANTISTATIC

PS 22 F ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	F-paper

Applications:

Wood	●	Steel	○
Metals	○	NF metals	○
Paint/Varnish/Filler	○		
Plastic	○		

Advantages: Premium product for hardwood - Good edge stability - Reduced clogging due to ACT recipe and antistatic properties

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 280	40	100	6529
115 x 280	60	100	6531
115 x 280	80	100	6532
115 x 280	100	100	6533

Abrasive paper

PS 30 D



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	D-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	○

Advantages: Product with good price-performance ratio - For diverse applications

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 280	60	100	194673
115 x 280	80	100	194674
115 x 280	120	100	194676
115 x 280	240	100	194680

Strips with paper backing

Coated abrasives

Finishing paper

PL 31 B



Properties

Bonding agent	Glue
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	●



Advantages: Product with optimal price-performance ratio - Optimized wear properties for hand-held machine grinding - Very fine surface scratch pattern

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
93 x 230	40		100	2416
93 x 230	60		100	2418
93 x 230	80		100	2419
93 x 230	100		100	2390
93 x 230	120		100	2391
93 x 230	180		100	2393
93 x 230	240		100	2395
93 x 230	60	GL 9	100	2667
93 x 230	80	GL 9	100	2668
93 x 230	120	GL 9	100	2670
115 x 280	40		100	2412
115 x 280	60		100	2414
115 x 280	80		100	2415
115 x 280	100		100	2379
115 x 280	120		100	2380
115 x 280	150		100	2381
115 x 280	180		100	2382
115 x 280	220		100	2383
115 x 280	240		100	2384
115 x 280	60	GL 1	100	5324
115 x 280	80	GL 1	100	5323
115 x 280	120	GL 1	100	5321

Strips with paper backing, self-fastening

Coated abrasives



Abrasive paper, self-fastening

PS 19 EK



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	E-paper

Applications:

Wood	●
Paint/Varnish/Filler	●
Plastic	●
Glass/Stone	●

Advantages: Hard and sharp silicon carbide grain for hard and tough materials - Resistant high-performance product with a stable E-paper backing for rough, intermediate and finish sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

All sizes and minimum purchasing quantities available on request

Abrasive paper, self-fastening

PS 22 K



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	E-paper

Applications:

Wood	●	Steel	○
Metals	●		
Paint/Varnish/Filler	○		
Plastic	○		

Advantages: High removal rate - Uniform scratch pattern

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------








Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
70 x 125	60		100	147593
70 x 125	80		100	140608
70 x 125	100		100	131668
70 x 125	120		100	129801
70 x 125	150		100	135581
70 x 125	180		100	129802
80 x 133	40	GL 18	100	149852
80 x 133	60	GL 18	100	149853
80 x 133	80	GL 18	100	149854
80 x 133	100	GL 18	100	149855
80 x 133	120	GL 18	100	149857
80 x 133	150	GL 18	100	232741
80 x 133	180	GL 18	100	232742



Strips with paper backing, self-fastening

Coated abrasives

►► Continuation of PS 22 K, Abrasive paper, self-fastening

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
80 x 133	220	 GL 18	100	206371
100 x 115	80		100	103378
100 x 115	100		100	103379
100 x 115	120		100	103380
100 x 115	150		100	103381
115 x 115	80		100	82076
115 x 115	120		100	81637
115 x 115	150		100	94721
115 x 230	40	 GL 15	100	122331
115 x 230	60	 GL 15	100	116647
115 x 230	80	 GL 15	100	116648
115 x 230	100	 GL 15	100	116649
115 x 230	120	 GL 15	100	114942
115 x 230	150	 GL 15	100	111500

Abrasive paper, self-fastening

PS 33 CK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper











Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	●

Advantages: High removal rate - For diverse applications

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
70 x 125	80		100	155072
70 x 125	100		100	151786
70 x 125	120		100	151785
80 x 133	40	 GL 18	100	146974
80 x 133	60	 GL 18	100	146975
80 x 133	80	 GL 18	100	146976
80 x 133	100	 GL 18	100	146977
80 x 133	120	 GL 18	100	147169
93 x 178	40	 GL 17	100	146970
93 x 178	60	 GL 17	100	146971
93 x 178	80	 GL 17	100	146972
93 x 178	100	 GL 17	100	146973
93 x 178	120	 GL 17	100	148046
100 x 115	80		100	147101
100 x 115	100		100	147102
100 x 115	120		100	147103



Strips with paper backing, self-fastening

Coated abrasives



► Continuation of PS 33 CK, Abrasive paper, self-fastening

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115 x 230	40	GL 15	100	146966
115 x 230	60	GL 15	100	146967
115 x 230	80	GL 15	100	146968
115 x 230	100	GL 15	100	146969
115 x 230	120	GL 15	100	147182

Abrasive paper, self-fastening

PS 33 BK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	⓪

Advantages: High removal rate - For diverse applications

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
70 x 125	150		100	151784
70 x 125	180		100	148228
70 x 125	220		100	155500
70 x 125	240		100	152381
70 x 125	280		100	197133
80 x 133	150	GL 18	100	149107
80 x 133	180	GL 18	100	147479
80 x 133	220	GL 18	100	149819
80 x 133	240	GL 18	100	148050
80 x 133	320	GL 18	100	149897
80 x 133	400	GL 18	100	149899
93 x 178	150	GL 17	100	149138
93 x 178	180	GL 17	100	148047
93 x 178	240	GL 17	100	148048
100 x 115	150		100	148658
100 x 115	180		100	147104
100 x 115	240		100	147105
115 x 230	150	GL 15	100	149820
115 x 230	180	GL 15	100	147183
115 x 230	240	GL 15	100	147184
115 x 230	320	GL 15	100	147185

Strips with film backing, self-fastening

Coated abrasives

Abrasive film, active coated, self fastening

FP 73 WK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	Film

Applications:

Paint/Varnish/Filler	●
Plastic	○

Advantages: Special product with highly tear-resistant film backing for use on paint, varnish and fillers - Very good adaptation and excellent grit adhesion also in the edge area - Substantially reduced clogging and significantly longer service life

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

All sizes and minimum purchasing quantities available on request

Abrasive film, self fastening

FP 77 K T-ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	Film

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Primer	●	Plastic	○
Filler	●		
Gel coats	●		

Advantages: New high-performance product with optimized clogging behaviour - Increased service life due to the new coating, which prevents the adhesion of paint and dust particles - For fine sanding in the fine grit range 240 - 2000, a highly flexible and completely flat film backing is used for highest surface quality

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
80 x 133	240	GL 18	100	353120
80 x 133	320	GL 18	100	353119
80 x 133	400	GL 18	100	353118

Strips with paper backing, self-fastening / Abrasive screen

Coated abrasives



Abrasive paper, self-fastening

PS 77 CK T-ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Primer	●	Plastic	○
Filler	●		
Gel coats	●		

Advantages: New high-performance product with optimized clogging behaviour - Increased service life due to the new coating, which prevents the adhesion of paint and dust particles - For aggressive grinding at high loads, a flexible and tear-resistant C-latex paper is used in the grit range 60-220

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
80 x 133	60	GL 18	100	353113
80 x 133	80	GL 18	100	353126
80 x 133	100	GL 18	100	353125
80 x 133	120	GL 18	100	353124
80 x 133	150	GL 18	100	353123
80 x 133	180	GL 18	100	353122
80 x 133	220	GL 18	100	353121

Abrasive screen, self-fastening, waterproof

AN 400



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Backing	Polyester screen

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Gel coats	●	Wood	●
Plaster	●	Wood-based materials	●
Plasterboard walls	●		

Advantages: Effective and full-surface dust extraction thanks to open grid structure - Dust-free grinding extends the service life of the abrasive - At the same time, improved health and safety thanks to reduced dust formation at the work station - Independent of existing extraction hole patterns - Waterproof

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
80 x 133	80	50	337892
80 x 133	100	50	337891
80 x 133	120	50	337890
80 x 133	150	50	337894



Abrasive screen / Self-fastening support / Hand block

► Continuation of 400, Abrasive screen, self-fastening, waterproof,

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
80 x 133	180	50	337889
80 x 133	240	50	337893
80 x 133	320	50	337895
80 x 133	400	50	337896

Self-fastening support

CS 396 Y



Properties

Engaging elements	Mushroom heads
Thickness	1,5 mm
Temperature range	-30° to +80°

Advantages: Can be cut to size easily - Simple and safe fixing on smooth and even surfaces - Allows a quick change of the abrasive

All sizes and minimum purchasing quantities available on request

Hand block

HK 100



Advantages: Excellent for flat and slightly convex surfaces - Fatigue-proof hand sanding due to ergonomic form - For strips in 70 x 125 mm - Self-fastening

Width x Length x Height in mm	Packing unit/pcs.	Cat. number
68 x 118 x 40	1	185320

Sheets with cloth backing

Coated abrasives



Abrasive cloth, brown

KL 361 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Steel	●	Stainless steel	●
Metals	●	Plastic	○
NF metals	●		
Wood	●		

Advantages: High-quality universal product - Optimal adaptation to the workpiece due to highly flexible cotton backing - Tears off cleanly and easily

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	30	50	2083
230 x 280	40	50	2084
230 x 280	50	50	2085
230 x 280	60	50	2086
230 x 280	80	50	2087
230 x 280	100	50	2088
230 x 280	120	50	2089
230 x 280	150	50	2090
230 x 280	180	50	2091
230 x 280	220	50	2092
230 x 280	240	50	2093
230 x 280	280	50	2094
230 x 280	320	50	2095
230 x 280	360	50	2096
230 x 280	400	50	2097
230 x 280	500	50	2098
230 x 280	600	50	5334

Sheets with cloth backing

Coated abrasives

Abrasive cloth, blue

KL 371 X



Properties

Bonding agent	Glue
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
NF metals	●

Advantages: Attractively priced universal product for surface hand grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	40	50	2100
230 x 280	50	50	2101
230 x 280	60	50	2102
230 x 280	80	50	2103
230 x 280	100	50	2104
230 x 280	120	50	2105
230 x 280	150	50	2106
230 x 280	180	50	2107
230 x 280	220	50	2108
230 x 280	240	50	2109
230 x 280	280	50	119885
230 x 280	320	50	119886
230 x 280	400	50	119888

Sheets with cloth backing

Coated abrasives



Abrasive cloth, brown

KL 385 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Applications:

Wood	●
Metals	●
NF metals	●
Stainless steel	⓪

Plastic	⓪
---------	---

Advantages: Attractively priced universal product for profile grinding - Optimal adaptation to the workpiece due to highly flexible cotton backing - Tears off cleanly and easily

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------


Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
230 x 280	40	50	218047
230 x 280	60	50	218050
230 x 280	80	50	218051
230 x 280	100	50	218052
230 x 280	120	50	218053
230 x 280	150	50	218054
230 x 280	180	50	218055
230 x 280	220	50	218056
230 x 280	240	50	218057
230 x 280	280	50	218058
230 x 280	320	50	218059
230 x 280	400	50	218061
230 x 280	600	50	218063


Strips with cloth backing

Coated abrasives

Abrasive cloth, brown

KL 361 JF





Properties		Applications:	
Bonding agent	Resin	Steel	●
Grain	Aluminium oxide	Metals	●
Coating	Close	NF metals	●
Backing	JF-cotton	Wood	●
		Stainless steel	●
		Plastic	○

Advantages: High-quality universal product - Optimal adaptation to the workpiece due to highly flexible cotton backing - Tears off cleanly and easily

Available grits:

16

24

30

36

40

50

60

80

100

120

150

180

220

240

280

320

360

400

500

600

800

1000

1200

1500

2000

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
115 x 280	40	100	73953
115 x 280	60	100	74436
115 x 280	80	100	72227
115 x 280	120	100	72488

Abrasive block, flexible, coated on 4 sides

SK 500



Properties

Grain	Aluminium oxide
Coating	Close

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○
Metals	○

Advantages: Can be used flat and upright (four usable sides) - For flat and profiled surfaces due to flexible foam core - Robust, washable and reusable

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length x Height in mm	Grit	Density	Grit color	Foam color	Packing unit/pcs.	Cat. number
70 x 100 x 25	60	hard	brown	gray	100	125279
70 x 100 x 25	80	hard	brown	gray	100	225165
70 x 100 x 25	100	hard	brown	gray	100	125280
70 x 100 x 25	120	hard	brown	gray	100	225166
70 x 100 x 25	180	hard	brown	gray	100	225167
70 x 100 x 25	220	hard	brown	gray	100	225168
70 x 100 x 25	280	hard	brown	gray	100	225169

Abrasive block, flexible, coated on 4 sides

SK 700 A



Properties

Grain	Aluminium oxide
Coating	Close

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○
Metals	○

Advantages: Suitable for flat or upright use on all four sides - The angled edge (approx. 45°) makes it an exceptional choice for narrow, tapering workpiece contours - Excellent contouring and pressure distribution thanks to flexible foam core - Robust, washable and reusable

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length x Height in mm	Grit	Density	Grit color	Foam color	Packing unit/pcs.	Cat. number
89 x 125 x 25	60	hard	brown	gray	100	337846
89 x 125 x 25	80	hard	brown	gray	100	337847
89 x 125 x 25	100	hard	brown	gray	100	337848
89 x 125 x 25	120	hard	brown	gray	100	331019

Abrasive sponge

Abrasive sponge, flexible, coated on 2 sides

SW 501



Properties

Grain	Aluminium oxide
Coating	Close

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○
Metals	○

Advantages: Satin surface scratch pattern - For low and high profiled surfaces (two usable sides) - Crease and break resistant - Washable and reusable

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
Width x Length x Height in mm						Grit	Density	Grit color	Foam color	Packing unit/pcs.	Cat. number													
96 x 123 x 12,5						120	soft	brown	yellow	100	125281													
96 x 123 x 12,5						220	soft	brown	yellow	100	125282													

Abrasive sponge, flexible, coated on 2 sides

SW 501 TR



Properties

Grain	Aluminium oxide
Coating	Close

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○
Metals	○

Advantages: Satin surface scratch pattern - For low and high profiled surfaces (two usable sides) - Crease and break-resistant - Washable and reusable - Extremely tear-resistant - Solvent free bonding with grit size dependent colouring

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
Width x Length x Height in mm						Grit	Density	Grit color		Foam color		Packing unit/pcs.	Cat. number											
96 x 123 x 12,5						100	soft	light brown		yellow		100	351573											
96 x 123 x 12,5						120	soft	green		yellow		100	353264											
96 x 123 x 12,5						150	soft	red		yellow		100	353263											
96 x 123 x 12,5						180	soft	blue		yellow		100	351574											
96 x 123 x 12,5						220	soft	brown		yellow		100	353262											

Abrasive sponge, flexible, coated on 2 sides

SW 502



Properties

Grain	SiC
Coating	Close

Applications:

Paint/Varnish/Filler	●
Plastic	●
Wood	○
Metal	○

Advantages: For low and high profiled surfaces (two usable sides) - Crease and break resistant - Washable and reusable

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length x Height in mm	Grit	Density	Grit color	Foam color	Packing unit/pcs.	Cat. number
96 x 123 x 12,5	120	soft	black	yellow	100	244377
96 x 123 x 12,5	220	soft	black	yellow	100	244379

Abrasive sponge, flexible, coated on 1 side

SW 510



Properties

Grain	Aluminium oxide
Coating	Close

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○
Metals	○

Advantages: Thin, ultra flexible sanding sponge for particularly hard-to-reach areas such as indentations, profiles and edges - Tight foam structure, allowing for exceptionally uniform pressure distribution and an extra fine finish - No bending, no creases - Can be used wet and dry

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length x Height in mm	Grit	Density	Grit color	Foam color	Packing unit/pcs.	Cat. number
115 x 140 x 5	100	hard	white	gray	100	303588
115 x 140 x 5	180	hard	white	gray	100	303589
115 x 140 x 5	220	hard	white	gray	100	303590
115 x 140 x 5	320	hard	white	gray	100	337849

Hole patterns for discs

Klingspor offers a wide range of products with hole patterns for dust extraction.
You will find the available hole patterns marked in the table below.
The chart on the following product pages shows the most popular types of machines and the required hole pattern.

	GLS 4 Ø 115 mm 8 holes Ø 10 mm on hole circle Ø 65 mm		GLS 1 Ø 150 mm 8 holes Ø 10 mm on hole circle Ø 120 mm + 1 centre hole Ø 17 mm		GLS 47 Ø 150 mm 8 holes Ø 9 mm on hole circle Ø 120 mm, 6 holes Ø 9 mm on hole circle Ø 80 mm + 1 centre hole Ø 17 mm
	GLS 5 Ø 125 mm 8 holes Ø 10 mm on hole circle Ø 65 mm		GLS 2 Ø 150 mm 8 holes Ø 10 mm on hole circle Ø 65 mm		GLS 51 Ø 150 mm 8 holes Ø 10 mm on hole circle Ø 120 mm, 8 holes Ø 8 mm on hole circle Ø 65 mm + 1 centre hole Ø 10 mm
	GLS 27 Ø 125 mm 8 holes Ø 10 mm on hole circle Ø 90 mm + 1 centre hole Ø 10 mm		GLS 3 Ø 150 mm 6 holes Ø 10 mm on hole circle Ø 80 mm		GLS 74 Ø 150 mm 8 holes Ø 9,5 mm on hole circle Ø 119 mm, 16 holes Ø 6 mm on hole circle Ø 119 mm 8 holes Ø 7 mm on hole circle Ø 95 mm 8 holes Ø 8,5 mm on hole circle Ø 65 mm 8 holes Ø 6 mm on hole circle Ø 39 mm + 1 centre hole Ø 10 mm
	Shape 0 no hole different dimensions		GLS 15 Triangular Ø 96 mm 6 holes Ø 8 mm on hole circle Ø 52 mm		GLS 52 Ø 225 mm 10 holes Ø 12 mm on hole circle Ø 105 mm
	Shape 10 round hole different dimensions		GLS 24 98 x 148 mm 7 holes Ø 10 mm		
	Shape 30 star-shaped hole different dimensions				

Other hole patterns available on request.

Minimum order quantities for made to order items

Type	Ø [mm]	Minimum order quantities
AN 400	up to 50 mm	5,000 pieces
CS 310 X	up to 90 mm	2,500 pieces
CS 321 X	up to 125 mm	1,000 pieces
CS 411 XK	up to 200 mm	500 pieces
FP 73 WK	up to 400 mm	200 pieces
PS 11 C	up to 600 mm	100 pieces
PS 19 EK	over 600 mm	25 pieces
PS 21 FK		
PS 22 F ACT		
PS 22 K		
PS 33 BK/CK		
PS 61 FK		
PS 73 BWK/CWK		
PS 77 CK		
FP 77 K		

Maximum disc diameter

Ø 670 mm	Ø 770 mm	Ø 1,100 mm
PS 21 FK	PS 61 FK	PS 11 C
PS 22 K		PS 19 EK
		PS 33 BK/CK
		FP 73 WK
		PS 73 BWK/CWK
		AN 400
		CS 411 XK
		CS 310 X
		CS 321 X
		PS 77 CK
		FP 77 K



We reserve the right to over-deliver or under-deliver made to order items.

Orbital and delta sanders

Manufacturer	Type	Size in mm	Hole pattern
AEG powertools	Delta DSE 260	105 × 105 × 105	GLS 17
	FS 2 D	98 × 148	GLS 24
	EX 400, EXE 400, EX 450, EXE 460-125, EX 125 E, EX 125 ES	125	GLS 5
	EXE 450	convertible to 125	GLS 5
	EXE 450	150	GLS 2 (7)
	EXE 460 - 150, ROS 150 E, EX 150 E	150	GLS 3
Atlas Copco	EX/E 450	150	GLS 7
	LST 21 R350, LST 22 R350, LST 22 R325, LST 20 R350	90	GLS 41
	VS 11 D	98 × 148	GLS 24
	LST 30 H90-11	115	plain
	LST 20 R525, LST 20 R550	125	plain
	LST 21 R525, LST 21 R550, LST 22 R525, LST 22 R550	125	GLS 5
	TXE 150	convertible to 125	GLS 5
	LST 20 R625, LST 20 R650, LST 30 H090-15, LST 30 S090-15	150	plain
	ROS 150 E, LST 21 R625, LST 21 R650, LST 22 R625, LST 22 R650, LST31 H90-15, LST31 S90-15, LST32 H090-15, LST32 S090-15, LST 22 R625-9, G2438-6.5N Pro, G2438-6.5I Pro, G2438-6.3I Pro, G2438-6.10I Pro, G2438-6.5C Pro, G2438-6.3N Pro, G2438-6.3C Pro, G2438-6.10N Pro, G2438-6.10C Pro, G2438-10 self-fastening 6 Pro, LST 22 R650-9	150	GLS 3
	TXE 150	150	GLS 7
Black & Decker	VP510	96 × 96 × 96	GLS 15
	KA 510	94 × 94 × 94	GLS 15
	KA 165 GT (mouse)		GLS 25
	KA 230 E		GLS 34
	BD190, BD190 E, BD190S, BD190D, XTA90EK, KS 191 EK, KA 198, KA 190, KA 190 E, KA 190 S, KA 198GT, KA220, KA220G, KA191EK	125	GLS 5
Bosch	Delta GDA 280 E, Delta PDA 100, PDA 10-92, Delta PDA 120 E, Delta PDA 240 E, PDA 180, PDA 180 E	96 × 96 × 96	GLS 15
	PEX 11 A, PEX 115, PEX 11 AE	115	GLS 4
	PEX 300 A/AE, GEX 125-150 AVE Professional, PEX 400 AE, PEX 12 A, PEX 12 AE, PEX 125 A-1, PEX 125 AE, PEX 270 A/AE, GEX 125 A, GEX 125 AC, GEX 125-1 AE, PEX 220 A	125	GLS 5
	PEX 15 AE, GEX 150 AE, GEX 150 AC/E, GEX 150 Turbo, PEX 420 AE	150	GLS 3
	ES 55 E, DW423, D26453	125	GLS 5
DeWalt	ES 56 E, ES 56 EK, DW443, D 26410	150	GLS 3
	DE-G 200 E	94 × 94 × 94	GLS 15
Einhell	EX 115	115	GLS 4
	EX-G 125 E, BES 125, EX-G 125, BT-RS 420 E, BES 125 E, BRS 380 E	125	GLS 5
	LL 107 VEA	115	plain
	MSf 636-1, M 10000-5, XS 712	125	GLS 5
Fein	MSf 636-1	150	GLS 26
	MSf 649-2 a/b, M 10000-6	150	GLS 2 (7)
	ROT 14-200 E	150	GLS 2
	X 1107 VE	150	GLS 3
	ROT 14-200 E	200	GLS 9
Felisatti	TP 521/AS, TP 521/E, TP 522 AS/CE, RGF 150/600 E	150	GLS 3

Manufacturer	Type	Size in mm	Hole pattern
Festool	RO 90 DX FEQ-Plus	90	GLS 41
	DS 400, DTS 400	98 × 148	GLS 24
	DX 93	94 × 94 × 94	GLS 16
	ES 125, ES 125 E, ES 125 E-PLUS, ES 125 PLUS	125	GLS 5
	ES 125 EQ-Plus; ES 125 EQ, ES 125 Q-Plus, ES 125 Q, ETS 125, LEX 2 125/3, LEX 1 125/7, LEX 3 125/3, LEX 3 125/5	125	GLS 27
	RO 125 FEQ-Plus	125	GLS 27
Flex	ET 2 E	150	GLS 2
	ET 2 E - Plus, RO 150, RO 150 E, RO 2 E-Plus, LEX 3 150/3, LEX 150, ETS 150/3, ETS 150/5, WTS 150/7 E, WTS 150/7 E-Plus, ETS 150/5 EQ, ETS 150/5 EQ-E, ETS 150/5 EQ-Plus	150	GLS 1
	Multi-Jetstream (8+8+1)	150	GLS 51
	LHS 225 EQ-Plus	225	GLS 38
	OD 100-2, ODE 100-2	98 × 148	GLS 24
Hilti	XS 712, XS 713	125	GLS 5
	X 1107 VE, XS 1107 VE	150	GLS 3
	ORE 125-2	125	GLS 27
	GE 5, GE 5 R, GE 7, GSE 5 R, WST 700VV, WST 700 VV Plus	225	GLS 52
	GE 7	225	GLS 55
Hitachi	GE 7, WST 700 VV Plus	285	GLS 60
	WFE 150, WFE 380, WFE 450 E	150	GLS 3
Hitachi	FSV 13 Y, TSV 13 Y, SV 13 YA	125	GLS 5
Holz HER	SAY 150 A	150	GLS 3
Kress	2445	150	GLS 7 (1)
	CDS 6425, CDS 6420, CDS 6422 E	105	GLS 17
	CPS 6115-1, 6115 E	115	GLS 4
	CPS 6125-1, CPS 6125 E, CPS 6125 E SET, HEX 1385 E, HEX 6385 E, 300 EXE	125	GLS 5
	900 MPS, 900 HEX /2	150	GLS 3
Mafell	UT 150 E, UX 150 E	150	GLS 1, 3, 47
Makita	BO 4561, BO 4565	96 × 96 × 96	GLS 15
	BO 5000, BO 5010, BO 5041, BO 5031 K, BO 5021, BO 5021 K, BO 5041 K	125	GLS 5
	BO 6030, BO 6040 J	150	GLS 1
Metabo	DS E 130, DS E 170, DS E 180	96 × 96 × 96	GLS 15
	DSE 300, DSE 300 Intec, DSE 280 INTEC	94 × 94 × 94	GLS 15
	SXE 400	80	GLS 13
	SX E 125, FSX 200 INTEC, SXE 425 TURBOTEC, SX E 425, SXE 325 INTEC	125	GLS 5
	SX E 425 XL, SX E 450 Duo, SXE 450 TURBOTEC,	150	GLS 3
Milwaukee	PDS 13, FS 2 D	98 × 148	GLS 24
	PRS 125 E	125	GLS 5
	ROS 150 E	150	GLS 3
Peugeot	PAE 115	115	GLS 4
	PRX 150 E	150	GLS 3
Pro Tool	ESP 150 E	150	GLS 3
Ryobi	ERO 2412V, CRO 180M, ROS 300 A, CRO 180 MHG	125	GLS 5
SKIL	7110 AA, 7115 AA	96 × 96 × 96	GLS 15
	7415	115	GLS 4
	7400, 7425, 7430, 7435, 7440 AA, 7460 AA, 7470 MA	125	GLS 5
Stayer	RO 150 E, LRT 150	150	GLS 3
Wegoma	LRE 84 H, RTE84H	125	GLS 5
	RX 91 C, RT188N, RTE46L, RTE146L	150	GLS 3


Please contact Klingspor if you cannot find the machine used by you on this list. We will be pleased to assist you further. If the product you require is not in stock, we will manufacture it for you subject to a minimum order quantity.


Discs with paper backing

Coated abrasives

Abrasive paper, waterproof

PS 11 C





Properties		Applications:	
Bonding agent	Resin	Paint/Varnish/Filler	●
Grain	SiC	Metals	●
Coating	Close	Glass/Stone	○
Backing	C-paper	Plastic	○

Advantages: Special product for auto repair and painting - Ideal for hard and tough surfaces - Excellent adaptation of the disc while maintaining high stability - Can be used for wet and dry grinding

Available grits:

- 16
- 24
- 30
- 36
- 40
- 50
- 60
- 80
- 100
- 120
- 150
- 180
- 220
- 240
- 280
- 320
- 360
- 400
- 500
- 600
- 800
- 1000
- 1200
- 1500
- 2000

All sizes and minimum purchasing quantities available on request

Discs with paper backing, self-fastening

Coated abrasives



Abrasive paper, self-fastening

PS 19 EK



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	E-paper

Applications:

Wood	●
Paint/Varnish/Filler	●
Plastic	●
Glass/Stone	●

Advantages: Hard and sharp silicon carbide grain for hard and tough materials - Resistant high-performance disc with a stable E-paper backing for rough, intermediate and finish sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115	40	○ 0	50	287798
115	60	○ 0	50	300290
115	80	○ 0	50	305763
115	100	○ 0	50	311087
115	120	○ 0	50	300291
115	220	○ 0	50	309073
115	320	○ 0	50	321743
115	400	○ 0	50	321744
115	600	○ 0	50	322637

Abrasive paper, self-fastening

PS 21 FK



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	F-paper

Applications:

Steel	●
Stainless steel	●
Metals	●

Advantages: Aggressive abrasive behavior due to self-sharpening zirconia alumina - Optimal recipe for rough grinding and finish grinding of stainless steel - Long service life

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115	40	○ 0	50	237224
115	60	○ 0	50	248808
115	80	○ 0	50	249326
115	120	○ 0	50	249327



Discs with paper backing, self-fastening

Coated abrasives

►► Continuation of PS 21 FK, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115	150	○ 0	50	248809
115	240	○ 0	50	255347
125	40	○ 0	50	246857
125	60	○ 0	50	237780
125	80	○ 0	50	237781
125	120	○ 0	50	237782
125	150	○ 0	50	255348
125	240	○ 0	50	237785
150	40	○ 0	50	230312
150	60	○ 0	50	230313
150	80	○ 0	50	230314
150	120	○ 0	50	246488
150	150	○ 0	50	239244
150	240	○ 0	50	251509

Abrasive paper, self-fastening

PS 22 K



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	E-paper

Applications:

Wood	●	Plastic	①
Metals	●		
Stainless steel	①		
Paint/Varnish/Filler	①		



Advantages: Universal abrasive disc for metalworking and woodworking - Uniform surface scratch pattern - Available in many grit sizes and dimensions

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
96	40	△ GLS 15	50	142134
96	60	△ GLS 15	50	142135
96	80	△ GLS 15	50	142136
96	100	△ GLS 15	50	145055
96	120	△ GLS 15	50	142137
96	150	△ GLS 15	50	146336
96	180	△ GLS 15	50	142138
96	240	△ GLS 15	50	142139

Discs with paper backing, self-fastening

Coated abrasives



Abrasive paper, self-fastening

PS 22 K



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	E-paper

Applications:

Wood	●
Metals	●
Stainless steel	⦿
Paint/Varnish/Filler	⦿

Plastic



Advantages: Universal abrasive disc for metalworking and woodworking - Uniform surface scratch pattern - Available in many grit sizes and dimensions

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115	24	○ 0	50	6754
115	40	○ 0	50	2785
115	60	○ 0	50	2786
115	80	○ 0	50	6756
115	100	○ 0	50	2787
115	120	○ 0	50	6757
115	150	○ 0	50	80046
115	180	○ 0	50	2788
115	220	○ 0	50	88330
115	240	○ 0	50	88333
115	320	○ 0	50	95561
115	400	○ 0	50	111470
115	40	⊗ GLS 4	50	82938
115	60	⊗ GLS 4	50	82940
115	80	⊗ GLS 4	50	82941
115	100	⊗ GLS 4	50	82942
115	120	⊗ GLS 4	50	82944
115	180	⊗ GLS 4	50	82946
115	240	⊗ GLS 4	50	87424
125	24	○ 0	50	7300
125	40	○ 0	50	2294
125	60	○ 0	50	2295
125	80	○ 0	50	6774
125	100	○ 0	50	2296
125	120	○ 0	50	6775
125	150	○ 0	50	78163
125	180	○ 0	50	62107
125	220	○ 0	50	97176
125	240	○ 0	50	91922
125	320	○ 0	50	93284
125	400	○ 0	50	130114
125	24	⊗ GLS 5	50	89485
125	40	⊗ GLS 5	50	89486
125	60	⊗ GLS 5	50	89488



Discs with paper backing, self-fastening

Coated abrasives

►► Continuation of PS 22 K, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125	80	⊗ GLS 5	50	89489
125	100	⊗ GLS 5	50	89491
125	120	⊗ GLS 5	50	89493
125	150	⊗ GLS 5	50	89494
125	180	⊗ GLS 5	50	89495
125	220	⊗ GLS 5	50	90758
125	240	⊗ GLS 5	50	92753
125	320	⊗ GLS 5	50	89496
125	400	⊗ GLS 5	50	104778
125	40	⊗ GLS 27	50	260795
125	60	⊗ GLS 27	50	260796
125	80	⊗ GLS 27	50	260797
125	100	⊗ GLS 27	50	260798
125	120	⊗ GLS 27	50	260799
125	150	⊗ GLS 27	50	260800
125	180	⊗ GLS 27	50	260801
125	240	⊗ GLS 27	50	260802
150	24	○ 0	50	2474
150	40	○ 0	50	20207
150	60	○ 0	50	6649
150	80	○ 0	50	6936
150	100	○ 0	50	6697
150	120	○ 0	50	6937
150	150	○ 0	50	71140
150	180	○ 0	50	4022
150	220	○ 0	50	93324
150	240	○ 0	50	91605
150	320	○ 0	50	91721
150	400	○ 0	50	129092
150	24	⊗ GLS 1	50	6516
150	40	⊗ GLS 1	50	6520
150	60	⊗ GLS 1	50	6523
150	80	⊗ GLS 1	50	6524
150	100	⊗ GLS 1	50	6525
150	120	⊗ GLS 1	50	6526
150	150	⊗ GLS 1	50	80722
150	180	⊗ GLS 1	50	6611
150	220	⊗ GLS 1	50	98990
150	240	⊗ GLS 1	50	89451
150	320	⊗ GLS 1	50	89450
150	400	⊗ GLS 1	50	129389
150	40	⊗ GLS 2	50	74088
150	60	⊗ GLS 2	50	72633
150	80	⊗ GLS 2	50	72632
150	100	⊗ GLS 2	50	73490
150	120	⊗ GLS 2	50	72628
150	150	⊗ GLS 2	50	79862
150	180	⊗ GLS 2	50	72624
150	240	⊗ GLS 2	50	91814
150	24	⊗ GLS 3	50	93321
150	40	⊗ GLS 3	50	89181



Discs with paper backing, self-fastening

Coated abrasives



►► Continuation of PS 22 K, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	60	⊙ GLS 3	50	86634
150	80	⊙ GLS 3	50	86635
150	100	⊙ GLS 3	50	97072
150	120	⊙ GLS 3	50	86636
150	150	⊙ GLS 3	50	86637
150	180	⊙ GLS 3	50	87528
150	220	⊙ GLS 3	50	100157
150	240	⊙ GLS 3	50	97778
150	320	⊙ GLS 3	50	97779
150	400	⊙ GLS 3	50	128356
150	40	⊗ GLS 51	50	306611
150	60	⊗ GLS 51	50	306612
150	80	⊗ GLS 51	50	305559
150	100	⊗ GLS 51	50	306507
150	120	⊗ GLS 51	50	305560
150	150	⊗ GLS 51	50	306508
150	180	⊗ GLS 51	50	306509
150	240	⊗ GLS 51	50	309471
150	40	⊗ GLS 74	50	342419
150	60	⊗ GLS 74	50	342418
150	80	⊗ GLS 74	50	340766
150	100	⊗ GLS 74	50	342423
150	120	⊗ GLS 74	50	342159
150	150	⊗ GLS 74	50	342422
150	180	⊗ GLS 74	50	342421
150	240	⊗ GLS 74	50	340761
180	24	○ 0	50	2782
180	40	○ 0	50	2476
180	60	○ 0	50	2477
180	80	○ 0	50	6914
180	100	○ 0	50	2783
180	120	○ 0	50	6915
200	40	○ 0	50	77659
200	60	○ 0	50	77660
200	80	○ 0	50	77656
200	100	○ 0	50	77658
200	120	○ 0	50	77661

Discs with paper backing, self-fastening

Coated abrasives

Abrasive paper, self-fastening

PS 33 CK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	⦿

Advantages: High removal rate - For diverse applications

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
96	40	△ GLS 15	100	147163
96	60	△ GLS 15	100	147164
96	80	△ GLS 15	100	147165
96	100	△ GLS 15	100	147166
96	120	△ GLS 15	100	148195

Abrasive paper, self-fastening

PS 33 CK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	⦿

Advantages: High removal rate - For diverse applications

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
98 x 148	60	△ GLS 24	100	215473
98 x 148	80	△ GLS 24	100	215474
98 x 148	100	△ GLS 24	100	215475
98 x 148	120	△ GLS 24	100	215476

Discs with paper backing, self-fastening

Coated abrasives



Abrasive paper, self-fastening

PS 33 CK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○



Advantages: High removal rate - For diverse applications

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115	40	○ 0	100	147701
115	60	○ 0	100	148469
115	80	○ 0	100	147144
115	120	○ 0	100	146955
125	40	○ 0	100	154113
125	60	○ 0	100	147604
125	80	○ 0	100	149055
125	100	○ 0	100	150431
125	120	○ 0	100	150433
125	40	⊗ GLS 5	100	146954
125	60	⊗ GLS 5	100	147642
125	80	⊗ GLS 5	100	147643
125	100	⊗ GLS 5	100	147977
125	120	⊗ GLS 5	100	147170
150	40	○ 0	100	147922
150	60	○ 0	100	147107
150	80	○ 0	100	146739
150	100	○ 0	100	147106
150	120	○ 0	100	146740
150	40	⊗ GLS 1	100	146978
150	60	⊗ GLS 1	100	146979
150	80	⊗ GLS 1	100	143130
150	100	⊗ GLS 1	100	143131
150	120	⊗ GLS 1	100	147093
150	60	⊗ GLS 2	100	147226
150	80	⊗ GLS 2	100	143132
150	100	⊗ GLS 2	100	143133
150	120	⊗ GLS 2	100	147225
150	40	⊗ GLS 3	100	147647
150	60	⊗ GLS 3	100	147124
150	80	⊗ GLS 3	100	146946
150	100	⊗ GLS 3	100	143694
150	120	⊗ GLS 3	100	146947
150	40	⊗ GLS 51	100	310531



Discs with paper backing, self-fastening

Coated abrasives

►► Continuation of PS 33 CK, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	60	⊗ GLS 51	100	301874
150	80	⊗ GLS 51	100	301925
150	100	⊗ GLS 51	100	301926
150	120	⊗ GLS 51	100	301927
150	40	⊗ GLS 74	100	340853
150	60	⊗ GLS 74	100	340370
150	80	⊗ GLS 74	100	340371
150	100	⊗ GLS 74	100	342046
150	120	⊗ GLS 74	100	340375
225	40	○ 0	50	223162
225	60	○ 0	50	210124
225	80	○ 0	50	210129
225	100	○ 0	50	224731
225	120	○ 0	50	210130
225	40	⊗ GLS 52	50	302042
225	60	⊗ GLS 52	50	302043
225	80	⊗ GLS 52	50	302044
225	100	⊗ GLS 52	50	302045
225	120	⊗ GLS 52	50	302046

Abrasive paper, self-fastening

PS 33 BK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	○



Advantages: High removal rate - For diverse applications

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125	150	⊗ GLS 5	100	150760
125	180	⊗ GLS 5	100	147837
125	240	⊗ GLS 5	100	147838
150	150	○ 0	100	148375
150	180	○ 0	100	146958
150	220	○ 0	100	149916
150	240	○ 0	100	146959
150	320	○ 0	100	146716
150	400	○ 0	100	147108
150	150	⊗ GLS 1	100	148379
150	180	⊗ GLS 1	100	147095



Discs with paper backing, self-fastening

Coated abrasives



►► Continuation of PS 33 BK, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	220	⊙ GLS 1	100	149794
150	240	⊙ GLS 1	100	147094
150	320	⊙ GLS 1	100	147096
150	400	⊙ GLS 1	100	147097
150	150	⊙ GLS 2	100	148377
150	180	⊙ GLS 2	100	147224
150	240	⊙ GLS 2	100	147280
150	150	⊙ GLS 3	100	149151
150	180	⊙ GLS 3	100	146948
150	220	⊙ GLS 3	100	149255
150	240	⊙ GLS 3	100	146907
150	320	⊙ GLS 3	100	147126
150	400	⊙ GLS 3	100	147125
150	150	⊙ GLS 51	100	301928
150	180	⊙ GLS 51	100	304084
150	220	⊙ GLS 51	100	301929
150	240	⊙ GLS 51	100	304815
150	320	⊙ GLS 51	100	301930
150	400	⊙ GLS 51	100	310898
150	150	⊙ GLS 74	100	342045
150	180	⊙ GLS 74	100	340598
150	220	⊙ GLS 74	100	342044
150	240	⊙ GLS 74	100	340599
150	320	⊙ GLS 74	100	342043
150	400	⊙ GLS 74	100	342042
225	220	⊙ GLS 52	50	302049

Abrasive paper, self-fastening

PS 61 FK



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close
Backing	F-paper

Applications:

Stainless steel	●
Steel	●
Wood	○

Advantages: Continuously aggressive abrasive performance - High-performance abrasive disc for stainless steel grinding - Also very good results in repair grinding of parquet flooring

Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125	60	○ 0	50	322468
125	80	○ 0	50	321597
125	120	○ 0	50	322469
125	150	○ 0	50	322470



Discs with paper / film backing, self-fastening

Coated abrasives

► Continuation of PS 61 FK, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125	180	○ 0	50	322471
150	60	○ 0	50	322036
150	80	○ 0	50	321325
150	120	○ 0	50	322472
150	180	○ 0	50	321797

Abrasive film, active coated, self fastening

FP 73 WK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	Film

Applications:

Paint/Varnish/Filler	●
Plastic	●



Advantages: Special product with highly tear-resistant film backing for use on paint, varnish and fillers - Very good adaptation of the discs with excellent grit adhesion also in the edge area - Substantially reduced clogging and significantly longer service life

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	80	⊗ GLS 47	100	320641
150	100	⊗ GLS 47	100	320642
150	120	⊗ GLS 47	100	320643
150	150	⊗ GLS 47	100	320644
150	180	⊗ GLS 47	100	320725
150	240	⊗ GLS 47	100	320726
150	320	⊗ GLS 47	100	320727
150	400	⊗ GLS 47	100	320728
150	600	⊗ GLS 47	100	320729
150	800	⊗ GLS 47	100	320730
150	1000	⊗ GLS 47	100	320731
150	1200	⊗ GLS 47	100	320732
150	1500	⊗ GLS 47	100	320733

Discs with paper backing, self-fastening

Coated abrasives



Abrasive paper, actively coated,
self-fastening

PS 73 CWK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Plastic	○

Advantages: High-quality product for use on varnish, paint and filler - High removal rate - Substantially reduced clogging and significantly longer service life due to additional special coating

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	40	○ 0	100	301231
150	60	○ 0	100	301232
150	80	○ 0	100	301233
150	100	○ 0	100	301234
150	120	○ 0	100	301235
150	40	⊗ GLS 1	100	301205
150	60	⊗ GLS 1	100	301206
150	80	⊗ GLS 1	100	301207
150	120	⊗ GLS 1	100	301209
150	40	⊗ GLS 3	100	301218
150	60	⊗ GLS 3	100	301219
150	80	⊗ GLS 3	100	301220
150	100	⊗ GLS 3	100	301221
150	120	⊗ GLS 3	100	301222
150	40	⊗ GLS 47	100	301810
150	60	⊗ GLS 47	100	301811
150	80	⊗ GLS 47	100	301812
150	100	⊗ GLS 47	100	301813
150	120	⊗ GLS 47	100	301814
150	80	⊗ GLS 51	100	310524
150	120	⊗ GLS 51	100	310478

Discs with paper backing, self-fastening

Coated abrasives

Abrasive paper, actively coated,
self-fastening

PS 73 BWK



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Plastic	○

Advantages: High-quality product for use on varnish, paint and filler - High removal rate - Substantially reduced clogging and significantly longer service life due to additional special coating

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	150	○ 0	100	301236
150	180	○ 0	100	301237
150	220	○ 0	100	301238
150	240	○ 0	100	301239
150	320	○ 0	100	301240
150	400	○ 0	100	301241
150	500	○ 0	100	301937
150	800	○ 0	100	301886
150	1000	○ 0	100	301891
150	150	⊗ GLS 1	100	301210
150	180	⊗ GLS 1	100	301211
150	240	⊗ GLS 1	100	301213
150	320	⊗ GLS 1	100	301214
150	400	⊗ GLS 1	100	301215
150	500	⊗ GLS 1	100	301216
150	600	⊗ GLS 1	100	301217
150	800	⊗ GLS 1	100	301890
150	150	⊙ GLS 3	100	301223
150	180	⊙ GLS 3	100	301224
150	220	⊙ GLS 3	100	301225
150	240	⊙ GLS 3	100	301226
150	320	⊙ GLS 3	100	301227
150	400	⊙ GLS 3	100	301228
150	500	⊙ GLS 3	100	301229
150	600	⊙ GLS 3	100	301230
150	800	⊙ GLS 3	100	301889
150	150	⊗ GLS 47	100	301855
150	180	⊗ GLS 47	100	301856
150	220	⊗ GLS 47	100	301857
150	240	⊗ GLS 47	100	301858
150	320	⊗ GLS 47	100	301859
150	400	⊗ GLS 47	100	301860
150	500	⊗ GLS 47	100	301861
150	600	⊗ GLS 47	100	301862



Discs with paper / film backing, self-fastening

Coated abrasives



►► Continuation of PS 73 BWK, Abrasive paper, actively coated, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	180	⊗ GLS 51	100	310525
150	220	⊗ GLS 51	100	310526
150	240	⊗ GLS 51	100	309093
150	320	⊗ GLS 51	100	309094
150	400	⊗ GLS 51	100	310527

Abrasive film, self fastening

FP 77 K T-ACT




Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	Film

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Primer	●	Plastic	○
Filler	●		
Gel coats	●		



Advantages: New high-performance disc with optimized clogging behaviour - Increased service life due to the new coating, which prevents the adhesion of paint and dust particles - For fine sanding in the fine grit range 240 - 2000, a highly flexible and completely flat film backing is used for highest surface quality

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125	240	○ 0	100	353177
125	320	○ 0	100	353175
125	400	○ 0	100	353174
125	500	○ 0	100	353173
125	600	○ 0	100	353172
125	240	⊗ GLS 27	100	353168
125	320	⊗ GLS 27	100	353166
125	400	⊗ GLS 27	100	353165
125	500	⊗ GLS 27	100	353164
125	600	⊗ GLS 27	100	353163
125	240	⊗ GLS 5	100	353162
125	280	⊗ GLS 5	100	353161
125	320	⊗ GLS 5	100	353169
125	400	⊗ GLS 5	100	353160
125	500	⊗ GLS 5	100	353159
125	600	⊗ GLS 5	100	353158
150	240	○ 0	100	353157
150	320	○ 0	100	353156
150	400	○ 0	100	353155
150	600	○ 0	100	353153
150	240	⊗ GLS 1	100	353152
150	320	⊗ GLS 1	100	353151
150	400	⊗ GLS 1	100	353150
150	500	⊗ GLS 1	100	353149
150	600	⊗ GLS 1	100	353148



Discs with paper / film backing, self-fastening

Coated abrasives

►► Continuation of ,

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	800	⊙ GLS 1	100	353147
150	240	⊙ GLS 3	100	353146
150	320	⊙ GLS 3	100	353145
150	400	⊙ GLS 3	100	353144
150	500	⊙ GLS 3	100	353143
150	600	⊙ GLS 3	100	353142
150	240	⊗ GLS 47	100	353141
150	320	⊗ GLS 47	100	353138
150	360	⊗ GLS 47	100	353137
150	400	⊗ GLS 47	100	353136
150	500	⊗ GLS 47	100	353135
150	600	⊗ GLS 47	100	353140
150	800	⊗ GLS 47	100	353134
150	1000	⊗ GLS 47	100	353133
150	1200	⊗ GLS 47	100	353132
150	1500	⊗ GLS 47	100	353131
150	2000	⊗ GLS 47	100	353130
150	240	⊗ GLS 51	100	353129
150	320	⊗ GLS 51	100	353128
150	400	⊗ GLS 51	100	353127

Abrasive paper, self-fastening

PS 77 CK T-ACT



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Primer	●	Plastic	①
Filler	●		
Gel coats	●		

Advantages: New high-performance disc with optimized clogging behaviour - Increased service life due to the new coating, which prevents the adhesion of paint and dust particles - For aggressive grinding at high loads, a flexible and tear-resistant C-latex paper is used in the grit range 60-220

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
98 x 148	60	⊙ GLS 24	100	353117
98 x 148	80	⊙ GLS 24	100	353116
98 x 148	100	⊙ GLS 24	100	353115
98 x 148	120	⊙ GLS 24	100	353114
98 x 148	180	⊙ GLS 24	100	353112

Discs with paper backing, self-fastening

Coated abrasives



Abrasive paper, self-fastening

PS 77 CK T-ACT




Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Primer	●	Plastic	○
Filler	●		
Gel coats	●		



Advantages: New high-performance disc with optimized clogging behaviour - Increased service life due to the new coating, which prevents the adhesion of paint and dust particles - For aggressive grinding at high loads, a flexible and tear-resistant C-latex paper is used in the grit range 60-220

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125	60	○ 0	100	353219
125	80	○ 0	100	353224
125	100	○ 0	100	353221
125	120	○ 0	100	353223
125	150	○ 0	100	353225
125	180	○ 0	100	353222
125	220	○ 0	100	353218
125	60	⊗ GLS 27	100	353220
125	80	⊗ GLS 27	100	353235
125	100	⊗ GLS 27	100	353234
125	120	⊗ GLS 27	100	353233
125	150	⊗ GLS 27	100	353232
125	180	⊗ GLS 27	100	353231
125	220	⊗ GLS 27	100	353211
125	60	⊗ GLS 5	100	353217
125	80	⊗ GLS 5	100	353216
125	100	⊗ GLS 5	100	353215
125	120	⊗ GLS 5	100	353214
125	150	⊗ GLS 5	100	353213
125	180	⊗ GLS 5	100	353212
125	220	⊗ GLS 5	100	353209
150	60	○ 0	100	353208
150	80	○ 0	100	353207
150	100	○ 0	100	353210
150	120	○ 0	100	353206
150	150	○ 0	100	353205
150	180	○ 0	100	353204
150	220	○ 0	100	353203
150	60	⊗ GLS 1	100	353202
150	80	⊗ GLS 1	100	353201
150	100	⊗ GLS 1	100	353200
150	120	⊗ GLS 1	100	353199
150	150	⊗ GLS 1	100	353198
150	180	⊗ GLS 1	100	353197



Discs with paper backing, self-fastening / Abrasive screen


Coated abrasives

►► Continuation of PS 77 CK T-ACT, Abrasive paper, self-fastening

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
150	220	⊗ GLS 1	100	353196
150	60	⊗ GLS 3	100	353195
150	80	⊗ GLS 3	100	353194
150	100	⊗ GLS 3	100	353193
150	120	⊗ GLS 3	100	353192
150	150	⊗ GLS 3	100	353191
150	180	⊗ GLS 3	100	353190
150	220	⊗ GLS 3	100	353189
150	60	⊗ GLS 47	100	353188
150	80	⊗ GLS 47	100	353187
150	100	⊗ GLS 47	100	353186
150	120	⊗ GLS 47	100	353185
150	150	⊗ GLS 47	100	353182
150	180	⊗ GLS 47	100	353181
150	220	⊗ GLS 47	100	353180
150	80	⊗ GLS 51	100	353184
150	100	⊗ GLS 51	100	353179
150	120	⊗ GLS 51	100	353183
150	180	⊗ GLS 51	100	353178

Abrasive screen, self-fastening, waterproof

AN 400



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Backing	Polyester screen

Applications:

Paint/Varnish/Filler	●	Composite materials	●
Gel coats	●	Wood	●
Plaster	●	Wood-based materials	●
Plasterboard walls	●		

Advantages: Effective and full-surface dust extraction thanks to open grid structure - Dust-free grinding extends the service life of the abrasive - At the same time, improved health and safety thanks to reduced dust formation at the work station - Independent of existing extraction hole patterns - Waterproof

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Packing unit/pcs.	Cat. number
125	80	50	337898
125	100	50	337899
125	120	50	337900
125	150	50	337901
125	180	50	337905
125	240	50	337904
125	320	50	337903
125	400	50	337902
150	80	50	337886
150	100	50	337887
150	120	50	337885



►► Continuation of AN 400, Abrasive screen, self-fastening, waterproof


Diameter in mm	Grit	Packing unit/pcs.	Cat. number
150	150	50	337884
150	180	50	337883
150	240	50	337888
150	320	50	337876
150	400	50	337877
225	80	25	337871
225	100	25	337875
225	120	25	337873
225	150	25	337874
225	180	25	337872
225	240	25	337878

Protection pad, self-fastening

PP 555



NEW !




Advantages: Improvement of adhesion and protection of the backing pad on random orbital sanders

Diameter in mm	Suitable for	Packing unit/pcs.	Cat. number
150	Random orbital sander	2	358148

Disc with foam material, self-fastening / Backing pads

Grinding disc with foam material,
self-fastening

FD 500

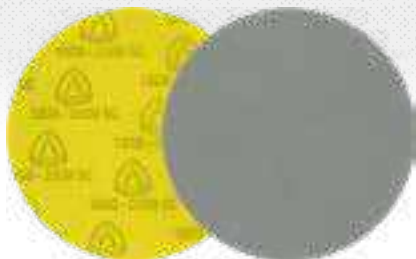

Properties

Bonding agent	Resin
Grain	Aluminium oxide/SiC
Backing	Foam material/ velours

Applications:

Paint/Varnish/Filler	●
----------------------	---

Advantages: Uniform pressure distribution thanks to elastic foam coating - Soft grinding and extremely fine scratch pattern - Superior flexibility and adaptability on contours and profiles - Exceptionally well suited for finish grinding - Suitable for wet and dry use - Available in grit 1000, 1500 (Aluminium oxide) and 2000, 3000 (SiC)

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
125	1000	○ 0	10	342291
125	1500	○ 0	10	342290
125	2000	○ 0	10	342289
125	3000	○ 0	10	342288
150	1000	○ 0	10	342294
150	1500	○ 0	10	342293
150	2000	○ 0	10	342295
150	3000	○ 0	10	342292

Multihole backing pad for random orbital
sanders

HST 555



Advantages: Very good adhesion for all velour-coated discs due to fine, heat resistant self-fastening coating - For all standard hole patterns, also for netlike and diverse multihole patterns - Compatible with all standard orbital sanders

Diameter in mm	Adaptor	Thread/Shaft	Density	Max. RPM	Packing unit/pcs.	Cat. number
150	Festool adaptor	thread M8/ 5/16"	soft	10200 rpm	1	320488
150	Festool adaptor	thread M8/ 5/16"	medium	10200 rpm	1	320489
150	Festool adaptor	thread M8/ 5/16"	hard	10200 rpm	1	320587



Multihole backing pad for random orbital sanders

HST 555 A



Advantages: Very good adhesion for all velour-coated discs due to fine, heat resistant self-fastening coating - For all standard hole patterns, also for netlike and diverse multihole patterns - Self-fastening backing pad compatible with BOSCH GEX-150 series

Diameter in mm	Adaptor	Thread/Shaft	Density	Max. RPM	Packing unit/pcs.	Cat. number
150	Bosch adaptor	thread M8	medium	10200 rpm	1	320490

Discs with cloth backing, self-fastening

Coated abrasives

Abrasive cloth, self-fastening

CS 411 XK



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close
Backing	X-cotton

Applications:

Stainless steel	●
Steel	●
Metals	●
Wood	●

Advantages: Aggressive abrasive behaviour due to self-sharpening zirconia alumina - Resistant high-performance abrasive disc with tear-resistant cotton backing for rough and intermediate sanding on edges and surfaces

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Hole pattern	Packing unit/pcs.	Cat. number
115	40	○ 0	50	291979
115	60	○ 0	50	278073
115	80	○ 0	50	279638
125	40	○ 0	50	291980
125	60	○ 0	50	182412
125	80	○ 0	50	238954
150	40	○ 0	50	301271
150	60	○ 0	50	64647
150	80	○ 0	50	285565

Backing pad for self-fastening discs

HST 359



Advantages: Good adhesion for all velour-coated abrasive discs - For medium-duty rough grinding and polishing

Diameter in mm	Thread/Shaft	Packing unit/pcs.	Cat. number
115	thread M10	1	70432
115	thread M14	1	70433
115	8 mm	1	6874
125	thread M14	1	70434
125	8 mm	1	70435
150	thread M14	1	70436
180	thread M14	1	73066

Self-fastening support

CS 396 Y



Properties

Engaging elements	Mushroom heads
Thickness	1,5 mm
Temperature range	-30° to +80°



Advantages: Can be cut to size easily - Simple and safe fixing on smooth and even surfaces - Allows a quick change of the abrasive

All sizes and minimum purchasing quantities available on request



Quick Change Discs

About the product





Klingspor Quick Change Discs are designed for use on pneumatic and electric die grinders. The Quick Change Discs allow a fast and safe tool change.

Applications

- ▶ Tool design and construction
- ▶ Aviation industry
- ▶ Engine construction
- ▶ Turbine blade construction
- ▶ Mould construction
- ▶ Container and apparatus construction
- ▶ Model building / model making

Advantages

- ▶ Simple and fast disc changes reduce set-up times
- ▶ No clip or self-fastening device so no slipping or release caused by heat
- ▶ Disc stays centred
- ▶ Simple handling and smooth running characteristics
- ▶ Diverse applications thanks to different dimensions and backing plate hardnesses

Coated abrasive	Type	Grain	Coating	Characteristics	Page
	QMC/QRC 412	Aluminium oxide	●	The versatile disc for coarse and intermediate grinding on metal	166, 170
	QMC/QRC 411	Zirconia alumina	●	High stock removal rate for rough grinding and deburring of stainless steel and steel	167, 170
	QMC/QRC 409	Zirconia alumina	●	Extremely high stock removal rate and long service life for stainless steel and high alloy steels with multibond for cool grinding	167, 171
	QMC/QRC 910	Ceramic aluminium oxide	●	Extremely sharp ceramic grain for highest aggressivity and multibond for cool grinding	168, 172

Quick Change Discs

Applications guide

Minimum order quantities for made to order items

QCD	Diameter	Minimum order quantities
<i>QRC/QMC 412</i>	25 mm	1,700 pieces
<i>QRC/QMC 411</i>	38 mm	1,200 pieces
<i>QRC/QMC 409</i>	50 mm	900 pieces
<i>QRC/QMC 910</i>	76 mm	600 pieces



We reserve the right to over-deliver or under-deliver made to order items.

The right choice of the backing pad

Backing pads for Quick Change Discs are available in grades according to the required application. The firmer the backing pad the higher the stock removal rate. Softer backing plates are suited to working on contoured surfaces and finish sanding.

The QCA 555 (cat. no. 308693) allows use on a regular angle grinder.

Please observe the max. RPM for the backing pads in the product chart.

Two fastening systems have prevailed on the market for the product group 'Quick Change Discs'. Klingspor can offer you both, Quick Metal Connect and Quick Roll Connect, for all available types.



The system QMC (Quick Metal Connect)

The Quick Change Discs with metal locking are fixed on the backing pad by means of an internal thread.



The system QRC (Quick Roll Connect)

Fix the Quick Change Disc to the backing plate using the plastic threaded bushing and secure by turning 180° clockwise.



Installation on an angle grinder

The QCA 555 adapter allows you to use the quick change discs on conventional angle grinders with an M14 receiving spindle.

1. Mount the QCA 555 adapter with the M14 thread onto your angle grinder.
The lower clamping flange can remain on the machine.
2. Affix the backing pad QMC 555 or QRC 555 with the 1/4" thread on top of the adapter.




Quick Change Discs

Quick Metal Connect

Quick Change Disc

QMC 412

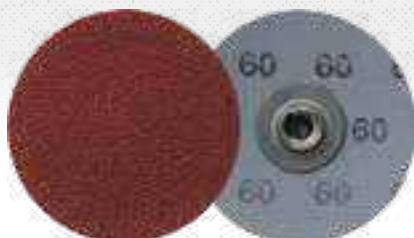

Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close

Applications:

Metals	●
NF metals	●

Advantages: For universal use in coarse and intermediate grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Packing unit/pcs.	Cat. number
38	36	100	295174
38	60	100	295177
38	80	100	295178
38	120	100	295180
50	36	100	295196
50	40	100	295197
50	50	100	295198
50	60	100	295199
50	80	100	295200
50	100	100	295201
50	120	100	295202
50	180	100	295204
50	240	100	295205
50	320	100	295206
76	60	50	295221
76	80	50	295222
76	120	50	295224
76	180	50	295226

Backing pad see page 168 / Adapter see page 173.


Quick Change Discs

Quick Metal Connect



Quick Change Disc

QMC 411



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close

Applications:

Stainless steel	●
Metals	●

Advantages: Aggressive abrasive behavior due to self-sharpening zirconia alumina - High removal rate on steel and stainless steel

Available grits:



16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Packing unit/pcs.	Cat. number
50	36	100	295300
50	40	100	295301
50	60	100	295303
50	80	100	295304
50	120	100	295305
76	36	50	295312
76	80	50	295316

Backing pad see page 168 / Adapter see page 173.

Quick Change Disc

QMC 409

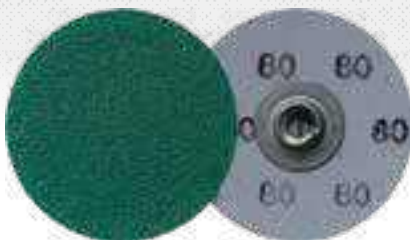

Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close

Applications:

Stainless steel	●
Metals	●

Advantages: High removal rate on stainless steel - Multibond allows cool grinding on stainless steel - Minimal clogging on aluminium

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Packing unit/pcs.	Cat. number
50	60	100	295337
50	80	100	295338
50	120	100	295339



Backing pad see page 168 / Adapter see page 173.

Quick Change Discs

Quick Metal Connect / Backing pad

Quick Change Disc

QMC 910

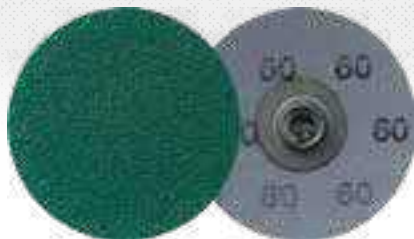

Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close

Applications:

Stainless steel	●
High alloy steel	●

Advantages: Extremely high removal rate on stainless steel due to micro-crystalline and self-sharpening ceramic grit - Continuously aggressive abrasive properties - Multibond allows cool grinding on stainless steel

Available grits:


16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Packing unit/pcs.	Cat. number
38	60	100	295359
38	80	100	295360
50	36	100	295366
50	40	100	295367
50	60	100	295369
50	80	100	295370

Backing pad see page 168 / Adapter see page 173.

Backing pad

QMC 555



Advantages: For secure mounting of QMC discs - Optimized abrasive properties (aggressiveness, surface quality) due to three hardnesses

Diameter x Shaft in mm	Density	Colour	Max. RPM	Packing unit/pcs.	Cat. number
25 x 6	medium	blue	30000 rpm	1	295422
38 x 6	soft	grey	30000 rpm	1	300058
38 x 6	medium	blue	30000 rpm	1	295424
38 x 6	firm	red	30000 rpm	1	300059
50 x 6	soft	grey	30000 rpm	1	300060
50 x 6	medium	blue	30000 rpm	1	295426



Quick Change Discs

Backing pad



►► Continuation of QMC 555, Backing pad


Diameter x Shaft in mm	Density	Colour	Max. RPM	Packing unit/pcs.	Cat. number
50 x 6	firm	red	30000 rpm	1	295427
76 x 6	soft	grey	20000 rpm	1	300061
76 x 6	medium	blue	20000 rpm	1	295430
76 x 6	firm	red	20000 rpm	1	295431

Quick Change Discs

Quick Roll Connect

Quick Change Disc

QRC 412



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close

Applications:

Metals	●
NF metals	●

Advantages: For universal use in coarse and intermediate grinding

Available grits:


16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Packing unit/pcs.	Cat. number
50	36	100	295207
50	40	100	295208
50	60	100	295210
50	80	100	295211
50	120	100	295213
76	36	50	295229
76	60	50	295232
76	80	50	295233
76	120	50	295235

Backing pad see page 173 / Adapter see page 173.

Quick Change Disc

QRC 411



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close

Applications:

Stainless steel	●
Metals	●

Advantages: Aggressive abrasive behavior due to self-sharpening zirconia alumina - High removal rate on steel and stainless steel

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Packing unit/pcs.	Cat. number
50	36	100	295306
50	40	100	295307
50	60	100	295309
50	80	100	295310



Quick Change Discs

Quick Roll Connect




►► Continuation of QRC 411, Quick Change Disc

Diameter in mm	Grit	Packing unit/pcs.	Cat. number
50	120	100	295311
76	36	50	295318
76	60	50	295321
76	80	50	295322

Backing pad see page 173 / Adapter see page 173.

Quick Change Disc

QRC 409



Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close

Applications:

Stainless steel	●
Metals	●

Advantages: High removal rate on stainless steel - Multibond allows cool grinding on stainless steel - Minimal clogging on aluminium

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Packing unit/pcs.	Cat. number
50	36	100	295340
50	60	100	295343
50	80	100	295344


Backing pad see page 173 / Adapter see page 173.

Quick Change Discs

Quick Roll Connect

Quick Change Disc

QRC 910



Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close

Applications:

Stainless steel	●
High alloy steel	●

Advantages: Extremely high removal rate on stainless steel due to micro-crystalline and self-sharpening ceramic grit - Continuously aggressive abrasive properties - Multibond allows cool grinding on stainless steel

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Packing unit/pcs.	Cat. number
50	40	100	295372
50	60	100	295374
50	80	100	295375

Backing pad see page 173 / Adapter see page 173.


Quick Change Discs

Backing pad / Adapter



Backing pad

QRC 555



Advantages: For secure mounting of QRC discs - Optimized abrasive properties (aggressiveness, surface quality) due to two hardnesses

Diameter x Shaft in mm	Density	Colour	Max. RPM	Packing unit/pcs.	Cat. number
25 x 6	medium	blue	30000 rpm	1	295423
38 x 6	medium	blue	30000 rpm	1	295425
50 x 6	medium	blue	30000 rpm	1	295428
50 x 6	firm	red	30000 rpm	1	295429
76 x 6	medium	blue	20000 rpm	1	295432
76 x 6	firm	red	20000 rpm	1	295433

Adapter for quick change disc backing pad

QCA 555



Advantages: Quick Change Disc adapter with M14 thread - Allows use of quick change discs on a regular angle grinder

Width x Length in mm	Thread/Shaft	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
20 x 30	thread M14	80 m/s	75400 rpm	1	308693



Abrasive mop wheels

About the product

Developed by Klingspor over 40 years ago the abrasive mop wheel has found many practical and economical uses in surface finishing work. The Klingspor abrasive mop wheel comprises of high quality grinding flaps coated with aluminium oxide. The fan-shaped radial arrangement is firmly anchored by a resin core at the centre of the abrasive mop wheel. The structure of the abrasive mop wheel provides for very soft, comfortable grinding behaviour and adapts optimally to the contours of the workpiece. Klingspor abrasive mop wheels are especially suited for achieving a very smooth surface finish.

Klingspor has the perfect abrasive mop wheel to suit every surface, ranging from even to profiled surfaces, and is suited for nearly every material.

Machines

Klingspor abrasive mop wheels can, depending on the dimensions, be used with the following machines:



Die grinders



Angle grinders



Flexible shafts



Drilling machines



Floor stand grinders



Satin finishing machine

Minimum order quantities for made to order items

Product	Diameter in mm	Minimum order quantities
SM 611	100–165	20 pieces
SM 611 W/H/S *	200–300	10 pieces
WSM 617 *	350–410	4 pieces

* Available dimensions on request

Product	Diameter in mm	Minimum order quantities
FSR 618	165	20 pieces
	200–300	10 pieces
	350–400	4 pieces
MM 650	100–165	20 pieces
	200–300	10 pieces
	>300	4 pieces



We reserve the right to over-deliver or under-deliver made to order items.

Type	Page	Material applications															Machine applications						
		Metal	Apparatus / container engineering	Precision engineering	Mould making	Fittings	Pipes	Profiled sections	Tools	Mountings	Cutlery	Wood	Contoured wood	Model construction	Profiled sections	Paint / varnish / fillers	Plastics	Flexible shafts	Drilling machines	Die grinders	Automatic grinders	Floor stand grinders	Angle grinders
SM 611	180	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●		
SM 611 W	181	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●		
SM 611 H	182	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●		
SM 611 S	186	●	●				●																●
MM 630	184	●	○		○		○	○				●	●	●	●	●	○	●	●				
MM 650	182	●	●	○	○	○	○	●		○		●	●	●	●	●	○	●		●		●	
WSM 617	185	●	●	●	●	●	●	●	●	●	○	○	●	●	●	●	○						●
FSR 618	184	●	○	●	●	●	●	●	●	●	○	○	○	○	○	○	●			●	●		

● = main application ○ = possible application

Abrasive mop wheels

Applications guide

Mounting


Abrasive mop wheels SM 611, MM 650,

These abrasive mop wheels are mounted to the machine spindle with two SMD 612 mounting plates.

Correct mounting is important

To ensure that the abrasive mop wheel runs smoothly, please check that the mounting plates are mounted evenly and fit tightly to the inner edge of the metal side mounting plate retaining groove. The mounting plates are equipped with mounting bore holes. Making bore hole adjustments to fit the respective shaft diameter easy and quick – by simply drilling the appropriate bore hole diameter. Please refer to product text SMD 612 for more information on maximum bore hole diameters.

The special abrasive mop varieties listed below are designed in such a way that they can be fitted on top of the respective machine shafts without any additional SMD 612 mounting plates:

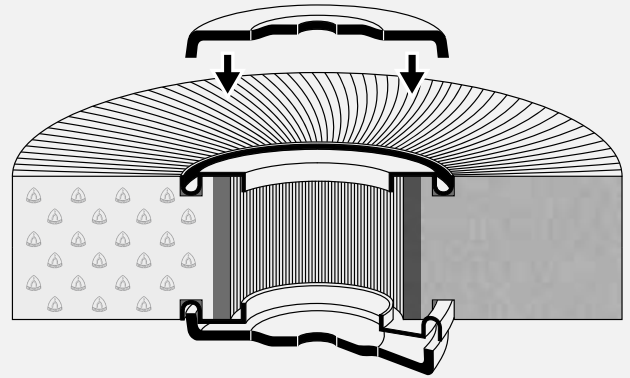

Abrasive mop wheel SM 611 H

The abrasive mop wheel with a wooden core is preferred for work on floor stand grinders with cone-shaped mounting spindles. It can be mounted directly on the machine spindle without the use of a mounting plate. Abrasive mop wheel SM 611 H is equipped with a Ø 13 mm bore hole. Making bore hole adjustments to fit the respective shaft diameter easy and quick - by simply drilling the appropriate bore hole diameter.



Abrasive mop wheel SM 611 W

This abrasive mop wheel is equipped with a Ø 25.4 mm mounting bore hole and can be mounted to a machine without the use of a mounting plate.



WSM 617

The WSM 617, an abrasive mop wheel of the second generation with an integrated M14 or 5/8" inside thread, can be mounted and released again without the need for any additional tools.



Abrasive flap drum SM 611 S,

These drums come as standard with a 19 mm receiving hole and keyway standard satin finishing machines that are equipped with the corresponding machine spindle.

The surface scratch pattern

The abrasive mop wheel's construction makes it perfect for achieving a smooth surface finish.

The abrasive mop wheel achieves a significantly smoother surface finish compared to that of a belt grinder. When choosing a grit size please select a grit size that is 2-3 sizes coarser than that used with a belt grinder.



Abrasive belt 40 grit

- ▶ short distinctive line pattern
- ▶ rough surface
- ▶ high contrast finish




Abrasive mop wheel 40 grit

- ▶ long continuous line pattern
- ▶ minimum depression
- ▶ smooth finish

Common profilings

Pre-profiled abrasive mop wheels are designed to adapt perfectly to the contours of your individual workpiece and provide excellent results from the very beginning. Time consuming pre-profiling of the abrasive mop is no longer needed.

If you require an individualised abrasive mop wheel, we would be pleased to assist you with this.

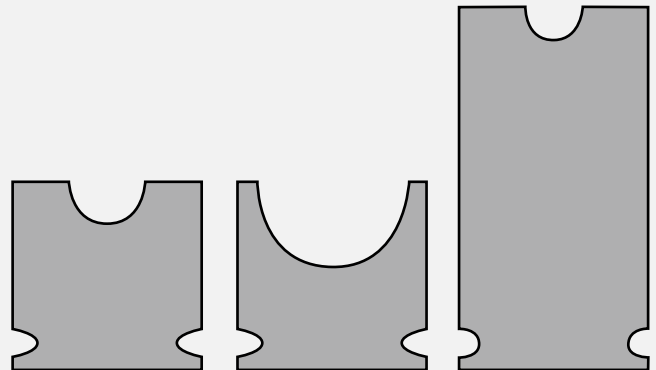

Abrasive mop wheels

Applications guide

Selection of the correct mop diameter

To be able to work at the optimal cutting rate (38-42 m/s) the selection of the abrasive mop diameter for machines, that are not equipped with RPM setting functionality, is based on the set RPM. Machines that are equipped with RPM setting functionality are to be set according to the abrasive mop wheel diameter settings.

Before turning the machine on please check that the pre-set RPM does not exceed the maximum abrasive mop RPM setting.

Please refer to the adjoining table for the correct abrasive mop diameter settings for the optimal RPM range.

If the abrasive mop wheel is used at the optimal RPM setting, the grinding flaps stand up straight as result of the centrifugal forces around the core and provide optimum abrasive mop wheel grinding properties. Only the edges of the grinding flaps are subjected to wear and tear. This results in the use of new and sharper grits. This ensures uniform stock removal and surface finish – from the first to the last workpiece.

Suboptimal RPM settings (too low) result in the incorrect positioning of the grinding flap as a result of tool / grinding pressure. This results in wear and tear on the grit side of the grinding flaps, and the area the abrasive mop wheel grinds is too large, which in turn results in higher friction between the workpiece and the grinding flaps. Consequently the workpiece and abrasive mop wheel are subjected to a higher thermal load and a higher degree of wear and tear on the grinding flaps. Ultimately, this can result in the failure of the abrasive mop wheel and damaged grinding flaps.


Maximum RPM

Klingspor SM 611 abrasive mop wheels are certified for widths of ≤ 100 mm and maximum revolutions per minute of 50 m/s.

Optimal cutting rate

The abrasive mop wheel's optimum performance range is a cutting rate between 38-42 m/s.

Mop-Ø [mm]	Recommended RPM range [min-1] (38 - 42 m/s)
100	7,300–8,000
140	5,200–5,700
165	4,400–4,800
200	3,650–4,000
250	2,900–3,200
300	2,400–2,650
350	2,100–2,300
380	1,900–2,100
410	1,750–1,950
480	1,500–1,650
510	1,400–1,550



- a Outer diameter side cover
- b Hole side cover
- c Outer diameter mop

Mop side cover and hole relative to the outer mop diameter*

Type	Mop wheel outer Ø [mm]	Metal side cover		Matching clamping flange SMD 612
		Outer Ø [mm]	Hole [mm]	
SM 611	100 - 140	60	21,0	14821
	150 - 165	82	43,1	14823
	200 - 250	125	68,2	14824
	300	158	97,8	14826
	350	198	131,8	14827
	380 - 410	224	151,6	14829
	480 - 510	332	244,5	-
MM 650	250	82	43,1	14823

* applies to standard versions (stock items)

Packet assembling

Another way to influence the grinding result is packet assembling. During packet assembling an intermediate layer is stamped between the cloth flaps. This creates space between the individual flaps, which influences the grinding behaviour of the wheel. The higher the ratio of grinding flaps to intermediate layers, the harder the abrasive mop wheel.

The standard abrasive mop wheel is manufactured without packet assembling.


Exception: Starting at a diameter of ≥ 250 mm, a width of ≥ 50 mm, and a grit size of 220 and finer, abrasive mop wheels are manufactured with a packet assembly ratio of 5:1.



5:1



3:1



1:1

Factors influencing the grinding result

The surface finish is dependent upon a wide range of process parameters. The table below illustrates the different influencing factors and their affect on the grinding result.

Influencing factor		Grinding result		
		Stock removal*	Surface finish	Service life
Cutting rate	high	increases	finer	shorter
	low	decreases	coarser	longer
Tool / grinding pressure	high	increases	coarser	shorter
	marginal	decreases	finer	longer
Grit size	rough	increases	coarser	shorter
	fine	decreases	finer	longer
Grinding aids (oils, lubricants)	without	increases	coarser	shorter
	with	decreases	finer	longer

* Note: the essential parameters that affect the stock removal rate are the selection of a coarser (more stock removal) or finer (less stock removal) grit.

The safe use of Klingspor abrasives

Klingspor abrasive mops are manufactured in accordance with the oSa and EN 13743 standards, this ensures the highest level of user safety.



Wear safety goggles or glasses to protect the eyes



Wear a dust mask



Use ear protectors



Wear safety gloves to protect hands




Observe safety instructions

Abrasive mop wheels

Abrasive mop

Abrasive mop

SM 611



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	●
Metals	●

Advantages: Even surface scratch pattern due to continuously fresh, unused abrasive grit - For universal use on all materials - Adapts optimally to workpiece contour

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Width x Bore in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 30 x 21	40	50 m/s	9500 rpm	5	12000
100 x 30 x 21	60	50 m/s	9500 rpm	5	12002
100 x 30 x 21	80	50 m/s	9500 rpm	5	12003
100 x 30 x 21	120	50 m/s	9500 rpm	5	12005
100 x 30 x 21	180	50 m/s	9500 rpm	5	12007
140 x 50 x 21	40	50 m/s	6800 rpm	3	12060
140 x 50 x 21	60	50 m/s	6800 rpm	3	12062
140 x 50 x 21	80	50 m/s	6800 rpm	3	12063
140 x 50 x 21	120	50 m/s	6800 rpm	3	12065
165 x 25 x 43,1	40	50 m/s	5800 rpm	5	12075
165 x 25 x 43,1	60	50 m/s	5800 rpm	5	12077
165 x 25 x 43,1	80	50 m/s	5800 rpm	5	12078
165 x 25 x 43,1	100	50 m/s	5800 rpm	5	12079
165 x 25 x 43,1	120	50 m/s	5800 rpm	5	12080
165 x 25 x 43,1	150	50 m/s	5800 rpm	5	12081
165 x 25 x 43,1	240	50 m/s	5800 rpm	5	12084
165 x 30 x 43,1	40	50 m/s	5800 rpm	5	12090
165 x 30 x 43,1	60	50 m/s	5800 rpm	5	12092
165 x 30 x 43,1	80	50 m/s	5800 rpm	5	12093
165 x 30 x 43,1	120	50 m/s	5800 rpm	5	12095
165 x 30 x 43,1	180	50 m/s	5800 rpm	5	12097
165 x 50 x 43,1	40	50 m/s	5800 rpm	3	12105
165 x 50 x 43,1	50	50 m/s	5800 rpm	3	12106
165 x 50 x 43,1	60	50 m/s	5800 rpm	3	12107
165 x 50 x 43,1	80	50 m/s	5800 rpm	3	12108
165 x 50 x 43,1	100	50 m/s	5800 rpm	3	12109
165 x 50 x 43,1	120	50 m/s	5800 rpm	3	12110
165 x 50 x 43,1	150	50 m/s	5800 rpm	3	12111
165 x 50 x 43,1	180	50 m/s	5800 rpm	3	12112
165 x 50 x 43,1	240	50 m/s	5800 rpm	3	12114
165 x 50 x 43,1	320	50 m/s	5800 rpm	3	12116
200 x 25 x 68,2	120	50 m/s	4800 rpm	5	12140
200 x 50 x 68,2	40	50 m/s	4800 rpm	3	12165
200 x 50 x 68,2	60	50 m/s	4800 rpm	3	12167



Abrasive mop wheels

Abrasive mop



►► Continuation of SM 611, Abrasive mop

Diameter x Width x Bore in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
200 x 50 x 68,2	80	50 m/s	4800 rpm	3	12168
200 x 50 x 68,2	120	50 m/s	4800 rpm	3	12170
250 x 25 x 68,2	60	50 m/s	3800 rpm	2	12197
250 x 25 x 68,2	80	50 m/s	3800 rpm	2	12198
250 x 25 x 68,2	120	50 m/s	3800 rpm	2	12200
250 x 30 x 68,2	60	50 m/s	3800 rpm	2	12212
250 x 30 x 68,2	80	50 m/s	3800 rpm	2	12213
250 x 30 x 68,2	240	50 m/s	3800 rpm	2	12219
250 x 50 x 68,2	40	50 m/s	3800 rpm	1	12225
250 x 50 x 68,2	60	50 m/s	3800 rpm	1	12227
250 x 50 x 68,2	80	50 m/s	3800 rpm	1	12228
250 x 50 x 68,2	120	50 m/s	3800 rpm	1	12230
250 x 50 x 68,2	180	50 m/s	3800 rpm	1	12232
250 x 50 x 68,2	220	50 m/s	3800 rpm	1	12233
250 x 50 x 68,2	240	50 m/s	3800 rpm	1	12234
250 x 50 x 68,2	320	50 m/s	3800 rpm	1	12236
300 x 50 x 97,8	40	50 m/s	3200 rpm	1	12285
300 x 50 x 97,8	80	50 m/s	3200 rpm	1	12288
300 x 50 x 97,8	120	50 m/s	3200 rpm	1	12290
300 x 50 x 97,8	180	50 m/s	3200 rpm	1	12292
300 x 50 x 97,8	240	50 m/s	3200 rpm	1	12294
300 x 50 x 97,8	320	50 m/s	3200 rpm	1	12296

Use only with mounting plate SMD 612 (page 183)!

Abrasive mop

SM 611 W



Properties

Bonding agent Resin	
Grain	Aluminium oxide

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	●
Metals	●



Advantages: Even surface scratch pattern due to continuously fresh, unused abrasive grit - For universal use on all materials - Adapts optimally to workpiece contour - Can be used without mounting plate SMD 612

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Width x Bore in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
165 x 25 x 25,4	40	50 m/s	5800 rpm	5	221597
165 x 25 x 25,4	60	50 m/s	5800 rpm	5	221596
165 x 25 x 25,4	80	50 m/s	5800 rpm	5	221595
165 x 25 x 25,4	120	50 m/s	5800 rpm	5	221593
165 x 25 x 25,4	180	50 m/s	5800 rpm	5	221591

Abrasive mop wheels

Abrasive mop

Abrasive mop

SM 611 H



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	●
Metals	●



Advantages: Wooden core with mounting bore diameter of 13 mm for fast mounting - Can be used without mounting plate SMD 612 - Enlargement of the mounting bore is relatively uncomplicated

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
Diameter x Width x Bore in mm					Grit		Max. operating speed				Max. RPM				Packing unit/pcs.				Cat. number					
165 x 25 x 13					40		50 m/s				5800 rpm				5				10030					
165 x 25 x 13					60		50 m/s				5800 rpm				5				10005					
165 x 25 x 13					80		50 m/s				5800 rpm				5				10004					
165 x 25 x 13					120		50 m/s				5800 rpm				5				10006					
165 x 25 x 13					240		50 m/s				5800 rpm				5				10027					
165 x 50 x 13					40		50 m/s				5800 rpm				3				10022					
165 x 50 x 13					60		50 m/s				5800 rpm				3				10017					
165 x 50 x 13					80		50 m/s				5800 rpm				3				10018					
165 x 50 x 13					120		50 m/s				5800 rpm				3				15990					

Abrasive mop

MM 650



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	●
Plastic	○



Advantages: Very suitable for workpieces with high profiles due to grinding flaps with longitudinal slots - Produces a very fine surface

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
Diameter x Width x Bore in mm							Grit	Max. operating speed					Max. RPM			Packing unit/pcs.			Cat. number					
250 x 50 x 43,1							80	32 m/s					2450 rpm			2			2750					
250 x 50 x 43,1							100	32 m/s					2450 rpm			2			2486					
250 x 50 x 43,1							120	32 m/s					2450 rpm			2			2485					
250 x 50 x 43,1							150	32 m/s					2450 rpm			2			2483					



Abrasive mop wheels

Abrasive mop



►► Continuation of MM 650, Abrasive mop

Diameter x Width x Bore in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
250 x 50 x 43,1	180	32 m/s	2450 rpm	2	2482
250 x 100 x 43,1	80	32 m/s	2450 rpm	1	10210
250 x 100 x 43,1	120	32 m/s	2450 rpm	1	2740
250 x 100 x 43,1	180	32 m/s	2450 rpm	1	2742

Use only with mounting plate SMD 612 (Cat. number 14823)!

Mounting plate

SMD 612



Advantages: Ensures a smooth running and the safe mounting on the machine


Diameter x Bore in mm	Suitable for	Max. enlargement of bore Ø in mm	Packing unit/pcs.	Cat. number
55 x 10	SM 611 (Ø100+Ø140)	Ø 20 mm	2	14821
79 x 12	SM 611/NCW/NFW 600 (Ø150+Ø165) + MM 650 (Ø250)	Ø 40 mm	2	14823
121 x 14	SM 611/NCW/NFW 600 (Ø200+Ø250)	Ø 50 mm	2	14824
155 x 20	SM 611 (Ø300)	Ø 50 mm	2	14826
195 x 25	SM 611 (Ø350)	Ø 80 mm	2	14827
221 x 25,4	SM 611 (Ø380+Ø410)	Ø 80 mm	2	14829

Abrasive mop wheels

Abrasive mop

Abrasive mop

MM 630



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	●
Plastic	○

Advantages: Very suitable for workpieces with high profiles due to grinding flaps with longitudinal slots - For use on hand operated machines - Fine surface pattern


Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Width x Shaft in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
180 x 25 x 6	80	40 m/s	4200 rpm	2	262630
180 x 25 x 6	120	40 m/s	4200 rpm	2	262631
180 x 25 x 6	180	40 m/s	4200 rpm	2	262632
180 x 50 x 6	80	40 m/s	4200 rpm	2	262634
180 x 50 x 6	120	40 m/s	4200 rpm	2	262635
180 x 50 x 6	180	40 m/s	4200 rpm	2	262636

Pleated mop

FSR 618



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Metals	●
Wood	○
Paint/Varnish/Filler	○
Plastic	○

Advantages: Pleated mop wheel consisting of pleated aluminum oxide cloth flaps allows easy access to joints, grooves and slots - Very large immersion depth

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Bore in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
165 x 14	40	50 m/s	5800 rpm	10	10187
165 x 14	60	50 m/s	5800 rpm	10	5830
165 x 14	80	50 m/s	5800 rpm	10	5831
165 x 14	120	50 m/s	5800 rpm	10	73994
165 x 14	150	50 m/s	5800 rpm	10	25998
165 x 14	220	50 m/s	5800 rpm	10	26033

Abrasive mop wheels

Abrasive mop



Angle grinder mop

WSM 617



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Steel	●
Stainless steel	●
Paint	●
Plastic	●

Wood	●
------	---

Advantages: Can be used on all standard angle grinders (80 m/s) - For universal use; in front and side position - Easy tool changing by hand without additional aids

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Width in mm	Grit	Thread/Shaft	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 20	40	thread M14	80 m/s	13300 rpm	2	277014
115 x 20	60	thread M14	80 m/s	13300 rpm	2	277015
115 x 20	80	thread M14	80 m/s	13300 rpm	2	277016
115 x 20	120	thread M14	80 m/s	13300 rpm	2	277017
125 x 20	40	thread M14	80 m/s	12200 rpm	2	277018
125 x 20	60	thread M14	80 m/s	12200 rpm	2	277019
125 x 20	80	thread M14	80 m/s	12200 rpm	2	277020
125 x 20	120	thread M14	80 m/s	12200 rpm	2	277021



The all-round abrasive mop wheel for the angle grinder

- Quick and easy mounting
- Multi purpose
- Extremely safe
- Ideal for working on hard-to-reach places

Satin finishing drums

Satin finishing drum

SM 611 S



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Paint/Varnish/Filler	●
Wood	●
Plastic	●
Metals	●

Advantages: Even surface scratch pattern - Special product for fine surface finishing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Width x Bore in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 50 x 19	40	19 m/s	3700 rpm	3	60868
100 x 50 x 19	60	19 m/s	3700 rpm	3	60899
100 x 50 x 19	80	19 m/s	3700 rpm	3	60943
100 x 50 x 19	120	19 m/s	3700 rpm	3	61045
100 x 100 x 19	40	19 m/s	3700 rpm	1	83167
100 x 100 x 19	60	19 m/s	3700 rpm	1	7325
100 x 100 x 19	80	19 m/s	3700 rpm	1	7326
100 x 100 x 19	120	19 m/s	3700 rpm	1	93076
100 x 100 x 19	180	19 m/s	3700 rpm	1	93021
100 x 100 x 19	240	19 m/s	3700 rpm	1	104999

Notes



Abrasive mop

Small abrasive mops

About the product

The small abrasive mop comprises of grinding flaps coated with aluminium oxide. The fan-shaped abrasive flaps are securely fixed to a central mounting spindle. The grinding flaps' fan-shaped radial arrangement adapts perfectly to the contours of the workpiece.

The wide range of grits (40 – 320) and top size coat additives (with and without multibonds) make the Klingspor small abrasive mop perfect for a wide range of applications.

The small abrasive mop is equipped with the following standard features: a 6 mm or 3 mm fixing spindle and a shaft length of 40 mm.

Application examples

- ▶ Grinding work for tool and mould making
- ▶ Processing of profiled workpieces
- ▶ Processing of internal surfaces on pipework, fittings and difficult-to-reach areas
- ▶ Grinding work on small parts and casing

Type	Material applications															Machine applications			Page
	Metal	Apparatus / container engineering	Precision engineering	Mould making	Fittings	Pipes	Profiled sections	Tools	Mountings	Cutlery	Wood	Contoured wood	Model construction	Profiled sections	Plastics	Flexible shafts	Drilling machines	Die grinders	
KM 613	●	●	●	●	●	●	●	●	●	●	○	○	○	○	○	●	●	●	204
KM 615	●	●	●	●	●	●	●	●	●	●			○	○		●	●	●	208
KMT 614	●	●	●	●	●	●	●	●	●	●	○	○	○	○	○	●	●	●	209

● = main application ○ = possible application

Minimum order quantities for made to order items

Product	Grit	Minimum order quantities
KM 613	40–320	250 pieces
	from 360	500 pieces
KM 615	40–180	250 pieces
KMT 614	40–320	250 pieces
	from 360	500 pieces

Application recommendations

- ▶ The small abrasive mop can be used with flexible shaft grinders, die grinders (pneumatic, electric) or drilling machines.
- ▶ The small abrasive mop's optimum performance is achieved at a cutting rate between 20 – 25 m/s. By observing these speeds, the product will perform at its most economical as regards tool wear, stock removal, surface finish and thermal load of the workpiece.

Factors influencing the grinding result

Stock removal

An increase in stock removal should only occur as a result of using coarser grit and not as a result of increased tool / grinding pressure.

Steady increased tool / grinding pressure

- ▶ results in unnecessary tool wear and tear
- ▶ results in increased workpiece temperature load
- ▶ can result in tool failure

Surface finish


- ▶ The wear of the outer edge of the grinding flaps results in the presentation of new sharp abrasive grain, which results in a uniform surface finish
- ▶ The surface roughness decreases through an increase in the cutting rate
- ▶ An increase in the tool / grinding pressure results in a coarser surface finish
- ▶ The small abrasive mop achieves a significantly smoother surface finish compared to that of a belt grinder

Temperature load

- ▶ By reducing the tool / grinding pressure and the peripheral speeds the temperature load of the workpiece and the tool is reduced.

ø [mm]	Height h [mm]	Maximum operating speed [m/s]*	RPM [1/min]		
			L ₀ = 0 mm	L ₀ = 10 mm	L ₀ = 20 mm
10	≤ 15	40	76,300	55,000	35,000
15	≤ 25	40	50,500	37,000	28,000
20	≤ 20	40	38,150	28,600	21,900
25	≤ 15	40	30,500	22,900	17,500
30	≤ 15	40	25,400	19,000	14,600
40	≤ 20	40	19,000	14,300	10,900
50	≤ 30	40	15,200	11,400	8,700
60	≤ 40	40	12,700	9,500	7,300
	50	32	10,150	7,900	6,300
80	≤ 40	40	9,500	7,100	5,400
	50	32	7,650	6,000	4,800

* for exposed shank length L₀=0 mm

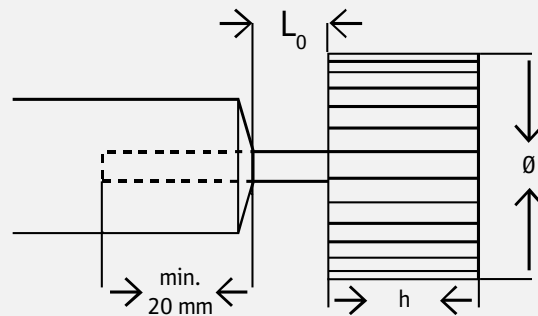

Tool wear

Tool wear is reduced by working with a lower grinding pressure.

To ensure the optimal and most efficient use of a tool

- ▶ the maximum revolutions per minute may not be exceeded
- ▶ the fixing spindle length of the small abrasive mop in the mounting device must be at least 20 mm
- ▶ the set revolutions per minute may not be exceeded when using an exposed shaft length L₀ (please refer to the table above)


For additional information please refer to the safety information provided with the product.

Small abrasive mop

Abrasive mop

Small abrasive mop

KM 613



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Stainless steel	●
Metals	●
Wood	○
Plastic	○

Advantages: Universal product for steel and stainless steel materials - Even removal rate - Suitable for use in hard-to-reach areas

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Width x Shaft in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
10 x 10 x 3	40	40 m/s	76300 rpm	10	327992
10 x 10 x 3	60	40 m/s	76300 rpm	10	327993
10 x 10 x 3	80	40 m/s	76300 rpm	10	327994
10 x 10 x 3	120	40 m/s	76300 rpm	10	327995
10 x 10 x 3	180	40 m/s	76300 rpm	10	327997
10 x 10 x 3	240	40 m/s	76300 rpm	10	327998
10 x 10 x 3	320	40 m/s	76300 rpm	10	327999
20 x 10 x 3	60	40 m/s	38150 rpm	25	325948
20 x 10 x 3	80	40 m/s	38150 rpm	25	305324
20 x 10 x 3	120	40 m/s	38150 rpm	25	307342
20 x 10 x 3	180	40 m/s	38150 rpm	25	305888
20 x 10 x 3	240	40 m/s	38150 rpm	25	307343
20 x 10 x 3	320	40 m/s	38150 rpm	25	307344
20 x 10 x 6	40	40 m/s	38150 rpm	25	284729
20 x 10 x 6	60	40 m/s	38150 rpm	25	284730
20 x 10 x 6	80	40 m/s	38150 rpm	25	284731
20 x 10 x 6	120	40 m/s	38150 rpm	25	284732
20 x 10 x 6	180	40 m/s	38150 rpm	25	284733
20 x 10 x 6	240	40 m/s	38150 rpm	25	284734
20 x 10 x 6	320	40 m/s	38150 rpm	25	284735
20 x 15 x 6	40	40 m/s	38150 rpm	25	284736
20 x 15 x 6	60	40 m/s	38150 rpm	25	284737
20 x 15 x 6	80	40 m/s	38150 rpm	25	284738
20 x 15 x 6	120	40 m/s	38150 rpm	25	284739
20 x 15 x 6	180	40 m/s	38150 rpm	25	284740
20 x 15 x 6	240	40 m/s	38150 rpm	25	284741
20 x 20 x 6	40	40 m/s	38150 rpm	25	284743
20 x 20 x 6	60	40 m/s	38150 rpm	25	284744
20 x 20 x 6	80	40 m/s	38150 rpm	25	284745
20 x 20 x 6	120	40 m/s	38150 rpm	25	284746
20 x 20 x 6	180	40 m/s	38150 rpm	25	284747
20 x 20 x 6	240	40 m/s	38150 rpm	25	284748
20 x 20 x 6	320	40 m/s	38150 rpm	25	284749
25 x 10 x 6	40	40 m/s	30500 rpm	10	253816



Small abrasive mop

Abrasive mop



►► Continuation of KM 613, Small abrasive mop

Diameter x Width x Shaft in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
25 x 10 x 6	60	40 m/s	30500 rpm	10	253591
25 x 10 x 6	80	40 m/s	30500 rpm	10	253592
25 x 10 x 6	120	40 m/s	30500 rpm	10	253593
25 x 15 x 6	40	40 m/s	30500 rpm	10	253817
25 x 15 x 6	60	40 m/s	30500 rpm	10	250985
25 x 15 x 6	80	40 m/s	30500 rpm	10	237496
25 x 15 x 6	120	40 m/s	30500 rpm	10	253606
25 x 15 x 6	150	40 m/s	30500 rpm	10	253607
25 x 15 x 6	240	40 m/s	30500 rpm	10	253608
30 x 5 x 3	60	40 m/s	25400 rpm	10	12781
30 x 5 x 3	80	40 m/s	25400 rpm	10	12782
30 x 5 x 3	120	40 m/s	25400 rpm	10	12784
30 x 5 x 6	60	40 m/s	25400 rpm	10	12790
30 x 5 x 6	80	40 m/s	25400 rpm	10	12791
30 x 5 x 6	120	40 m/s	25400 rpm	10	12793
30 x 5 x 6	150	40 m/s	25400 rpm	10	12794
30 x 5 x 6	240	40 m/s	25400 rpm	10	12796
30 x 10 x 3	60	40 m/s	25400 rpm	10	12808
30 x 10 x 3	80	40 m/s	25400 rpm	10	12809
30 x 10 x 3	120	40 m/s	25400 rpm	10	12811
30 x 10 x 3	240	40 m/s	25400 rpm	10	12814
30 x 10 x 6	40	40 m/s	25400 rpm	10	12816
30 x 10 x 6	60	40 m/s	25400 rpm	10	12817
30 x 10 x 6	80	40 m/s	25400 rpm	10	12818
30 x 10 x 6	100	40 m/s	25400 rpm	10	12819
30 x 10 x 6	120	40 m/s	25400 rpm	10	12820
30 x 10 x 6	150	40 m/s	25400 rpm	10	12821
30 x 10 x 6	180	40 m/s	25400 rpm	10	12822
30 x 10 x 6	240	40 m/s	25400 rpm	10	12823
30 x 10 x 6	320	40 m/s	25400 rpm	10	12824
30 x 15 x 6	40	40 m/s	25400 rpm	10	12843
30 x 15 x 6	60	40 m/s	25400 rpm	10	12844
30 x 15 x 6	80	40 m/s	25400 rpm	10	12845
30 x 15 x 6	100	40 m/s	25400 rpm	10	12846
30 x 15 x 6	120	40 m/s	25400 rpm	10	12847
30 x 15 x 6	150	40 m/s	25400 rpm	10	12848
30 x 15 x 6	180	40 m/s	25400 rpm	10	12849
30 x 15 x 6	240	40 m/s	25400 rpm	10	12850
30 x 15 x 6	320	40 m/s	25400 rpm	10	12851
40 x 10 x 6	40	40 m/s	19000 rpm	10	12870
40 x 10 x 6	60	40 m/s	19000 rpm	10	12871
40 x 10 x 6	80	40 m/s	19000 rpm	10	12872
40 x 10 x 6	120	40 m/s	19000 rpm	10	12874
40 x 15 x 6	40	40 m/s	19000 rpm	10	12906
40 x 15 x 6	60	40 m/s	19000 rpm	10	12907
40 x 15 x 6	80	40 m/s	19000 rpm	10	12908
40 x 15 x 6	100	40 m/s	19000 rpm	10	12909
40 x 15 x 6	120	40 m/s	19000 rpm	10	12910
40 x 15 x 6	150	40 m/s	19000 rpm	10	12911
40 x 15 x 6	180	40 m/s	19000 rpm	10	12912
40 x 15 x 6	240	40 m/s	19000 rpm	10	12913



Small abrasive mop

Abrasive mop

►► Continuation of KM 613, Small abrasive mop

Diameter x Width x Shaft in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
40 x 15 x 6	320	40 m/s	19000 rpm	10	12914
40 x 20 x 6	40	40 m/s	19000 rpm	10	12942
40 x 20 x 6	60	40 m/s	19000 rpm	10	12943
40 x 20 x 6	80	40 m/s	19000 rpm	10	12944
40 x 20 x 6	100	40 m/s	19000 rpm	10	12945
40 x 20 x 6	120	40 m/s	19000 rpm	10	12946
40 x 20 x 6	150	40 m/s	19000 rpm	10	12947
40 x 20 x 6	180	40 m/s	19000 rpm	10	12948
40 x 20 x 6	240	40 m/s	19000 rpm	10	12949
40 x 20 x 6	320	40 m/s	19000 rpm	10	12950
50 x 5 x 6	60	40 m/s	15200 rpm	10	135235
50 x 5 x 6	80	40 m/s	15200 rpm	10	136451
50 x 5 x 6	120	40 m/s	15200 rpm	10	251778
50 x 10 x 6	40	40 m/s	15200 rpm	10	12960
50 x 10 x 6	60	40 m/s	15200 rpm	10	12961
50 x 10 x 6	80	40 m/s	15200 rpm	10	12962
50 x 10 x 6	120	40 m/s	15200 rpm	10	12964
50 x 10 x 6	150	40 m/s	15200 rpm	10	12965
50 x 10 x 6	240	40 m/s	15200 rpm	10	12967
50 x 15 x 6	40	40 m/s	15200 rpm	10	12978
50 x 15 x 6	60	40 m/s	15200 rpm	10	12979
50 x 15 x 6	80	40 m/s	15200 rpm	10	12980
50 x 15 x 6	120	40 m/s	15200 rpm	10	12982
50 x 15 x 6	240	40 m/s	15200 rpm	10	12985
50 x 20 x 6	40	40 m/s	15200 rpm	10	12996
50 x 20 x 6	60	40 m/s	15200 rpm	10	12997
50 x 20 x 6	80	40 m/s	15200 rpm	10	12998
50 x 20 x 6	100	40 m/s	15200 rpm	10	12999
50 x 20 x 6	120	40 m/s	15200 rpm	10	13000
50 x 20 x 6	150	40 m/s	15200 rpm	10	13001
50 x 20 x 6	180	40 m/s	15200 rpm	10	13002
50 x 20 x 6	240	40 m/s	15200 rpm	10	13003
50 x 20 x 6	320	40 m/s	15200 rpm	10	13004
50 x 30 x 6	40	40 m/s	15200 rpm	10	61282
50 x 30 x 6	60	40 m/s	15200 rpm	10	61299
50 x 30 x 6	80	40 m/s	15200 rpm	10	61319
50 x 30 x 6	100	40 m/s	15200 rpm	10	61333
50 x 30 x 6	120	40 m/s	15200 rpm	10	61350
50 x 30 x 6	150	40 m/s	15200 rpm	10	71015
50 x 30 x 6	180	40 m/s	15200 rpm	10	61371
50 x 30 x 6	240	40 m/s	15200 rpm	10	71017
50 x 30 x 6	320	40 m/s	15200 rpm	10	61389
60 x 15 x 6	40	40 m/s	12700 rpm	10	13014
60 x 15 x 6	60	40 m/s	12700 rpm	10	13015
60 x 15 x 6	80	40 m/s	12700 rpm	10	13016
60 x 15 x 6	120	40 m/s	12700 rpm	10	13018
60 x 15 x 6	150	40 m/s	12700 rpm	10	13019
60 x 15 x 6	240	40 m/s	12700 rpm	10	13021
60 x 20 x 6	40	40 m/s	12700 rpm	10	13032
60 x 20 x 6	60	40 m/s	12700 rpm	10	13033
60 x 20 x 6	80	40 m/s	12700 rpm	10	13034



Small abrasive mop

Abrasive mop



►► Continuation of KM 613, Small abrasive mop

Diameter x Width x Shaft in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
60 x 20 x 6	120	40 m/s	12700 rpm	10	13036
60 x 20 x 6	180	40 m/s	12700 rpm	10	13038
60 x 20 x 6	240	40 m/s	12700 rpm	10	13039
60 x 30 x 6	40	40 m/s	12700 rpm	10	13050
60 x 30 x 6	60	40 m/s	12700 rpm	10	13051
60 x 30 x 6	80	40 m/s	12700 rpm	10	13052
60 x 30 x 6	100	40 m/s	12700 rpm	10	13053
60 x 30 x 6	120	40 m/s	12700 rpm	10	13054
60 x 30 x 6	150	40 m/s	12700 rpm	10	13055
60 x 30 x 6	180	40 m/s	12700 rpm	10	13056
60 x 30 x 6	240	40 m/s	12700 rpm	10	13057
60 x 30 x 6	320	40 m/s	12700 rpm	10	13058
60 x 40 x 6	40	40 m/s	12700 rpm	10	13068
60 x 40 x 6	60	40 m/s	12700 rpm	10	13069
60 x 40 x 6	80	40 m/s	12700 rpm	10	13070
60 x 40 x 6	100	40 m/s	12700 rpm	10	13071
60 x 40 x 6	120	40 m/s	12700 rpm	10	13072
60 x 40 x 6	150	40 m/s	12700 rpm	10	13073
60 x 40 x 6	240	40 m/s	12700 rpm	10	13075
60 x 50 x 6	40	32 m/s	10150 rpm	10	13086
60 x 50 x 6	60	32 m/s	10150 rpm	10	13087
60 x 50 x 6	80	32 m/s	10150 rpm	10	13088
60 x 50 x 6	120	32 m/s	10150 rpm	10	13090
60 x 50 x 6	180	32 m/s	10150 rpm	10	13092
80 x 15 x 6	40	40 m/s	9500 rpm	10	13104
80 x 15 x 6	60	40 m/s	9500 rpm	10	13105
80 x 15 x 6	80	40 m/s	9500 rpm	10	13106
80 x 15 x 6	120	40 m/s	9500 rpm	10	13108
80 x 15 x 6	150	40 m/s	9500 rpm	10	13109
80 x 15 x 6	240	40 m/s	9500 rpm	10	13111
80 x 20 x 6	40	40 m/s	9500 rpm	10	13122
80 x 20 x 6	60	40 m/s	9500 rpm	10	13123
80 x 20 x 6	80	40 m/s	9500 rpm	10	13124
80 x 20 x 6	120	40 m/s	9500 rpm	10	13126
80 x 30 x 6	40	40 m/s	9500 rpm	10	13140
80 x 30 x 6	60	40 m/s	9500 rpm	10	13141
80 x 30 x 6	80	40 m/s	9500 rpm	10	13142
80 x 30 x 6	120	40 m/s	9500 rpm	10	13144
80 x 30 x 6	150	40 m/s	9500 rpm	10	13145
80 x 30 x 6	240	40 m/s	9500 rpm	10	13147
80 x 30 x 6	320	40 m/s	9500 rpm	10	13148
80 x 40 x 6	40	40 m/s	9500 rpm	10	13158
80 x 40 x 6	60	40 m/s	9500 rpm	10	13159
80 x 40 x 6	80	40 m/s	9500 rpm	10	13160
80 x 40 x 6	120	40 m/s	9500 rpm	10	13162
80 x 50 x 6	40	32 m/s	7650 rpm	10	13176
80 x 50 x 6	60	32 m/s	7650 rpm	10	13177
80 x 50 x 6	80	32 m/s	7650 rpm	10	13178
80 x 50 x 6	100	32 m/s	7650 rpm	10	13179



Small abrasive mop


Abrasive mop

► Continuation of KM 613, Small abrasive mop

Diameter x Width x Shaft in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
80 x 50 x 6	120	32 m/s	7650 rpm	10	13180
80 x 50 x 6	150	32 m/s	7650 rpm	10	13181
80 x 50 x 6	240	32 m/s	7650 rpm	10	13183
80 x 50 x 6	320	32 m/s	7650 rpm	10	13184

Small abrasive mop

KM 615



Properties

Bonding agent Resin

Grain Aluminium oxide

Applications:

Stainless steel ●

Advantages: Cool grinding due to multibond - Increased removal rate on stainless steel



Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Width x Shaft in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
30 x 10 x 6	60	40 m/s	25400 rpm	10	253615
30 x 10 x 6	80	40 m/s	25400 rpm	10	253620
30 x 10 x 6	120	40 m/s	25400 rpm	10	253610
40 x 20 x 6	60	40 m/s	19000 rpm	10	253616
40 x 20 x 6	80	40 m/s	19000 rpm	10	253621
40 x 20 x 6	120	40 m/s	19000 rpm	10	253611
50 x 20 x 6	60	40 m/s	15200 rpm	10	253617
60 x 30 x 6	60	40 m/s	12700 rpm	10	253618
60 x 30 x 6	80	40 m/s	12700 rpm	10	253623
80 x 40 x 6	60	40 m/s	9500 rpm	10	253619
80 x 40 x 6	80	40 m/s	9500 rpm	10	253624


Small abrasive mop

Abrasive mop



Small abrasive mop, cup-shaped

KMT 614



Properties

Bonding agent Resin	
Grain	Aluminium oxide

Applications:

Metals	●
Wood	○
Plastic	○

Advantages: Can be used in radial and front position

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Width x Shaft in mm	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
60 x 40 x 6	40	40 m/s	12700 rpm	10	13194
60 x 40 x 6	60	40 m/s	12700 rpm	10	13195



Non-woven products

About the product

Thanks to its open, elastic structure, a non-woven abrasive web is capable of applying "soft" sanding to produce surfaces with a low scratch depth that are particularly fine. Fully and evenly interspersed with abrasive grain, a non-woven abrasive web can be used to produce a uniform and reproducible scratch pattern while also delivering a long service life.

Thanks to the great many beneficial properties of the material, the importance of non-woven products in the field of surface finishing is increasing steadily, especially for the work step of "finishing stainless steel surfaces".

Carrying an extensive variety of products with differences in fibre structure, grain, grit, bond and density, Klingspor offers the right abrasive tool for every processing step - from light deburring and stock removal to cleaning and creating satin finishes to the polishing of surfaces.

			Machines											Material applications								
Work step	Type	Tool type	Angle grinder	Drilling machine	Die grinder	Flexible shaft grinder	Back stand grinding machine	Hand tool belt grinder	Right angle die grinder	Orbital sander	Satin finishing machine	Floor standing grinder	Random orbital sander	Fillet weld grinder	Hand sanding	Stainless Steel	Steel	NF metals	Varnish	Plastic	Wood	Page
Light sanding and creating satin finishes	SMT 850 plus	Combi-abrasive mop disc	●													●	○					220
	SMT 800	Non-woven mop disc	●													●	●	●				220
	SV 484	SCM non-woven web disc (universal)	●													●	●	●	○			208
	NDS 800	SCM non-woven web disc (hard, edge)	●													●	●	●	○			209
	NBS 800	SCM non-woven web belt					●									●	●	●				207
	NBF 800	SCM non-woven file belt						●								●	●	●				206
	QMC/QRC 800	SCM Quick Change Disc							●							●	●	●				211, 213
Coarse cleaning, removal of coatings	PW 2000	Power wheel		●	●	●										●	●	○	●			223
	NCD 200	Coarse cleaning disc	●													●	●	○	●			222
	NCD 200 HD	Coarse cleaning disc HD	●													●	●	○	○			222
	QRC 200 HD	Coarse cleaning QCD							●							●	●	○	○			214
Finishing and creating matt finishes	NRO 400	Non-woven web roll, aluminium oxide								●					●	●	●	●	○	○	○	204
	NRO 500	Non-woven web roll, SiC								●					●	●	○	○	●	●	○	205
	NPA 400	Non-woven hand pad, aluminium oxide								●					●	●	●	●	○	○	○	205
	NPA 500	Non-woven hand pad, SiC								●					●	●	○	○	●	●	○	206
	NFW 600 S	Non-woven finishing wheel									●					●	●	●		○		217
	NCW 600 S	Non-woven combi finishing wheel									●					●	●	●		○		217
	NFW 600	Non-woven finishing wheel										●				●	●	●		○		216
	NCW 600	Non-woven combi finishing wheel										●				●	●	●		○		216
	NDS 400 K	Non-woven self-adhesive disc											●			●	●	●	●	●	○	208
	QMC/QRC 400	Non-woven QCD							●							●	●	●	○	○		211, 212
	NFS 600	Non-woven mounted wheel		●	●	●										●	●	●		○		219
	NCS 600	Combi non-woven mounted wheel		●	●	●										●	●	●		○		218
Removal of heat tinting, pre-polishing	NUD 500	Unitised compact disc	●													●	●	●				221
	MFW 600	Unitised compact disc / wheel	●											●		●	●	●				221
	QRC 500	Unitised compact QCD							●							●	●	●				213

● = main application ○ = possible application

Non-woven products

Applications guide

Types of non-woven material

When trying to find the product that is right for your application, you will want to factor in the properties of the non-woven material.

Non-woven material is divided into four different categories:

- ▶ Soft non-woven material without fabric lining (clean and finish)
- ▶ Non-woven material with fabric lining (Surface Conditioning Material – SCM)
- ▶ Highly compacted fleece (unitised and convolute)
- ▶ Coarse cleaning fleece (clean and strip)

General benefits of non-woven materials

Wide range of applications for finishing

- ▶ The products are available with various grains and densities

Exceptionally long service life

- ▶ Continuous release of new abrasive grains
- ▶ Even finish throughout the entire service life
- ▶ No clogging thanks to open structure

Uniform scratch pattern

- ▶ Abrasive grains are distributed evenly in the material structure
- ▶ No excessive penetration into the workpiece surface

Perfect contouring to the workpiece

- ▶ The structure of non-woven materials is exceedingly flexible
- ▶ Shape and geometry of the base material remain unchanged

Finishing processes, typical work steps



Light sanding and creating satin finishes

Light stock removal combined with an excellent finish. The right choice: Non-woven tools made of SCM non-woven material with fabric lining (e.g. belts, discs) or combinations with non-woven and coated abrasives (e.g. SMT 850).



Coarse cleaning

Removal of rust, scale and varnish as well as coatings in general and effortless removal of heat tinting. The right choice: Non-woven tools made of coarse cleaning fleece with an extra open structure, relatively strong non-woven fibres and coarse abrasive grain.



Finishing and creating matt finishes

Blending scratch patterns, cleaning surfaces and creating a final finish; no stock removal. The right choice: Tools, often including tools for off-hand sanding, made of soft, flexible non-woven material.



Removal of heat tinting and pre-polishing

Removal of heat tinting and/or creation of surfaces with a low scratch depth that are particularly fine. The right choice: Tools made of highly compacted fleece. Depending on its density and degree of fineness, the non-woven material may even allow for light stock removal or light deburring.

Non-woven products

Applications guide



Non-woven nylon material in four different shapes

Non-woven material without fabric lining



NCW 600 (S)



NFW 600 (S)



NDS 400 K



QMC / QRC 400



NPA 400 / 500



NRO 400 / 500



NCS 600



NFS 600

Non-woven material with fabric lining



SMT 800 SPECIAL



SMT 850 plus SPECIAL



NBS 800



NBF 800



SV 484



NDS 800



QMC / QRC 800

Highly compacted fleece



MFW 600



NUD 500



QRC 500

Coarse cleaning fleece



PW 2000



NCD 200



QRC 200 HD



NCD 200 HD

Non-woven products

Applications guide

Rolls and sheets

Minimum order quantities for made to order items

Format/style	Product	Width	Minimum order quantity
Rolls	NRO 400 / 500	Dimensions and quantities on request	
Sheets	NPA 400 / 500	Dimensions and quantities on request	



Grit chart

Grit		80 - 100	120 - 150	180 - 220	240 - 320	800 - 1000	without grain
Grade		coarse	medium	fine	very fine	ultra fine	non-abrasive
Klingspor Non-woven web hand pads and rolls	Aggressiveness decreasing ↓	coarse A – brown					
			medium SiC – black				
			medium A – maroon				
				fine A – maroon			
					very fine HD – green		
					very fine GP – dark green		
						very fine A – maroon	
							ultra fine SiC – grey
							non-abrasive – white



Belts

Minimum order quantities for
made to order items

Format/style	Product	Width	Minimum order quantity
Belts	NBF 800	6 – 13 mm	20 pieces
		14 – 30 mm	10 pieces
	NBS 800	31 – 75 mm	5 pieces
		76 – 320 mm	2 pieces


The minimum length for non-woven belts is 295mm. We reserve the right to over-deliver or under-deliver production items.




Grit chart

Grit		60 - 80	120 - 150	180 - 240
Grade		coarse	medium	very fine
Klingspor Non-woven web belts	Aggressiveness decreasing ↓	coarse A – brown		
			medium A – purple	
				very fine – blue

Belt joints for non-woven belts

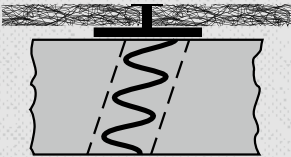

Form 3 W
Zig-zag butt joint with fabric tape on the rear and additional joint connection on the front. Standard joint for product type NBS 800.

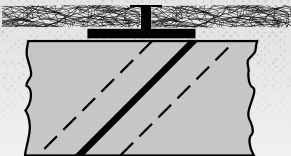

Form 4 W
Bevel cut, butt joint, with fabric tape on the rear and bonding on the face side. Special joint for non-woven file belts, product type NBF 800.

Quick Change Discs

Minimum order quantities for
made to order items

Format/style	Product	Diameter	Minimum order quantity
Quick Change Discs	QRC/QMC 800	38 mm	400 pieces
		50 mm	350 pieces
		76 mm	350 pieces
	QRC/QMC 400	38 mm	700 pieces
		50 mm	500 pieces
		76 mm	375 pieces

We reserve the right to over-deliver or under-deliver production items.




Grit chart for QRC/QMC 800

Grit		60 - 80	120 - 150	180 - 240
Grade		coarse	medium	very fine
Klingspor Quick Change Discs	Aggressiveness decreasing ↓	coarse A – brown		
			medium A – purple	
				very fine – blue

Abrasive mop

Minimum order quantities for made to order items

Format/style	Product	Diameter	Minimum order quantity
Mop	NFW 600 / NCW 600	100 – 165 mm	20 pieces
		200 – 300 mm	10 pieces
	NFW 600 S / NCW 600 S	100 – 110 mm	20 pieces
Small abrasive mop	NCS 600 / NFS 600	30,40,50,60 mm	150 pieces
		80, 100 mm	100 pieces



- a Outer diameter side cover
- b Hole side cover
- c Outer diameter mop

Mop side cover and hole relative to the outer mop diameter*

Type	Mop wheel outer Ø [mm]	Metal side cover		Matching clamping flange SMD 612
		Outer Ø [mm]	Hole [mm]	
NCW/NFW 600	165	82	43,1	14823
	200-250	125	68,2	14824
	300	158	97,8	14826

* applies to standard versions (stock items)

Non-woven web

Rolls

Non-woven web roll

NRO 400



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Stainless steel	●	Paint/Varnish/Filler	①
Metals	●		
Wood	●		
Plastic	①		

Advantages: Very good adaptation to surface contours - No clogging - Ideal for smoothing, cleaning, roughening and for general surface finishing - Can be used wet and dry

Width x Length in mm	Colour	Grade	Packing unit/pcs.	Cat. number
100 x 10000	maroon	medium	1	258870
100 x 10000	maroon	fine	1	258872
100 x 10000	dark green	very fine general purpose	1	258871
100 x 10000	maroon	very fine	1	258873
115 x 10000	maroon	medium	1	258885
115 x 10000	maroon	fine	1	258887
115 x 10000	dark green	very fine general purpose	1	258886
115 x 10000	maroon	very fine	1	258888
150 x 10000	maroon	medium	1	258890
150 x 10000	maroon	fine	1	258892
150 x 10000	dark green	very fine general purpose	1	258891
150 x 10000	maroon	very fine	1	258893

Information regarding grit range see chart on page 200.

Non-woven web

Rolls / Pads



Non-woven web roll

NRO 500



Properties

Bonding agent	Resin
Grain	SiC

Applications:

Stainless steel	●	Wood	●
Plastic	●		
Paint/Varnish/Filler	●		
Metals	●		

Advantages: Very good adaptation to surface contours - No clogging - Ideal for smoothing, cleaning, roughening and for general surface finishing - Can be used wet and dry

Width x Length in mm	Colour	Grade	Packing unit/pcs.	Cat. number
100 x 10000	black	medium	1	260365
100 x 10000	grey	ultra fine	1	258874
115 x 10000	black	medium	1	260366
115 x 10000	grey	ultra fine	1	258889
150 x 10000	black	medium	1	260367
150 x 10000	grey	ultra fine	1	258894

Information regarding grit range see chart on page 200.

Non-woven web hand pad

NPA 400



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Stainless steel	●	Plastic	●
Metals	●		
Wood	●		
Paint/Varnish	●		

Advantages: Outstanding for surface finishing, e.g. adaptation to an existing surface scratch pattern - Can be used wet and dry

Width x Length in mm	Colour	Grade	Packing unit/pcs.	Cat. number
152 x 229	brown	coarse	20	342852
152 x 229	maroon	medium	20	342855
152 x 229	maroon	fine	20	342856
152 x 229	maroon	very fine	20	342849
152 x 229	green	very fine heavy duty	20	342853
152 x 229	dark green	very fine general purpose	20	342854

Information regarding grit range see chart on page 200.

Non-woven web

Pads / Belts

Non-woven web hand pad

NPA 500



Properties

Bonding agent	Resin
Grain	SiC

Applications:

Paint/Varnish	●
Plastic	●
Stainless steel	●
Metals	⦿

Wood	⦿
------	---

Advantages: Outstanding for surface finishing, e.g. adaptation to an existing surface scratch pattern - Can be used wet and dry

Width x Length in mm	Colour	Grade	Packing unit/pcs.	Cat. number
152 x 229	black	medium	20	342857
152 x 229	grey	ultra fine	20	342851
152 x 229	white	without grain	20	342850

Information regarding grit range see chart on page 200.

SCM file belt

NBF 800



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Stainless steel	●
NF metals	●
Metals	⦿

Advantages: Special product for surface finishing with hand tool belt grinders - Ideal for removal of discolorations, for light deburring, leveling, matt finishing and roughening - Minimal clogging and long service life - Suitable for dry and wet grinding

Width x Length in mm	Belt joint	Colour	Grade	Packing unit/pcs.	Cat. number
6 x 520	F4W	brown	coarse	10	258646
6 x 520	F4W	maroon	medium	10	258647
6 x 520	F4W	blue	very fine	10	258648
9 x 533	F4W	brown	coarse	10	258652
9 x 533	F4W	maroon	medium	10	258653
9 x 533	F4W	blue	very fine	10	258654
10 x 330	F4W	brown	coarse	10	258655
10 x 330	F4W	maroon	medium	10	258656
10 x 330	F4W	blue	very fine	10	258657
12 x 520	F4W	brown	coarse	10	258658
12 x 520	F4W	maroon	medium	10	258659
12 x 520	F4W	blue	very fine	10	258660
12 x 533	F4W	brown	coarse	10	258661
12 x 533	F4W	maroon	medium	10	258662




►► Continuation of NBF 800, SCM File belt

Width x Length in mm	Belt joint	Colour	Grade	Packing unit/pcs.	Cat. number
12 x 533	F4W	blue	very fine	10	258663
13 x 457	F4W	brown	coarse	10	258664
13 x 457	F4W	maroon	medium	10	258665
13 x 457	F4W	blue	very fine	10	258666
13 x 610	F4W	brown	coarse	10	258667
13 x 610	F4W	maroon	medium	10	258668
13 x 610	F4W	blue	very fine	10	258669
20 x 520	F4W	brown	coarse	10	258671
20 x 520	F4W	maroon	medium	10	258672
20 x 520	F4W	blue	very fine	10	258673
28 x 533	F4W	brown	coarse	10	258674
28 x 533	F4W	maroon	medium	10	258695
28 x 533	F4W	blue	very fine	10	258696
30 x 533	F4W	brown	coarse	5	258699
30 x 533	F4W	maroon	medium	5	258700
30 x 533	F4W	blue	very fine	5	258701
30 x 610	F4W	maroon	medium	5	258703
30 x 610	F4W	blue	very fine	5	258704

Information regarding grit range see chart on page 201.

SCM standard belt

NBS 800



Properties

Bonding agent Resin	
Grain	Aluminium oxide

Applications:

Stainless steel	●
NF metals	●
Metals	○

Advantages: Special product for surface finishing with hand-operated machines (except hand tool belt grinders) and stationary machines - Ideal for removal of discolorations, for light deburring, leveling, matte finishing and roughening - Minimal clogging - Long service life - Suitable for dry and wet grinding

Width x Length in mm	Belt joint	Colour	Grade	Packing unit/pcs.	Cat. number
30 x 800	F3W	violet	medium	5	258706
40 x 618	F3W	brown	coarse	5	258711
40 x 618	F3W	violet	medium	5	258712
40 x 618	F3W	blue	very fine	5	258713
40 x 820	F3W	brown	coarse	5	258714
40 x 820	F3W	violet	medium	5	258715
40 x 820	F3W	blue	very fine	5	258716
50 x 450	F3W	brown	coarse	5	258717
50 x 450	F3W	violet	medium	5	258718
75 x 2000	F3W	brown	coarse	5	258729
75 x 2000	F3W	violet	medium	5	258730
75 x 2000	F3W	blue	very fine	5	258731

Information regarding grit range see chart on page 201.

Non-woven web

Discs

Non-woven web disc, self-fastening

NDS 400 K



Properties

Bonding agent	Resin
Grain	Aluminium oxide/SiC
Backing	Non-woven web

Applications:

Metals	●	Paint/Varnish/Filler	●
Steel	●		
Stainless steel	●		
Plastic	●		

Advantages: Creates an omnidirectional, ultra-fine satin finish on stainless steel surfaces - Effortless cleaning of metal surfaces - Removal of thin layers of oxidation on NF metal - Preparation of surfaces for subsequent coating - Roughening of painted and plastic surfaces - Available in ultra fine (SiC) and very fine (Aluminium oxide)

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Colour	Grade	Packing unit/pcs.	Cat. number
150	320	maroon	very fine	20	342640
150	600	grey	ultra fine	20	342641

SCM disc

SV 484



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Backing	SCM Non-woven web

Applications:

Paint/Varnish/Filler	●	Stainless steel	●
Wood	●		
Plastic	●		
Metals	●		

Advantages: Universal non-woven web disc with outstanding price-performance ratio - Soft and elastic grinding - Can be used wet and dry - With center hole for easy mounting, secure hold and smooth running on backing plates with centering - Also suited for backing pads without centering and fiber discs backing plates with clamping screw

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Bore in mm	Grit	Grade	Packing unit/pcs.	Cat. number
115 x 22	80	coarse	10	353413
115 x 22	100	medium	10	353415
115 x 22	180	medium	10	353409
115 x 22	280	very fine	10	353410
125 x 22	80	coarse	10	353414
125 x 22	100	medium	10	353416
125 x 22	180	medium	10	353411
125 x 22	280	very fine	10	353412

Non-woven web

Discs / Backing pads



SCM disc

NDS 800



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Backing	SCM Non-woven web

Applications:

Metals	●	Wood	●
Stainless steel	●		
Paint/Varnish/Filler	○		
Plastic	○		

Advantages: High edge stability - Aggressive abrasive behaviour - Long service life - Can be used for wet and dry grinding - With expressible center hole for easy mounting, secure hold and smooth running on backing plates with centering - Also suited for backing pads without centering and fiber discs backing plates with clamping screw

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Bore in mm	Grit	Colour	Grade	Packing unit/pcs.	Cat. number
115 x 22	50	brown	coarse	10	320103
115 x 22	100	maroon	medium	10	320104
115 x 22	180	blue	very fine	10	320105
125 x 22	50	brown	coarse	10	320106
125 x 22	100	maroon	medium	10	320107
125 x 22	180	blue	very fine	10	320108

Backing pad for SCM discs

NDS 555



Advantages: Good adhesion for non-woven web discs - For medium-duty grinding and polishing

Diameter in mm	Thread/Shaft	Packing unit/pcs.	Cat. number
115	thread M14	1	164100
125	thread M14	1	208275

Non-woven web

Backing pads

Backing pad for SCM discs with center hole

NDS 555 C



NEW !



Advantages: Easy and always centric positioning of the non-woven web discs - Good adhesion due to special self-fastening hooks - Less vibrations, stable running - No loosening of the discs, even with decreasing adhesion - Adaptable, for surfaces and light contours

Diameter in mm	Thread/Shaft	Suitable for	Max. RPM	Packing unit/pcs.	Cat. number
115	thread M14	Diameter 115 x 22	13300 rpm	1	358126
125	thread M14	Diameter 125 x 22	12200 rpm	1	358127


Non-woven web

Quick Change Discs



Non-woven web quick change disc

QMC 400



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Backing	Non-woven web

Applications:

Paint/Varnish/Filler	●
Stainless steel	●
Metals	○


Advantages: Suitable for surface finishing work - For cleaning work on metals and painted surfaces

Diameter in mm	Colour	Grade	Packing unit/pcs.	Cat. number
50	bordeaux	medium	50	295392
50	bordeaux	fine	50	295393
50	bordeaux	very fine	50	295394

Backing pad see page 212 /Adapter see page 215. Information regarding grit range see chart on page 202.

SCM quick change disc

QMC 800



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Backing	SCM Non-woven web

Applications:

Metals	●
Stainless steel	●
Paint/Varnish/Filler	○

Advantages: For light deburring - For removal of rust and paint - Long life due to hard, stable quality of surface conditioning material

Diameter in mm	Colour	Grade	Packing unit/pcs.	Cat. number
50	brown	coarse	50	295410
50	violet	medium	50	295411
50	blue	very fine	50	295412
76	violet	medium	25	295417
76	blue	very fine	25	295418


Backing pad see page 212 /Adapter see page 215. Information regarding grit range see chart on page 202.

Non-woven web

Quick Change Discs / Backing pads

Backing pad

QMC 555




Advantages: For secure mounting of QMC discs - Optimized abrasive properties (aggressiveness, surface quality) due to three hardnesses

Diameter x Shaft in mm	Density	Colour	Max. RPM	Packing unit/pcs.	Cat. number
25 x 6	medium	blue	30000 rpm	1	295422
38 x 6	soft	grey	30000 rpm	1	300058
38 x 6	medium	blue	30000 rpm	1	295424
38 x 6	firm	red	30000 rpm	1	300059
50 x 6	soft	grey	30000 rpm	1	300060
50 x 6	medium	blue	30000 rpm	1	295426
50 x 6	firm	red	30000 rpm	1	295427
76 x 6	soft	grey	20000 rpm	1	300061
76 x 6	medium	blue	20000 rpm	1	295430
76 x 6	firm	red	20000 rpm	1	295431

Non-woven web quick change disc

QRC 400



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Backing	Non-woven web

Applications:

Paint/Varnish/Filler	●
Stainless steel	●
Metals	○



Advantages: Suitable for surface finishing work - For cleaning work on metals and painted surfaces

All sizes and minimum purchasing quantities available on request

Backing pad see page 215 /Adapter see page 215. Information regarding grit range see chart on page 202.

SCM quick change disc

QRC 800

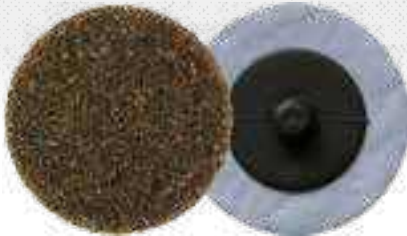

Properties

Bonding agent	Resin
Grain	Aluminium oxide
Backing	SCM Non-woven web

Applications:

Metals	●
Stainless steel	●
Paint/Varnish/Filler	○

Advantages: For light deburring - For removal of rust and paint - Long life due to hard, stable quality of surface conditioning material

Diameter in mm	Colour	Grade	Packing unit/pcs.	Cat. number
50	brown	coarse	50	295413
50	violet	medium	50	295414
50	blue	very fine	50	295415
76	brown	coarse	25	295419
76	violet	medium	25	295420

Backing pad see page 215 /Adapter see page 215. Information regarding grit range see chart on page 202.

Unitized Quick Change Discs

QRC 500



Properties

Bonding agent	Resin
Grain	Aluminium oxide/SiC
Backing	Compressed non-woven web layers

Applications:

Stainless steel	●	NF metals	●
Titanium	●	Aluminium	●
Steel	●		
High alloy steel	●		

Advantages: Very long service life - Very fine, constant and brilliant surface pattern - Versatile, depending on density and structure (removal to polishing) - Very suitable for hard-to-reach areas (e.g. inside corners) - Can be used on the face and surface - Free of metallic ingredients

NEW !

Diameter in mm	Colour	Grade	Density	Packing unit/pcs.	Cat. number
51	grey	fine	2 SF soft	10	358978
51	grey	fine	3 SF medium soft	10	358981
51	grey	fine	6 SF hard	10	358979
51	maroon	coarse	8 AC very hard	10	358980
76	grey	fine	2 SF soft	5	358982
76	grey	fine	3 SF medium soft	5	358985
76	grey	fine	6 SF hard	5	358983
76	maroon	coarse	8 AC very hard	5	358984

Backing pad see page 215 /Adapter see page 215.

Non-woven web

Quick Change Discs

Quick Change Disc, Clean and Strip

QRC 200 HD

NEW



Properties

Bonding agent	Resin
Grain	Ceramic coated aluminium oxide
Backing	Coarse cleaning fleece

Applications:

Stainless steel	●
Steel	●
NF metals	●
Paint/Varnish/Filler	●


Advantages: Hard, aggressive cleaning fleece for heavy-duty use - Open structure, no clogging and cool grinding - Fast work progress and long service life - No change in workpiece geometry in metal applications - Can be used on the face and surface

Diameter in mm	Colour	Grade	Packing unit/pcs.	Cat. number
51	green	extra coarse	10	358993
76	green	extra coarse	5	358994

Backing pad see page 215 /Adapter see page 215.

Backing pad

QRC 555



Advantages: For secure mounting of QRC discs - Optimized abrasive properties (aggressiveness, surface quality) due to two hardnesses

Diameter x Shaft in mm	Density	Colour	Max. RPM	Packing unit/pcs.	Cat. number
25 x 6	medium	blue	30000 rpm	1	295423
38 x 6	medium	blue	30000 rpm	1	295425
50 x 6	medium	blue	30000 rpm	1	295428
50 x 6	firm	red	30000 rpm	1	295429
76 x 6	medium	blue	20000 rpm	1	295432
76 x 6	firm	red	20000 rpm	1	295433

Adapter for quick change disc backing pad

QCA 555



Advantages: Quick Change Disc adapter with M14 thread - Allows use of quick change discs on a regular angle grinder


Width x Length in mm	Thread/Shaft	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
20 x 30	thread M14	80 m/s	75400 rpm	1	308693

Non-woven web

Abrasive mop

Combi non-woven web mop

NCW 600



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Stainless steel	●
Metals	●
Plastic	○


Advantages: Combination of non-woven and abrasive cloth flaps for a fine surface scratch pattern - Optimal wear properties - High removal rate - Long service life

Diameter x Width x Bore in mm	Grit	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
165 x 50 x 43,1	80	coarse	maroon	32 m/s	3700 rpm	3	258909
165 x 50 x 43,1	100	medium	maroon	32 m/s	3700 rpm	3	258910
165 x 50 x 43,1	150	medium	maroon	32 m/s	3700 rpm	3	258911
165 x 50 x 43,1	180	very fine	maroon	32 m/s	3700 rpm	3	258912
200 x 50 x 68,2	80	coarse	maroon	32 m/s	3050 rpm	2	258913
200 x 50 x 68,2	100	medium	maroon	32 m/s	3050 rpm	2	258914
200 x 50 x 68,2	150	medium	maroon	32 m/s	3050 rpm	2	258915

Use only with mounting plate SMD 612 (page 183)!

Finishing mop

NFW 600



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Metals	●
Stainless steel	●

Advantages: Even finish throughout the entire service life - Optimal tool for creating a matt or satin finish

Diameter x Width x Bore in mm	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
165 x 50 x 43,1	coarse	maroon	32 m/s	3700 rpm	3	258898
165 x 50 x 43,1	medium	maroon	32 m/s	3700 rpm	3	258899
165 x 50 x 43	very fine	maroon	32 m/s	3700 rpm	3	258900
200 x 50 x 68,2	coarse	maroon	32 m/s	3050 rpm	2	258901
200 x 50 x 68,2	medium	maroon	32 m/s	3050 rpm	2	258902
200 x 50 x 68,2	very fine	maroon	32 m/s	3050 rpm	2	258903

Use only with mounting plate SMD 612 (page 183)!

Non-woven web

Abrasive mop



Combi non-woven web drum

NCW 600 S



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Stainless steel	●
Metals	●
Plastic	○



Advantages: High removal rate and fine surface scratch pattern due to combination of non-woven and abrasive cloth flaps - Long service life

Diameter x Width x Bore in mm	Grit	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 50 x 19	80	coarse	maroon	19 m/s	3700 rpm	3	259896
100 x 50 x 19	100	medium	maroon	19 m/s	3700 rpm	3	259897
100 x 50 x 19	150	medium	maroon	19 m/s	3700 rpm	3	259898
100 x 50 x 19	180	very fine	maroon	19 m/s	3700 rpm	3	259899
100 x 100 x 19	80	coarse	maroon	19 m/s	3700 rpm	1	258905
100 x 100 x 19	100	medium	maroon	19 m/s	3700 rpm	1	258906
100 x 100 x 19	150	medium	maroon	19 m/s	3700 rpm	1	258907
100 x 100 x 19	180	very fine	maroon	19 m/s	3700 rpm	1	258908
110 x 100 x 19	80	coarse	maroon	19 m/s	3300 rpm	1	320246
110 x 100 x 19	100	medium	maroon	19 m/s	3300 rpm	1	320247
110 x 100 x 19	150	medium	maroon	19 m/s	3300 rpm	1	320248

Non-woven web drum

NFW 600 S



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Metals	●
Stainless steel	●



Advantages: Even finish throughout the entire service life - Optimal tool with high quality non-woven flaps for creating a matt or satin finish

Diameter x Width x Bore in mm	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 50 x 19	coarse	maroon	19 m/s	3700 rpm	3	259853
100 x 50 x 19	medium	maroon	19 m/s	3700 rpm	3	259854
100 x 50 x 19	very fine	maroon	19 m/s	3700 rpm	3	259895
100 x 100 x 19	coarse	maroon	19 m/s	3700 rpm	1	258895
100 x 100 x 19	medium	maroon	19 m/s	3700 rpm	1	258896



Non-woven web


Abrasive mop

► Continuation of NFW 600 S, Non-woven web drum

Diameter x Width x Bore in mm	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 100 x 19	very fine	maroon	19 m/s	3700 rpm	1	258897
110 x 100 x 19	coarse	maroon	19 m/s	3300 rpm	1	320253
110 x 100 x 19	medium	maroon	19 m/s	3300 rpm	1	320254
110 x 100 x 19	very fine	maroon	19 m/s	3300 rpm	1	320255

Small finishing mop

NCS 600



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Stainless steel	●
Metals	●
Plastic	○

Advantages: High removal rate and fine surface scratch pattern due to combination of non-woven and abrasive cloth flaps - Long service life

Diameter x Width x Shaft in mm	Grit	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
50 x 30 x 6	60	coarse	maroon	32 m/s	12200 rpm	10	258932
50 x 30 x 6	100	medium	maroon	32 m/s	12200 rpm	10	258933
50 x 30 x 6	150	medium	maroon	32 m/s	12200 rpm	10	258934
50 x 30 x 6	240	very fine	maroon	32 m/s	12200 rpm	10	258935
60 x 30 x 6	60	coarse	maroon	32 m/s	10200 rpm	10	258936
60 x 30 x 6	100	medium	maroon	32 m/s	10200 rpm	10	258937
60 x 30 x 6	150	medium	maroon	32 m/s	10200 rpm	10	258938
60 x 30 x 6	240	very fine	maroon	32 m/s	10200 rpm	10	258939
60 x 50 x 6	60	coarse	maroon	32 m/s	10200 rpm	10	258940
60 x 50 x 6	100	medium	maroon	32 m/s	10200 rpm	10	258941
60 x 50 x 6	150	medium	maroon	32 m/s	10200 rpm	10	258942
60 x 50 x 6	240	very fine	maroon	32 m/s	10200 rpm	10	258943
80 x 50 x 6	60	coarse	maroon	32 m/s	7600 rpm	10	258944
80 x 50 x 6	100	medium	maroon	32 m/s	7600 rpm	10	258945
80 x 50 x 6	150	medium	maroon	32 m/s	7600 rpm	10	258946
80 x 50 x 6	240	very fine	maroon	32 m/s	7600 rpm	10	258947
100 x 50 x 6	60	coarse	maroon	32 m/s	6100 rpm	4	258948
100 x 50 x 6	100	medium	maroon	32 m/s	6100 rpm	4	258949
100 x 50 x 6	150	medium	maroon	32 m/s	6100 rpm	4	258950
100 x 50 x 6	240	very fine	maroon	32 m/s	6100 rpm	4	258951


Non-woven web

Abrasive mop



Small finishing mop

NFS 600



Properties

Bonding agent	Resin
Grain	Aluminium oxide

Applications:

Metals	●
Stainless steel	●

Advantages: Even finish throughout the entire service life - Optimal tool with high quality non-woven flaps for creating a matt or satin finish



Diameter x Width x Shaft in mm	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
50 x 30 x 6	coarse	maroon	32 m/s	12200 rpm	10	258917
50 x 30 x 6	medium	maroon	32 m/s	12200 rpm	10	258918
50 x 30 x 6	very fine	maroon	32 m/s	12200 rpm	10	258919
60 x 30 x 6	coarse	maroon	32 m/s	10200 rpm	10	258920
60 x 30 x 6	medium	maroon	32 m/s	10200 rpm	10	258921
60 x 30 x 6	very fine	maroon	32 m/s	10200 rpm	10	258922
60 x 50 x 6	coarse	maroon	32 m/s	10200 rpm	10	258923
60 x 50 x 6	medium	maroon	32 m/s	10200 rpm	10	258924
60 x 50 x 6	very fine	maroon	32 m/s	10200 rpm	10	258925
80 x 50 x 6	coarse	maroon	32 m/s	7600 rpm	10	258926
80 x 50 x 6	medium	maroon	32 m/s	7600 rpm	10	258927
80 x 50 x 6	very fine	maroon	32 m/s	7600 rpm	10	258928
100 x 50 x 6	coarse	maroon	32 m/s	6000 rpm	4	258929
100 x 50 x 6	medium	maroon	32 m/s	6000 rpm	4	258930
100 x 50 x 6	very fine	maroon	32 m/s	6000 rpm	4	258931

Non-woven web

Abrasive mop discs

Non-woven mop disc

SMT 800 SPECIAL



Applications:

Stainless steel	●
Steel	●

Properties

Backing plate	Glass fibre
Design	Convex 12°

Advantages: High quality non-woven mop disc for stainless steel finish work - Optimal results when used on variable speed angle grinders - Three grades

Diameter x Bore in mm	Form	Grade	Colour	Max. operating speed	Max. RPM	Recommended operating speed	Recommended RPM	Packing unit/pcs.	Cat. number
115 x 22,23		coarse	brown	80 m/s	13300 rpm	42 m/s	7000 rpm	5	278495
115 x 22,23		medium	maroon	80 m/s	13300 rpm	42 m/s	7000 rpm	5	278496
115 x 22,23		very fine	green	80 m/s	13300 rpm	42 m/s	7000 rpm	5	278497
125 x 22,23		coarse	brown	80 m/s	12200 rpm	42 m/s	6400 rpm	5	278498
125 x 22,23		medium	maroon	80 m/s	12200 rpm	42 m/s	6400 rpm	5	278499
125 x 22,23		very fine	green	80 m/s	12200 rpm	42 m/s	6400 rpm	5	278500

Combi-Abrasive mop disc

SMT 850 plus SPECIAL



Applications:

Stainless steel	●
-----------------	---

Properties


Backing plate	Glass fibre
Design	Convex 12°

Advantages: High-quality combi surface conditioning mop disc - Specially suited for machining of WIG weld seams on stainless steel components - Even finish throughout the entire service life - Stock removal and finishing in one step

Diameter x Bore in mm	Form	Grit	Grade	Colour	Max. operating speed	Max. RPM	Recommended operating speed	Recommended RPM	Packing unit/pcs.	Cat. number
115 x 22,23		60	coarse	brown	80 m/s	13300 rpm	42 m/s	7000 rpm	5	312556
115 x 22,23		80	medium	maroon	80 m/s	13300 rpm	42 m/s	7000 rpm	5	312557
115 x 22,23		120	very fine	green	80 m/s	13300 rpm	42 m/s	7000 rpm	5	312558
125 x 22,23		60	coarse	brown	80 m/s	12200 rpm	42 m/s	6400 rpm	5	312559
125 x 22,23		80	medium	maroon	80 m/s	12200 rpm	42 m/s	6400 rpm	5	312560
125 x 22,23		120	very fine	green	80 m/s	12200 rpm	42 m/s	6400 rpm	5	312561

Unitized wheel

MFW 600



Applications:

Steel	●
Stainless steel	●
NF metals	●

Properties

Bonding agent	Resin
Grain	SiC
Backing	Compressed non-woven web layers

Advantages: Special product for finishing stainless steel weld seams - 4 different grades for material removal up to high gloss

Diameter x Width x Bore in mm	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
125 x 6 x 22	coarse	red	59 m/s	9000 rpm	5	342218
125 x 6 x 22	medium	grey	59 m/s	9000 rpm	5	342219
125 x 6 x 22	fine	grey	39 m/s	5900 rpm	5	342237
150 x 3 x 25,4	coarse	red	59 m/s	7500 rpm	10	337948
150 x 3 x 25,4	medium	grey	59 m/s	7500 rpm	10	337949
150 x 3 x 25,4	fine	grey	39 m/s	5000 rpm	10	337950
150 x 6 x 25,4	coarse	red	59 m/s	7500 rpm	5	337944
150 x 6 x 25,4	medium	grey	59 m/s	7500 rpm	5	337945
150 x 6 x 25,4	fine	grey	39 m/s	5000 rpm	5	337946
150 x 6 x 25,4	very fine	grey	39 m/s	5000 rpm	5	337947

Unitized wheel

NUD 500



Applications:

Alloyed steels	●
High alloy steel	●
Non-ferrous metals	●
Light metals	●
Chrome and nickel steels	●
Steel	●
Titanium	●

Properties

Bonding agent	Resin
Grain	SiC
Backing	Compressed non-woven web layers

Advantages: For cleaning and pre-polishing surfaces - For smoothing weld seams - Fewer work steps - Precise cleaning, clearing and finishing of surfaces - Achieves an ultra-low scratch depth on the processed material

Diameter x Width x Bore in mm	Grade	Colour	Max. operating speed	Max. RPM	Recommended RPM	Packing unit/pcs.	Cat. number
115 x 13 x 22,23	coarse	grey	63 m/s	10450 rpm	5800 rpm	5	337864
115 x 13 x 22,23	medium	grey	63 m/s	10450 rpm	5800 rpm	5	337865
115 x 13 x 22,23	very fine	grey	63 m/s	10450 rpm	5800 rpm	5	337866
125 x 13 x 22,23	coarse	grey	63 m/s	9600 rpm	5300 rpm	5	337861
125 x 13 x 22,23	medium	grey	63 m/s	9600 rpm	5300 rpm	5	337862
125 x 13 x 22,23	very fine	grey	63 m/s	9600 rpm	5300 rpm	5	337863

Non-woven web

Clean and strip discs

Clean and strip disc, extra coarse

NCD 200



Applications:

Metals	●
Paint/Varnish/Filler	●
Plastic	●
Stainless steel	●

Properties

Bonding agent	Resin
Grain	SiC
Design	Flat

Advantages: Special SiC non-woven web for cleaning of surfaces and removal of heat tinting/blueing - No clogging due to open structure - For the removal of paint and rust

Diameter x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		63 m/s	10450 rpm	5	259043
125 x 22,23		63 m/s	9600 rpm	5	259044

Clean and strip disc, extra coarse

NCD 200 HD



NEW



Applications:

Stainless steel	●
Steel	●
NF metals	●
Paint/Varnish/Filler	●

Properties



Bonding agent	Resin
Grain	Ceramic coated aluminium oxide
Design	Flat

Advantages: Hard, aggressive non-woven version for higher loads - Open structure - No clogging - Cool grinding - Fast work progress and long service life - No change in workpiece contour

Diameter x Bore in mm	Form	Grade	Colour	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		extra coarse	green	63 m/s	10450 rpm	10	358003
125 x 22,23		extra coarse	green	63 m/s	9600 rpm	10	358004

Clean and Strip Power Wheel, extra coarse

PW 2000



Applications:

Paint/Varnish/Filler	●
Plastic	●
Metals	●
Stone	●

Advantages: Special non-woven web, ideal for removing heat tinting, oxide layers, rust and paint residue - For cleaning of weld seams - No clogging

Diameter x Width x Bore in mm	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 13 x 13	40 m/s	7600 rpm	10	194625
150 x 13 x 13	40 m/s	5000 rpm	10	194626
200 x 13 x 13	40 m/s	3800 rpm	10	241380

Fixing spindle

SD 2000



Advantages: For secure mounting on drilling machines, flexible shafts and stroke grinders and optimal true running of the grinding tool PW 2000

Shaft in mm	Suitable for	Packing unit/pcs.	Cat. number
6	1 wheel Ø 100 - Ø 200	1	194629
8	1-2 wheels Ø 100 - Ø 200	1	194632



Abrasive mop discs

About the product

Since their market launch, the Klingspor abrasive mop disc has successfully taken the place of the grinding disc in many areas of surface finishing.




















The performance of the abrasive mop disc, with its fan-shaped radial arrangement of cloth grinding flaps, far exceeds that of other abrasive products.

Klingspor abrasive mop discs are made of zirconia alumina, ceramic, or aluminium oxide coated flaps fastened to glass fibre-reinforced or plastic backing plates.

The even arrangement of the flaps guarantees high flexibility, constant high grinding performance and low vibrations.

Minimum order quantities for made to order items

Diameter	Minimum order quantities
up to 150 mm	320 pieces
180 mm	160 pieces

Type		Material								Application						Page
		Steel	Stainless steel	High alloy stainless steel	NF metals	Aluminium	Wood	Plastics	Paint / varnish / filler	Finish grinding	Welded seam work	Edge work; bevelling	Concave fillet weld work	Rust and varnish removal	Heat tinting and oxide film removal	
SMT 314 EXTRA		●			●	●	○				●	●				230
SMT 324 EXTRA		●	●	●						●						231
SMT 324 EXTRA		●	●	●							●	●				231
SMT 325 EXTRA		●	●	●						●						232
SMT 325 EXTRA		●	●	●							●	●				232
SMT 624 SUPRA		●	●	●							●	●				233
SMT 626 SUPRA		●	●	●							●	●				235
SMT 628 SUPRA		●	●	●						●						234
SMT 636 SUPRA			●	●	●	●				●						236
SMT 636 SUPRA			●	●	●	●					●	●				236
SMT 644 SUPRA		●	●	●						●						236
SMT 644 SUPRA		●	●	●							●	●				236
SMT 645 SUPRA		●	●	●						●						237
SMT 924 SPECIAL		●	●								●	●				238
SMT 925 SPECIAL		●	●	●						●						238
SMT 925 SPECIAL		●	●	●							●	●				238
SMT 926 SPECIAL		●	●	●							●	●				239
SMT 996 SPECIAL			●	●						●						240
SMT 996 SPECIAL			●	●							●	●				240

● = main application ○ = possible application

Abrasive mop discs

Applications guide

1. Red bar

Label indicates the max. peripheral speed of 80 m/s

2. Safety recommendations

oSa label

3. Dimensions

Product dimensions in mm and inches

4. Punch ring

Manufacturer information, no expiry date

5. Grit size

6. Cat. number

7. Safety recommendations

Language neutral pictograms

8. Product group

Extra/Supra/Special

9. Product name

Type



Product groups

Klingspor offers three integrated product groups. For each user and application we offer the right abrasive mop disc. All abrasive mop discs are manufactured according to the applicable standards and guarantee the highest degree of safety.



EXTRA

Ideal price-performance ratio for universal implementation. Excellent grinding results on different steel materials.



SUPRA

Professional products with excellent service life and high stock removal rate. Aggressive grinding and long service life.



SPECIAL

High performance products for special industrial and trade applications. High performance and service life even when used intensively.

Product structure

The three abrasive mop disc components are perfectly integrated to achieve maximum performance.

1. Grinding flaps


Klingspor has developed special coated abrasives for its abrasive mop discs. The grinding tool is perfect for use with high speed angle grinders (80 m/s) and corresponding applications. This ensures top grinding performance and long service life.

2. Backing plate

Klingspor uses two different backing plate types to produce abrasive mop discs. The first one is the most popular on the market made of glass fibre; the second one is made of plastic.


3. Glue

The glue (adhesive) is the joint between the backing plate and the grinding flaps. It ensures that the grinding flaps cannot come off the backing plate if used properly. It also ensures safety far above the guidelines of the oSa directives and the EN 13743 safety standard.

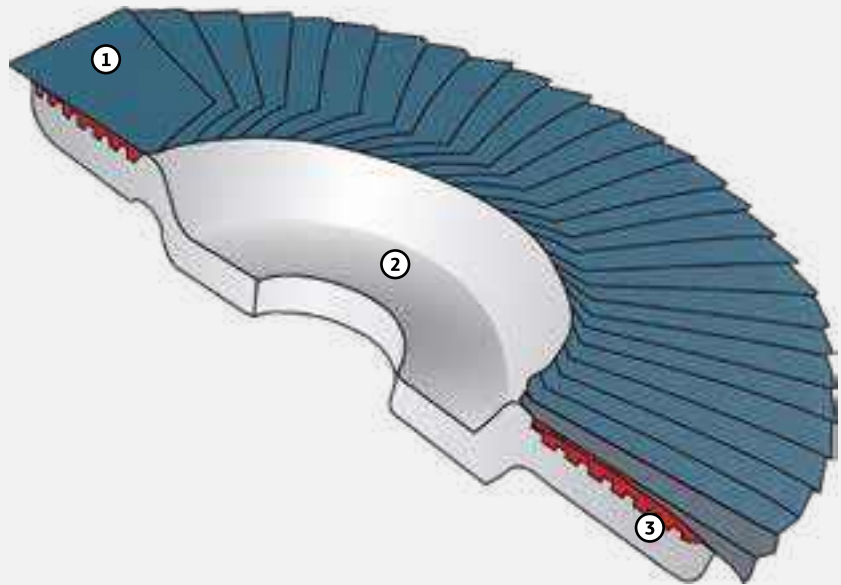


Form

The convex abrasive mop disc grinds a narrower surface than the flat abrasive mop disc. The more selective use of the convex disc achieves a greater stock removal rate per time unit as compared to the flat mop disc. The convex abrasive mop disc is particularly suited to working on edges and welded seams. The flat disc is primarily used for flat and surface grinding.

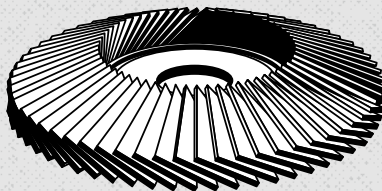

convex

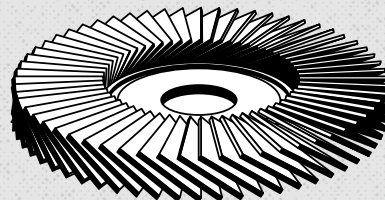

flat




Abrasive mop discs

Applications guide

Coated abrasives

Compared to belt applications the coated abrasives for abrasive mop discs withstand much higher loads. On the one hand, the cutting speed of abrasive mop discs is approximately 2 to 2.5 times faster than the cutting rate of a belt application, on the other hand the backing must wear down to ensure that new, unused grit is used. Klingspor has developed special coated abrasives specifically for this product group. These are developed specifically for high powered angle grinders (80 m/s) and ensures a top grinding performance and long service life (see diagram).

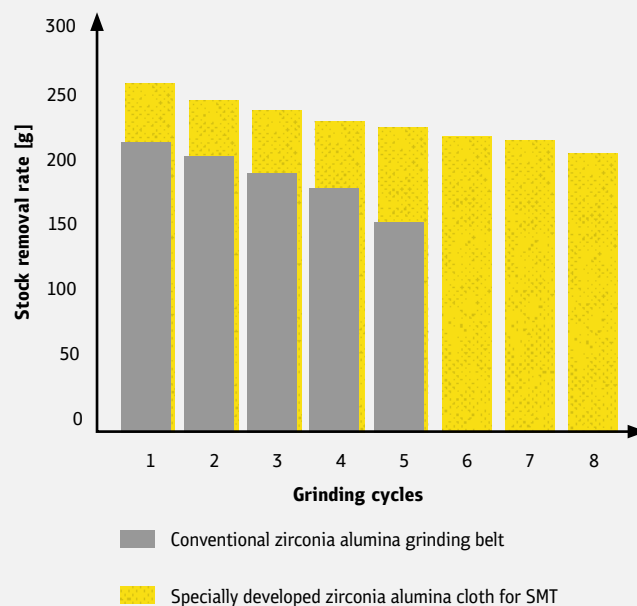

1. Zirconia alumina cloth

Zirconia alumina grit, heavy cotton polyester cloth, best performance with high power machines

2. Zirconia alumina cloth

Aggressive zirconia alumina grit, cotton cloth, good stock removal with angle grinders of all performance classes

3. Zirconia alumina + Multibond

Self-sharpening zirconia alumina grit, cotton backing, especially for cool grinding on stainless steel

4. Aluminium oxide cloth

Durable grit aluminium oxide, cotton cloth, for use with metal and NF-metals

5. Ceramic aluminium oxide + Multibond

Ceramic high performance grit, robust polyester backing high performance for stainless steel work, cool grinding on stainless steel surfaces

6. Ceramic aluminium oxide

Ceramic high performance grit, robust polyester backing, high performance for steel work



The safe use of Klingspor abrasives

Klingspor abrasive mop discs are manufactured according to the oSa and EN13743 standards, this ensures the highest level of user safety.



Wear safety goggles or glasses to protect the eyes



Wear safety gloves to protect hands



Wear a dust mask



Observe safety instructions



Use ear protectors



Do not use for wet grinding



Correctly mounted








Incorrectly mounted

Abrasive mop discs

SMT programme



		Steel / NF metals	Steel / INOX		Service life		Stainless Steel
		Aggression	Aggression				Aggression
SPECIAL	Type:		SMT 924		SMT 925	SMT 926	SMT 996
							
	Aggression:		■■■■■■■		■■■■■■■	■■■■■■■□	■■■■■■■
	Service life:		■■■■■■■		■■■■■■■□	■■■■■■■	■■■■■■■□
	Backing plate:		Glass fibre		Plastic	Glass fibre	Glass fibre
	Form:		convex (6°)		convex (12°) / flat	convex (6°)	convex (6°) / flat
SUPRA	Type:		SMT 644				
							
	Aggression:		■■■■■■■□				
	Service life:		■■■■■■■□				
	Backing plate:		Glass fibre				
	Form:		convex (12°) / flat				
	Type:		SMT 624	SMT 628		SMT 626	SMT 636
							
	Aggression:		■■■■■■■□	■■■■■■■□		■■■■■■■□	■■■■■■■□
	Service life:		■■■■■■■□□	■■■■■■■□□		■■■■■■■□	■■■■■■■□□
	Backing plate:		Glass fibre	Glass fibre		Glass fibre	Glass fibre
	Form:		convex (12°)	flat		convex (6°)	convex (6°) / flat
EXTRA	Type:	SMT 314	SMT 324		SMT 325		
							
	Aggression:	■■■■■□□□	■■■■■□□□		■■■■■□□□		
	Service life:	■■■■■□□□	■■■■■□□□		■■■■■□□□		
	Backing plate:	Glass fibre	Glass fibre		Plastic		
	Form:	convex (12°)	convex (12°) / flat		convex (12°) / flat		

Abrasive mop discs

Abrasive mop disc

SMT 314

EXTRA



Class	EXTRA
Aggression	■■■■■□□□
Service life	■■■■■□□□

Applications:	
Steel	●
NF metals	●
Wood	○



Properties	
Grain	Aluminium oxide
Backing plate	Glass fibre
Design	Convex 12°

Advantages: Good stock removal rate on unalloyed steels - Also suitable for non-ferrous metals - Good removal rate on angle grinders of all performance classes

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		36	80 m/s	13300 rpm	10	322808
115 x 22,23		40	80 m/s	13300 rpm	10	322809
115 x 22,23		60	80 m/s	13300 rpm	10	322811
115 x 22,23		80	80 m/s	13300 rpm	10	322812
115 x 22,23		120	80 m/s	13300 rpm	10	322813
125 x 22,23		36	80 m/s	12200 rpm	10	322814
125 x 22,23		40	80 m/s	12200 rpm	10	322815
125 x 22,23		60	80 m/s	12200 rpm	10	322817
125 x 22,23		80	80 m/s	12200 rpm	10	322818
125 x 22,23		120	80 m/s	12200 rpm	10	322819
180 x 22,23		40	80 m/s	8500 rpm	10	322821
180 x 22,23		60	80 m/s	8500 rpm	10	322822
180 x 22,23		80	80 m/s	8500 rpm	10	322823

Abrasive mop disc

SMT 324 EXTRA



Class	EXTRA
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ □ □ □

Applications:	
Stainless steel	●
Steel	●















Properties	
Grain	Zirconia alumina
Backing plate	Glass fibre
Design	Convex 12°, flat

Advantages: Universal product for edges and surface work on steel and stainless steel - Good removal rate on angle grinders of all performance classes - No glazing, also under low grinding pressure

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		40	80 m/s	13300 rpm	10	321509
115 x 22,23		60	80 m/s	13300 rpm	10	321511
115 x 22,23		80	80 m/s	13300 rpm	10	321513
115 x 22,23		40	80 m/s	13300 rpm	10	321645
115 x 22,23		60	80 m/s	13300 rpm	10	321647
115 x 22,23		80	80 m/s	13300 rpm	10	321649
125 x 22,23		40	80 m/s	12200 rpm	10	321510
125 x 22,23		60	80 m/s	12200 rpm	10	321512
125 x 22,23		80	80 m/s	12200 rpm	10	321514
125 x 22,23		40	80 m/s	12200 rpm	10	321646
125 x 22,23		60	80 m/s	12200 rpm	10	321648
125 x 22,23		80	80 m/s	12200 rpm	10	321650

Abrasive mop discs

Abrasive mop disc

SMT 325
EXTRA



Class	EXTRA
Aggression	■■■■■□□
Service life	■■■■■□□



Applications:	
Stainless steel	●
Steel	●

XLOCK



Properties	
Grain	Zirconia alumina
Backing plate	Plastic, glass-fibre reinforced
Design	Convex 12°, flat

Advantages: Universal product for edges and surface work on steel and stainless steel - Good removal rate on angle grinders of all performance classes - No glazing, also under low grinding pressure

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		40	80 m/s	13300 rpm	10	321659
115 x 22,23		60	80 m/s	13300 rpm	10	321661
115 x 22,23		80	80 m/s	13300 rpm	10	321663
115 x 22,23		40	80 m/s	13300 rpm	10	321653
115 x 22,23		60	80 m/s	13300 rpm	10	321655
115 x 22,23		80	80 m/s	13300 rpm	10	321657
115 x 22,23 X-LOCK		40	80 m/s	13300 rpm	10	351281
115 x 22,23 X-LOCK		60	80 m/s	13300 rpm	10	351280
115 x 22,23 X-LOCK		80	80 m/s	13300 rpm	10	351279
125 x 22,23		40	80 m/s	12200 rpm	10	321660
125 x 22,23		60	80 m/s	12200 rpm	10	321662
125 x 22,23		80	80 m/s	12200 rpm	10	321664
125 x 22,23		40	80 m/s	12200 rpm	10	321654
125 x 22,23		60	80 m/s	12200 rpm	10	321656
125 x 22,23		80	80 m/s	12200 rpm	10	321658
125 x 22,23 X-LOCK		40	80 m/s	12200 rpm	10	351278
125 x 22,23 X-LOCK		60	80 m/s	12200 rpm	10	351277
125 x 22,23 X-LOCK		80	80 m/s	12200 rpm	10	351276

Abrasive mop disc

SMT 624 SUPRA



Class	SUPRA
Aggression	■ ■ ■ ■ ■ ■ □
Service life	■ ■ ■ ■ ■ □ □

Applications:	
Stainless steel	●
Steel	●




























Properties	
Grain	Zirconia alumina
Backing plate	Glass fibre
Design	Convex 12°

Advantages: Aggressive stock removal rate and comfortable grinding behaviour - For universal use in demanding grinding work on steel and stainless steel - Optimal removal rate when used on high power angle grinders

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 16		36	80 m/s	15300 rpm	10	322758
100 x 16		40	80 m/s	15300 rpm	10	322759
100 x 16		60	80 m/s	15300 rpm	10	322760
100 x 16		80	80 m/s	15300 rpm	10	322761
100 x 16		120	80 m/s	15300 rpm	10	322762
115 x 22,23		36	80 m/s	13300 rpm	10	322764
115 x 22,23		40	80 m/s	13300 rpm	10	322765
115 x 22,23		50	80 m/s	13300 rpm	10	322766
115 x 22,23		60	80 m/s	13300 rpm	10	322767
115 x 22,23		80	80 m/s	13300 rpm	10	322768
115 x 22,23		120	80 m/s	13300 rpm	10	322769
125 x 22,23		36	80 m/s	12200 rpm	10	322771
125 x 22,23		40	80 m/s	12200 rpm	10	322772
125 x 22,23		50	80 m/s	12200 rpm	10	322773
125 x 22,23		60	80 m/s	12200 rpm	10	322774
125 x 22,23		80	80 m/s	12200 rpm	10	322775
125 x 22,23		120	80 m/s	12200 rpm	10	322776
150 x 22,23		40	80 m/s	10200 rpm	10	322778
150 x 22,23		60	80 m/s	10200 rpm	10	322779
150 x 22,23		80	80 m/s	10200 rpm	10	322780
180 x 22,23		36	80 m/s	8500 rpm	10	322782
180 x 22,23		40	80 m/s	8500 rpm	10	322783
180 x 22,23		60	80 m/s	8500 rpm	10	322785
180 x 22,23		80	80 m/s	8500 rpm	10	322786
180 x 22,23		120	80 m/s	8500 rpm	10	322787

Abrasive mop discs

Abrasive mop disc

SMT 628 SUPRA



Class	SUPRA
Aggression	■■■■■□
Service life	■■■■■□□

Applications:	
Stainless steel	●
Steel	●



Properties	
Grain	Zirconia alumina
Backing plate	Glass fibre
Design	Flat

Advantages: Especially suitable for surface grinding of steel and stainless steel - Optimal removal rate when used on high power angle grinders - Aggressive stock removal rate and comfortable grinding behaviour

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23	■	36	80 m/s	13300 rpm	10	322789
115 x 22,23	■	40	80 m/s	13300 rpm	10	322790
115 x 22,23	■	60	80 m/s	13300 rpm	10	322792
115 x 22,23	■	80	80 m/s	13300 rpm	10	322793
115 x 22,23	■	120	80 m/s	13300 rpm	10	322794
125 x 22,23	■	36	80 m/s	12200 rpm	10	322795
125 x 22,23	■	40	80 m/s	12200 rpm	10	322796
125 x 22,23	■	60	80 m/s	12200 rpm	10	322798
125 x 22,23	■	80	80 m/s	12200 rpm	10	322799
125 x 22,23	■	120	80 m/s	12200 rpm	10	322800
180 x 22,23	■	36	80 m/s	8500 rpm	10	322802
180 x 22,23	■	40	80 m/s	8500 rpm	10	322803
180 x 22,23	■	60	80 m/s	8500 rpm	10	322805
180 x 22,23	■	80	80 m/s	8500 rpm	10	322806

Abrasive mop disc

SMT 626 SUPRA



Class	SUPRA
Aggression	■■■■■□
Service life	■■■■■□

Applications:	
Stainless steel	●
Steel	●



















Properties	
Grain	Zirconia alumina
Backing plate	Glass fibre
Design	Convex 6°

Advantages: High material removal rates - Considerably longer service life due to unique flap angle

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		36	80 m/s	13300 rpm	10	321686
115 x 22,23		40	80 m/s	13300 rpm	10	321689
115 x 22,23		50	80 m/s	13300 rpm	10	321692
115 x 22,23		60	80 m/s	13300 rpm	10	321694
115 x 22,23		80	80 m/s	13300 rpm	10	321697
115 x 22,23		120	80 m/s	13300 rpm	10	321683
125 x 22,23		36	80 m/s	12200 rpm	10	321687
125 x 22,23		40	80 m/s	12200 rpm	10	321690
125 x 22,23		50	80 m/s	12200 rpm	10	321693
125 x 22,23		60	80 m/s	12200 rpm	10	321695
125 x 22,23		80	80 m/s	12200 rpm	10	321698
125 x 22,23		120	80 m/s	12200 rpm	10	321684
180 x 22,23		36	80 m/s	8500 rpm	10	321688
180 x 22,23		40	80 m/s	8500 rpm	10	321691
180 x 22,23		60	80 m/s	8500 rpm	10	321696
180 x 22,23		80	80 m/s	8500 rpm	10	321699

Abrasive mop discs

Abrasive mop disc, multibond

SMT 636 SUPRA



Class	SUPRA
Aggression	■■■■■□
Service life	■■■■■□








Applications:	Stainless steel ●
----------------------	-------------------



Properties	
Grain	Zirconia alumina multibond
Backing plate	Glass fibre
Design	Convex 6°, flat

Advantages: Special product for use on stainless steel - Cool grinding due to multibond - Suitable for use on edges and surfaces - No glazing or clogging

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
Diameter x Bore in mm						Form		Grit		Max. operating speed				Max. RPM			Packing unit/pcs.		Cat. number					
115 x 22,23								40		80 m/s				13300 rpm			10		322826					
115 x 22,23								60		80 m/s				13300 rpm			10		322827					
115 x 22,23								80		80 m/s				13300 rpm			10		322828					
125 x 22,23								40		80 m/s				12200 rpm			10		322831					
125 x 22,23								60		80 m/s				12200 rpm			10		322832					
125 x 22,23								80		80 m/s				12200 rpm			10		322833					
180 x 22,23								40		80 m/s				8500 rpm			10		322836					

Abrasive mop disc

SMT 644 SUPRA



Class	SUPRA
Aggression	■■■■■□
Service life	■■■■■□







Applications:	Steel ●
	Stainless steel ●



Properties	
Grain	Zirconia alumina
Backing plate	Glass fibre
Design	Convex 12°, flat








Advantages: Long service life when used on extremely steep edges - Constant stock removal level even when used on surfaces - No glazing or clogging, even at low machine output or low grinding pressure (<1000W)

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
Diameter x Bore in mm					Form		Grit		Max. operating speed		Max. RPM		Packing unit/pcs.		Cat. number									
115 x 22,23							40		80 m/s		13300 rpm		10		329993									
115 x 22,23							60		80 m/s		13300 rpm		10		329994									
115 x 22,23							80		80 m/s		13300 rpm		10		329995									
115 x 22,23							40		80 m/s		13300 rpm		10		329989									
115 x 22,23							60		80 m/s		13300 rpm		10		329990									
115 x 22,23							80		80 m/s		13300 rpm		10		329991									



► Continuation of SMT 644, Abrasive mop disc

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
125 x 22,23		40	80 m/s	12200 rpm	10	330005
125 x 22,23		60	80 m/s	12200 rpm	10	330006
125 x 22,23		80	80 m/s	12200 rpm	10	330007
125 x 22,23		120	80 m/s	12200 rpm	10	330008
125 x 22,23		40	80 m/s	12200 rpm	10	329997
125 x 22,23		60	80 m/s	12200 rpm	10	330002
125 x 22,23		80	80 m/s	12200 rpm	10	330003

Abrasive mop disc

SMT 645 SUPRA



Class	SUPRA
Aggression	■■■■■□
Service life	■■■■■

Applications:	
Stainless steel	●
Steel	●






Properties	
Grain	Zirconia alumina
Backing plate	Plastic, glass-fibre reinforced
Design	Flat

Advantages: High edge stability - Very good removal rate also on low power angle grinders - Long service life due to double grinding flaps

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		40	80 m/s	13300 rpm	10	278590
115 x 22,23		60	80 m/s	13300 rpm	10	278591
115 x 22,23		80	80 m/s	13300 rpm	10	278592

Abrasive mop discs

Abrasive mop disc

SMT 924 SPECIAL



Class	SPECIAL
Aggression	■■■■■■■■
Service life	■■■■■■■■







Applications:	
Stainless steel	●
Steel	●



Properties	
Grain	Ceramic Al. oxide
Backing plate	Glass fibre
Design	Convex 6°

Advantages: Highly aggressive abrasive performance for demanding work on edges - High edge stability - Optimal removal rate when used on high power angle grinders under increased grinding pressure

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
Diameter x Bore in mm					Form		Grit		Max. operating speed			Max. RPM			Packing unit/pcs.			Cat. number						
115 x 22,23							40		80 m/s			13300 rpm			10			322862						
115 x 22,23							60		80 m/s			13300 rpm			10			322863						
115 x 22,23							80		80 m/s			13300 rpm			10			322864						
125 x 22,23							40		80 m/s			12200 rpm			10			322867						
125 x 22,23							60		80 m/s			12200 rpm			10			322868						
125 x 22,23							80		80 m/s			12200 rpm			10			322869						

Abrasive mop disc

SMT 925 SPECIAL



Class	SPECIAL
Aggression	■■■■■■■■
Service life	■■■■■■■□








Applications:	
Stainless steel	●
Steel	●



Properties	
Grain	Zirconia alumina
Backing plate	Plastic, glass-fibre reinforced
Design	Convex 12°, flat










Advantages: Significantly higher abrasive performance and service life - Optimal removal rate when used on high-power angle grinders under increased grinding pressure - High removal rate and long service life

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
Diameter x Bore in mm						Form		Grit		Max. operating speed		Max. RPM		Packing unit/pcs.		Cat. number								
115 x 22,23								40		80 m/s		13300 rpm		10		321714								
115 x 22,23								60		80 m/s		13300 rpm		10		321715								
115 x 22,23								36		80 m/s		13300 rpm		10		321668								
115 x 22,23								40		80 m/s		13300 rpm		10		321670								
115 x 22,23								60		80 m/s		13300 rpm		10		321674								
115 x 22,23								80		80 m/s		13300 rpm		10		321677								
125 x 22,23								40		80 m/s		12200 rpm		10		321719								



►► Continuation of SMT 925, Abrasive mop disc

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
125 x 22,23		60	80 m/s	12200 rpm	10	321720
125 x 22,23		80	80 m/s	12200 rpm	10	321721
125 x 22,23		40	80 m/s	12200 rpm	10	321671
125 x 22,23		60	80 m/s	12200 rpm	10	321675
125 x 22,23		80	80 m/s	12200 rpm	10	321678
180 x 22,23		24	80 m/s	8500 rpm	5	321667
180 x 22,23		36	80 m/s	8500 rpm	5	321669
180 x 22,23		40	80 m/s	8500 rpm	5	321672
180 x 22,23		60	80 m/s	8500 rpm	5	321676

Abrasive mop disc

SMT 926 SPECIAL



Class	<i>SPECIAL</i>
Aggression	■■■■■□
Service life	■■■■■

Applications:	
Stainless steel	●
Steel	●










Properties	
Grain	Zirconia alumina
Backing plate	Glass fibre
Design	Convex 6°

Advantages: Maximum removal rate and service life - Especially suitable for rough work on steel and stainless steel - Optimal removal rate when used on high power angle grinders under increased grinding pressure

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		40	80 m/s	13300 rpm	10	321703
115 x 22,23		60	80 m/s	13300 rpm	10	321706
115 x 22,23		80	80 m/s	13300 rpm	10	321708
125 x 22,23		40	80 m/s	12200 rpm	10	321704
125 x 22,23		60	80 m/s	12200 rpm	10	321707
125 x 22,23		80	80 m/s	12200 rpm	10	321709
180 x 22,23		40	80 m/s	8500 rpm	10	321705

Abrasive mop discs

Abrasive mop disc, multibond

SMT 996

SPECIAL



Class	SPECIAL
Aggression	■■■■■■■■■
Service life	■■■■■■■□

Applications:
Stainless steel ●



Properties	
Grain	Ceramic aluminium oxide multibond
Backing plate	Glass fibre
Design	Convex 6°, flat

Advantages: Aggressive abrasive performance with little expenditure of energy - High edge stability - Cool grinding due to multibond - Optimal removal rate when used on high power angle grinders under increased grinding pressure

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Bore in mm	Form	Grit	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 22,23		40	80 m/s	13300 rpm	10	322849
115 x 22,23		60	80 m/s	13300 rpm	10	322850
115 x 22,23		80	80 m/s	13300 rpm	10	322851
125 x 22,23		40	80 m/s	12200 rpm	10	322852
125 x 22,23		60	80 m/s	12200 rpm	10	322853
125 x 22,23		80	80 m/s	12200 rpm	10	322854



A large grid of small squares, likely a template for notes or a drawing area.





Kronenflex® cutting-off wheels and grinding discs

About the product

As the inventor of the high speed cutting-off wheel, it is only natural that we strive to continually develop and improve our Kronenflex® products.

Kronenflex® cutting-off wheels and grinding discs feature an optimal combination of bonding agent and grain type for high aggressiveness, outstanding service life and consistently high quality. They comply with the highest safety standards, including the oSa regulations and the European safety standard EN 12413.

As a result of continuous innovations and the development of special products for diverse requirements, our Kronenflex® products offer the optimal solution for all standard materials and applications.

Typical materials for these products

- ▶ Steel
- ▶ Stainless steel
- ▶ Construction steel
- ▶ NF metals
- ▶ Cast materials
- ▶ Stone
- ▶ Plastics
- ▶ Mineral materials
- ▶ Pipes
- ▶ Flat irons
- ▶ Tins
- ▶ Solid materials

Typical applications for these products

- ▶ Bodywork
- ▶ Maintenance and repair work
- ▶ Locksmiths
- ▶ Steelwork
- ▶ Plant construction
- ▶ Container construction
- ▶ Upkeep
- ▶ Metal works
- ▶ Vehicle construction
- ▶ Foundries
- ▶ Shipyards

Kronenflex® cutting-off wheels

Kronenflex® cutting-off wheels	Page
0,8–1,2 mm	252
Small cutting-off wheels	259
1,6–1,9 mm	260
2,0–3,2 mm	264
Large cutting-off wheels	272

Kronenflex® grinding discs

Kronenflex® grinding discs	Page
Grinding discs	282

Kronenflex® cutting-off wheels and grinding discs

Application guides

1. EAN code (EAN 13)
2. Safety pictograms
3. Max. operating speed
4. Klingspor cat. number
5. Specification of design, grade and bond according to EN 12413
6. Dimensions in mm and inches
7. Applications (see colour coding system)



8. Information about the manufacturer
9. Operating restrictions
10. Safety standard (oSa / EN 12413)
11. Max. RPM
12. Safety pictograms
13. Product group / type
14. Klingspor brand Kronenflex®

Performance classes

Kronenflex® cutting-off wheels and grinding discs come in three performance classes with six colour codes for a quick overview of the most important material applications.



EXTRA

Products for universal application, offering a particularly attractive price-performance ratio.



SUPRA

Optimised products for different applications. Excellent service life and cutting performance.



SPECIAL

High performance products for special applications. Highest service life and cutting performance in the respective material application area.

Kronenflex® cutting-off wheels and grinding discs

Application guides



1. Label and cover sheet

The label includes all of the important information on the product, manufacturer and information on the proper use of the grinding tool

2. Mixture

The grit: Today all grit types are only produced synthetically. Only grit produced synthetically can ensure continuously high wear and cutting disc quality.

Resins and fillers: Additional, important components for cutting and grinding discs are resins, (in liquid and dry form), and fillers. These components are key in determining the disc properties, such as stability, stock removal rate, sheer strength and can be adjusted to meet the needs of the specific application.



3. Metal ring

Provides information on the expiry date of the disc.

4. Glass fibre

Glass fibre is a reinforcing layer to ensure stability and increases the safety of the cutting-off wheel. The number and strength of the glass fibre layers is dependent upon the disc type and application. The higher the potential lateral load on a cutting-off wheel (it is greater during free cutting than during stationary cutting), the more glass fibre that the cutting disc must contain, or the contained glass fibre must be more stable. Particularly thin material is used for thin cutting discs, (0.8 mm to 1.0 mm), to ensure that a large grit ratio is achieved between the layers. Grinding discs are constructed with at least 3 glass fibre layers.

Klingspor cutting-off wheel and grinding disc colour coding system


Metal universal

Grey



Stainless steel

Blue




Steel

Black



Aluminium

Silver



Castings

Red



Stone/ concrete

Green



Pictograms on the product pages



One glass fibre cloth



Two glass fibre cloths



Free of iron, sulphur and chloride



Packaged in units of 25 pcs each in the Kronenflex® tub for consistently high performance and protection from moisture

Kronenflex® cutting-off wheels and grinding discs

Application guides



Quarter	
V 01	January-March
V 04	April-June
V 07	July-September
V 10	October-December

Safety and storage

The shelf life of cutting-off wheels and grinding discs is primarily determined by their moisture content. Cutting-off wheels and grinding discs that are subjected to increased humidity after they were manufactured lose their original service life. Correct storage ensures a consistent long service life. Cutting-off wheels and grinding discs that are subjected to water or steam are a safety risk. The user is obligated to use the product correctly. Cutting-off wheels and grinding discs should not be used past the expiry date.

Working safely

By being careful and recognising risks

Please avoid the risks listed below when working with cutting-off wheels and grinding discs.

- ▶ contact with rotating abrasive discs
- ▶ abrasive disc breakage
- ▶ grinding dust and debris
- ▶ vibration
- ▶ noise

Through personal protective gear

Goggles, gloves, ear muffs and dust masks must be worn. When working on hard grinding applications additional protective gear is required, such as face protection, leather aprons and safety boots.

With protective machine guards

Machine guards are supplied with the grinding machine and may not be changed or removed. When using cup grinding wheels the outer surface must be completely enclosed.

In addition, cup grinding wheels may only be used in combination with an adjustable wheel guard, to balance the wear on the disc and to keep the exposure of the disc at a minimum.

Through visual inspection and performance of checks prior to mounting

Ensure the disc RPM matches the machine RPM setting and avoid exceeding the maximum admissible operating speed. Carefully check the cutting-off wheel and grinding disc for damage. If the cutting-off wheel or grinding disc is damaged, do not use the damaged product. Our cutting-off wheels and grinding discs are marked with the corresponding safety pictograms.

Through correct use

Ensure that the respective disc is being used correctly. Avoid damage to the mounting bore or to the disc through jerks, excessive force, or falls. Ensure that the disc is correctly and securely mounted and use the correct mounting flange. Prior to starting work, the abrasive disc should run at operating speed for at least 30 seconds. Please observe the FEPA safety regulations and the European Standard 12413.

The peripheral speed and grinding pressure are important parameters for achieving optimal cutting-off and grinding disc results.

The optimal speed

Too low

If the RPM of the machine is too low, the cutting-off wheel and grinding disc tend to “jump”, and the disc edges wear down unevenly. Particularly with thin material cross sections, such as cutting tin or wire, this causes the grit to be separated from the bond and the disc wear speed is above average.

Optimal

Klingspor cutting-off wheels and grinding discs are high performance products and were developed such that best disc performance (measured by the stock removal volume to disc wear ratio) is achieved in the range right below the maximum peripheral speed. Keep the machine running at a consistently high RPM and, if needed, select a more powerful machine.

Too high

The maximum RPM and peripheral speed is printed on the label of each disc. For your own safety, please be sure not to exceed the recommended speeds when grinding.

The correct grinding pressure

An important requirement for a satisfactory cutting result is the correct grinding pressure. A common mistake is to reduce the grinding pressure to preserve the disc and extend the cutting life of the wheel. If this is done, the material overheats (turns blue); the cutting-off wheel becomes clogged and “burns up”. This is why the grinding pressure should always be set such that the cutting time is as short as possible. This is particularly true for heat sensitive material with large material cross sections.

The proper hardness

Cutting-off wheels

Generally, the rule of thumb when selecting the correct cutting-off wheel is the harder the material, the softer the abrasive bond. The reason being the service life of a cutting-off wheel is dependent on whether the cutting surface of the workpiece hardens or not. Overheating results in the disc “glazing” and the cutting properties are negatively affected. In this case, the hardness of the bond should be decreased and a softer cutting-off wheel should be used.

Grinding discs



The rule of thumb also applies to grinding discs; the harder the material, the softer the grinding disc bond. In addition, the application plays a decisive role. Corner grinding and the grinding of burrs and sharp edges can cause grit to be removed from the bond. We suggest the selection of a hard bond. On the other hand, when working on surfaces or small weld seams a disc that is too hard would become dull and would no longer be effective. It would have a good service life, but would also have a low stock removal rate and high work costs. A medium or soft disc bond would be best for finish grinding.

Kronenflex® cutting-off wheels and grinding discs

Application guides



Correct application/techniques for cutting-off

Pressure may only be placed on the cutting-off wheel from a radial direction. This is the only way to avoid wobbling, buckling and disc breakage, especially when applying a high level of cutting pressure. The workpiece that is to be cut-off should be properly affixed to the workbench to ensure that the disc does not slide off to the side. In addition, we recommend that the material is affixed as close to the cutting site as possible to ensure that it does not vibrate, flutter or slip to the side.

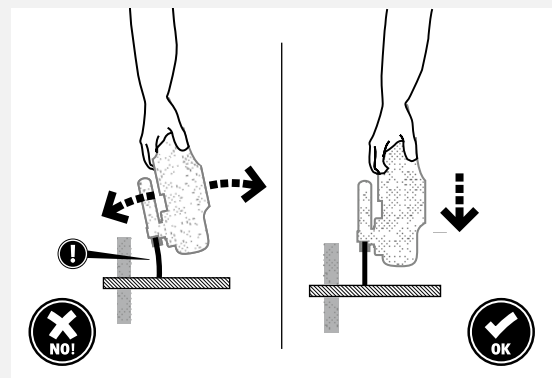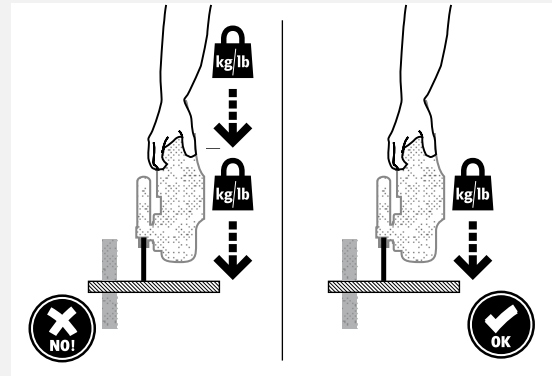

Correct application/techniques for grinding

Grinding discs work best at 35 degree angle to the workpiece. This angle provides the best stock removal to disc wear ratio. If possible, always select this angle. When grinding and the angle is below 15° a very thin edge which levels off is formed around the circumference of the disc. Even minimal changes to the angle can result in a situation in which the grinding pressure can no longer be absorbed resulting in the grinding disc slipping to the side. Valuable grit is not used and an imbalance is created that results in having to replace the disc prematurely.

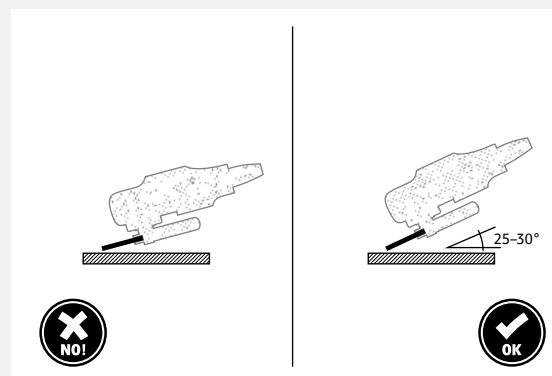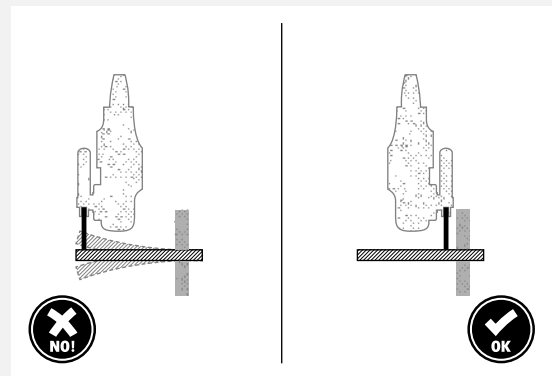

The correct mount


For better power transmission

Cutting-off wheels and grinding discs are mounted to the machine with side flanges. The flange elements are responsible for transferring power to the disc. For reasons of safety it is extremely important that defective or incorrect flanges are not used.

For more safety


The use of wheel flange FL 76 provides increased lateral stability and user control, specifically when using thin cutting-off wheels with a flat form and diameter of 180 mm and 230 mm.

The applicable regulations and standards must be complied with when using the wheel flange. The contact surface and diameter of the wheel flange must match. Using wheel flanges with diameters that do not match is prohibited.

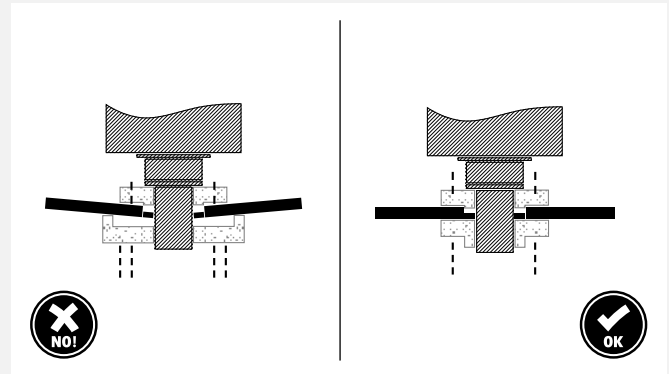


Depressed centre grinding discs

4 - 10 mm thickness

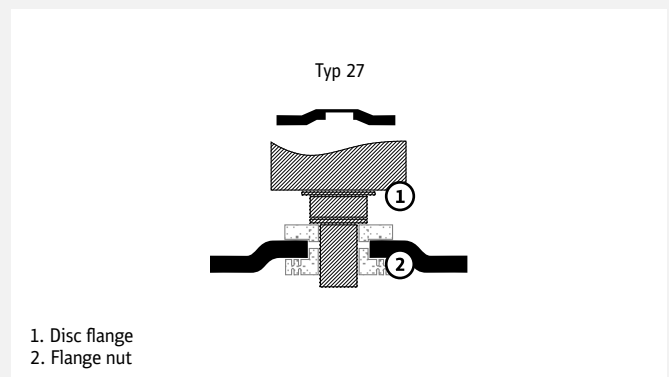

Flat and depressed centre cutting-off wheels

0.8 - 4 mm thickness

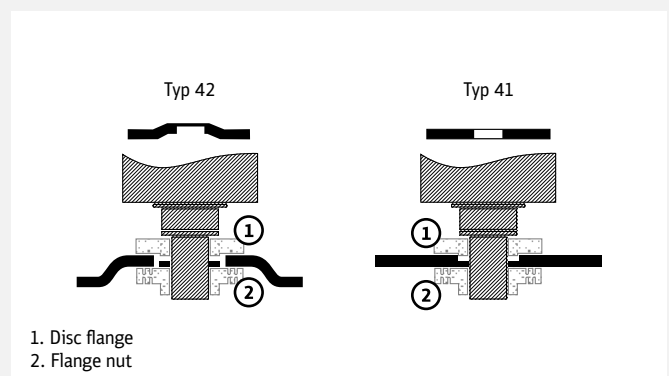

Kronenflex® cutting-off wheels and grinding discs

Application guides

Recognise and avoid errors

	Issue	Possible cause	Solution
Cutting-off wheels	Cutting surface is blue	Cutting time is too long	Increase feed speed or grinding pressure
		Drive power is too low	Use a more powerful machine
		Disc is too hard	Select a softer bond
		Material cross section is too great for the disc diameter	Work with a saw cut / work with a smaller material diameter
		Cutting disc is too wide for the material/application	Use a thinner cutting disc
	Disc wear is too high	White cutting surface: disc hardness is too low	Select a harder bond
		Peripheral speed is too low	Increase peripheral speed
		RPM decrease is too great	Reduce grinding pressure or use a more powerful machine
	Crooked cut	Workpiece is not mounted properly	Mount the material closer to the cutting site
		Grinding pressure is too great	Reduce grinding pressure
		Disc width is too thin for the material/application	Increase disc width
		Disc is completely worn down	Replace disc
	Disc breakage	Machine is operated incorrectly	Avoid lateral pressure on the disc
		Incorrect wheel flange diameter	Use wheel flange with identical diameters
		Cutting-off wheel is used for grinding	Cutting-off wheels may not be used for grinding
		Material is not properly affixed	Mount the material closer to the cutting site
	Disc periphery is frayed	Disc periphery is burned	Select a softer bond, decrease grinding pressure
		Material is not properly affixed	Mount the material closer to the cutting site
	Disc jumps	Wheel flange is dirty or worn out	Clean wheel flange or replace wheel flange
		Bearing is defective	Replace machine or replace bearing
		Bore dimension and mount do not match	Use proper bore dimension or use a reducer ring
	Bore hole is broken	Wheel flanges are of different sizes	Use wheel flanges that have the same diameters
		Machine is operated incorrectly	Reduce lateral pressure on the disc
		Cutting-off wheel is used for grinding	Cutting-off wheels may not be used for grinding
	Issue	Possible cause	Solution
Grinding discs	Removal rate is too low	Shiny contact surface: bond is too hard	Select a softer bond
		Grinding pressure is too low	Increase grinding pressure
		Machine performance is too low	Use a more powerful machine
	Disc is loaded/clogged	Bond is too hard	Select a softer bond
		Loading/clogging with NF metals	Use softer bond or select a special cutting-off wheel for NF metals
		Grinding pressure is too low	Increase grinding pressure
	Wear is too high	Grinding pressure is too high	Reduce grinding pressure
		Bond is too soft	Select a harder bond
		Machine RPM decreases too quickly	Reduce grinding pressure
		Machine performance is too low	Use a more powerful machine
	Periphery is not rounded / breakage on the edge	Disc angle is too flat	Increase disc angle (at least 25°)
		Grinding pressure is too high	Reduce grinding pressure
	Disc wobbles	The mount is not centred	Check bore diameter and mounting diameter and adjust accordingly
		Mounting shaft is worn	Replace machine
		Mounting flange is worn / dirty / incorrect	Replace / clean mounting flange / check dimensions
		Disc wobbles	Use a new disc

What the type designation reveals about the design of cutting-off wheels and grinding discs

The type designation given on a cutting-off wheel or grinding disc divulges more than just the name of the product. It provides important information on the performance class and on the composition of the tool. The first letter indicates which abrasive grit is used. If this letter is followed by a three digit number, the first digit signifies the performance class (the performance class is also included below the name of the product). The last two digits point to the size of the grit that was used. The letters at the end of the type designation mark the hardness grade of a cutting-off wheel or grinding disc.

Grit type	Performance class	Grit size according to FEPA standard	Hardness	Performance class
A Aluminium oxide	3 /// EXTRA	16	M soft	/// EXTRA
C Silicon carbide	6 /// SUPRA	24	N	/// SUPRA
Z Zirconia alumina	9 /// SPECIAL	30	R	/// SPECIAL
		36	S	
		46	T hard	
		60		
		80		

Explained by example of the Z 960 TX cutting-off wheel

Grit type	Performance class	Grit size according to FEPA standard	Hardness	Performance class
Z Zirconia alumina	9 /// SPECIAL	60	TX hard	/// SPECIAL

The safe use of Klingspor abrasives

Klingspor Kronenflex cutting-off wheels and grinding discs are manufactured in accordance with the oSa and EN 12413 standards, this ensures the highest level of user safety.



Wear safety goggles or glasses to protect the eyes



Wear dust mask



Use ear protectors



Not permitted for grinding



Wear safety gloves to protect hands



Observe safety instructions



Do not use for wet grinding



Do not use if damaged

Kronenflex® cutting-off wheels

0,8 – 1,2 mm

About the product

Klingspor Kronenflex® cutting-off wheels with a disc thickness of 0,8 to 1,2 mm are very thin cutting-off wheels with very short cutting times and minimal burr formation.

These cutting-off wheels develop their full power when working on thin-walled materials and are known for their precise, accurate and fast cuts at lowest thermal loads. Due to the cutting-off wheels' excellent cutting properties the weight of the machine itself provides suitable grinding pressure.

Klingspor Kronenflex® cutting-off wheels of the 0,8 to 1,2 mm class are known for their high level of safety, efficiency and productivity.

Typical materials for these products

- ▶ Steel
- ▶ Stainless steel
- ▶ Cast materials
- ▶ Construction steel
- ▶ NF metals
- ▶ Thin-walled profiles
- ▶ Thin tins
- ▶ Thin pipes
- ▶ Corrugated sheeting
- ▶ Flat irons
- ▶ Cable ducts
- ▶ Steel cables

Typical applications for these products

- ▶ Bodywork
- ▶ Maintenance and repair work
- ▶ Locksmiths
- ▶ Steelwork
- ▶ Plant construction
- ▶ Container construction
- ▶ Upkeep
- ▶ Metal works
- ▶ Vehicle construction

Material applications

Type	Thickness [mm]	Steel	Hardened steel	Tool steel	Stainless steel	High alloy steel	Corrosion and acid proof steels	Aluminium	Bronze	Copper	Brass	Zinc die-casting	Cast iron	Page
A 980 TZ SPECIAL	0,8	●	●	●	●	●	●	●	○	○	○	○	○	253
A 60 EXTRA	1,0	●	○	○	●	○	○	○	○	○	○	○	○	253
A 660 R SUPRA	1,0	●	●	●	●	○	○	○	○	○	○	○	○	255
A 60 TZ SPECIAL INOX	1,0	●	●	●	●	●	●	○	○	○	○	●	○	256
A 960 TZ SPECIAL	1,0	●	●	●	●	●	●	○	○	○	○	●	○	257
A 60 N SUPRA	1,0	○	○	○	○	○	○	●	●	●	●	○	○	255
K 960 TX SPECIAL	1,0	●	●	●	●	●	●	○	○	○	○	●	●	257
Z 960 TX SPECIAL	1,0	●	●	●	●	●	●	○	○	○	○	●	○	258
EDGE SPECIAL	1,2	●	●	●	●	●	●	●	○	○	○	●	○	258
A 660 R SUPRA Small cutting-off wheel	1,0–1,6	●	●	●	○	○	○	○	○	○	○	○	○	259

● = main application ○ = possible applications

Kronenflex® Tub

Due to climatic influences in the first weeks after production, cutting discs usually lose significant performance. In order for you to be able to appreciate all benefits of our newly developed product, it comes in the airtight Kronenflex® tub.

In comparison with carton packaging the discs stay fresh much longer and gain up to 40% more performance.



Kronenflex® cutting-off wheels 0,8 - 1,2 mm for hand held machines



Cutting-off wheel INOX

A 980 TZ SPECIAL



Class	SPECIAL
Bond	■ ■ ■ ■ ■ ■ ■ □
Aggression	■ ■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ ■ □ □



Applications:	
Stainless steel	●
Steel	●
NF metals	●

Advantages: Free of iron, sulfur and chlorine - Very short cutting times - Very precise and clean cuts - Low thermal load - Minimal burr formation, minimizing finish-machining - 25 pieces delivered in the Kronenflex® box for long-lasting high performance and moisture protection

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 0,8 x 22,23		80 m/s	13300 rpm	25	322182
125 x 0,8 x 22,23		80 m/s	12200 rpm	25	322183

Cutting-off wheel

A 60 EXTRA



Class	EXTRA
Bond	■ ■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ ■ □ □ □ □
Service life	■ ■ ■ ■ □ □ □ □

Applications:	
Stainless steel	●
Metals	●

Advantages: Minimal burr formation - Low thermal load - Very good price-performance ratio

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1 x 22,23		80 m/s	13300 rpm	25	262936
125 x 1 x 22,23		80 m/s	12200 rpm	25	262937

Kronenflex® cutting-off wheels 0,8 - 1,2 mm

for hand held machines

Cutting-off wheel

A 60
EXTRA



Class	EXTRA
Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ ■ □ □

Applications:	
Stainless steel	●
Metals	●

Advantages: Minimal burr formation - Low thermal load - Very good price-performance ratio - 10 pieces in a tin with viewing window

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/tin	Cat. number
115 x 1 x 22,23	—	80 m/s	13300 rpm	10 discs	310499
125 x 1 x 22,23	—	80 m/s	12200 rpm	10 discs	310500

Minimum order quantity = 5 tins

Cutting-off wheel

A 60
EXTRA



Class	EXTRA
Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ ■ □ □

Applications:	
Stainless steel	●
Metals	●

Advantages: Minimal burr formation - Low thermal load - Very good price-performance ratio - 5 tins in a sales display

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/display	Cat. number
125 x 1 x 22,23	—	80 m/s	12200 rpm	5 tins with 10 discs	312031

Kronenflex® cutting-off wheels 0,8 - 1,2 mm for hand held machines



Cutting-off wheel

A 60 N SUPRA



Class	SUPRA										Applications:
Bond	■	■	■	■	■	■	■	■	■	■	Aluminium ●
Aggression	■	■	■	■	■	■	■	■	■	■	Steel ○
Service life	■	■	■	■	■	■	■	■	■	■	

Advantages: Special combination prevents smearing and clogging - Minimal burr formation

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1 x 22,23		80 m/s	13300 rpm	25	264297
125 x 1 x 22,23		80 m/s	12200 rpm	25	264298

Cutting-off wheel INOX

A 660 R SUPRA



Class	SUPRA										Applications:
Bond	■	■	■	■	■	■	■	■	■	■	Stainless steel ●
Aggression	■	■	■	■	■	■	■	■	■	■	Steel ●
Service life	■	■	■	■	■	■	■	■	■	■	

Advantages: Minimal burr formation - Low thermal load - Highest cutting performance

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1 x 22,23		80 m/s	13300 rpm	25	328905
125 x 1 x 22,23		80 m/s	12200 rpm	25	328906

Kronenflex® cutting-off wheels 0,8 - 1,2 mm

for hand held machines

Cutting-off wheel

A 60 TZ SPECIAL



Class	SPECIAL
Bond	■■■■■■■□
Aggression	■■■■■■■□
Service life	■■■■■■■□



Applications:	
Stainless steel	●
Steel	●
NF metals	○



Advantages: Free of iron, sulfur and chlorine - Short cutting times - Minimal burr formation - Low thermal load

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 1 x 16	—	80 m/s	15300 rpm	25	202402
115 x 1 x 22,23	—	80 m/s	13300 rpm	25	202400
115 x 1 x 22,23	—	80 m/s	13300 rpm	25	233741
115 x 1 x 22,23 X-LOCK	—	80 m/s	13300 rpm	25	351259
125 x 1 x 22,23	—	80 m/s	12200 rpm	25	202401
125 x 1 x 22,23	—	80 m/s	12200 rpm	25	233742
125 x 1 x 22,23 X-LOCK	—	80 m/s	12200 rpm	25	351258

Cutting-off wheel

A 60 TZ SPECIAL



Class	SPECIAL
Bond	■■■■■■■□
Aggression	■■■■■■■□
Service life	■■■■■■■□



Applications:	
Stainless steel	●
Steel	●
NF metals	○

Advantages: Free of iron, sulphur and chlorine - Fast cutting - Minimal burr formation - Low thermal load - 10 pieces in a tin with viewing window

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/tin	Cat. number
115 x 1 x 22,23	—	80 m/s	13300 rpm	10 discs	310503
125 x 1 x 22,23	—	80 m/s	12200 rpm	10 discs	310504

Minimum order quantity = 5 tins

Kronenflex® cutting-off wheels 0,8 - 1,2 mm for hand held machines



Cutting-off wheel INOX

A 960 TZ SPECIAL



Class	SPECIAL
Bond	■■■■■■■■■
Aggression	■■■■■■■■■
Service life	■■■■■■■■■



Applications:	
Stainless steel	●
Steel	●

Advantages: Free of iron, sulphur and chlorine - Short cutting times and long service life - Low thermal load - Low burr formation - Optimized bonding for considerably longer service life - For diverse applications - 25 pieces delivered in the Kronenflex® box for long lasting high performance and moisture protection


Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1 x 22,23	—	80 m/s	13300 rpm	25	322180
125 x 1 x 22,23	—	80 m/s	12200 rpm	25	322181

Ceramic cutting-off wheel

K 960 TX SPECIAL



Class	SPECIAL
Bond	■■■■■■■■■
Aggression	■■■■■■■■■
Service life	■■■■■■■■■



Applications:	
Steel	●
Stainless steel	●
High alloy steel	●
Carbon steel	●
Titanium	●

Advantages: Free of iron, sulfur and chlorine - Outstanding performance in daily use - Highest cutting performance, even with low grinding pressure - 25 pieces delivered in the Kronenflex® box for long lasting high performance and moisture protection

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1 x 22,23	—	80 m/s	13300 rpm	25	328885
125 x 1 x 22,23	—	80 m/s	12200 rpm	25	328886

CERAMIC !



Kronenflex® cutting-off wheels 0,8 - 1,2 mm


for hand held machines

Cutting-off wheel INOX

Z 960 TX SPECIAL



Class	SPECIAL
Bond	■■■■■■■■
Aggression	■■■■■■■■
Service life	■■■■■■■■



Applications:	
Stainless steel	●
Alloys	●
Carbon steel	●
Titanium	●

ZIRCONIUM



Advantages: Free of iron, sulphur and chlorine - Ideal for tough/hard materials such as titanium and high alloy steels - Short cutting times and long service life due to self-sharpening zirconia alumina - Low thermal load - Low burr formation - 25 pieces delivered in the Kronenflex® box for long lasting high performance and moisture protection


Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1 x 22,23	■■■■■■■■	80 m/s	13300 rpm	25	322184
125 x 1 x 22,23	■■■■■■■■	80 m/s	12200 rpm	25	322185

Cutting-off wheel

EDGE SPECIAL



Class	
Bond	■■■■■■■■
Aggression	■■■■■■■■
Service life	■■■■■■■■



Applications:	
Stainless steel	●
Steel	●
Aluminium	●

NEW



Advantages: High-performance cutting-off wheel with self-sharpening abrasive grain - Great cutting performance combined with a long service life - Wide range of applications - Packaged in units of 25 in the Kronenflex Box® to preserve maximum performance and protect against moisture

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1,2 x 22,23	■■■■■■■■	80 m/s	13300 rpm	25	355380
125 x 1,2 x 22,23	■■■■■■■■	80 m/s	12200 rpm	25	355379


Kronenflex® small cutting-off wheels

for hand held machines



Small cutting-off wheel

A 660 R SUPRA



Class SUPRA

Applications:

Bond	■ ■ ■ ■ ■ ■ ■ ■
Aggression	■ ■ ■ ■ ■ ■ ■ ■
Service life	■ ■ ■ ■ ■ ■ ■ ■

Steel	●
Stainless steel	●

Advantages: Minimal burr formation - For universal use in hard-to-reach areas - For cutting tins, profiles and solid materials

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
50 x 1 x 6	—	100 m/s	38200 rpm	100	329096
50 x 1 x 10	—	100 m/s	38200 rpm	100	329097
76 x 1 x 6	—	100 m/s	25200 rpm	100	329098
76 x 1 x 10	—	100 m/s	25200 rpm	100	329099
76 x 1,6 x 6	—	100 m/s	25200 rpm	100	329100
76 x 1,6 x 10	—	100 m/s	25200 rpm	100	329101
100 x 1 x 6	—	100 m/s	19000 rpm	25	329102
100 x 1 x 10	—	100 m/s	19000 rpm	25	329103

Fixing spindle

SD 660



Advantages: Fixing spindle for clamping on the small A 660 R cutting blades onto straight grinders, flexible shafts, and drilling machines - Fits 6 and 10 mm holes

Diameter in mm	Suitable for	Packing unit/pcs.	Cat. number
6	6 and 10 mm bore	1	337156

Kronenflex® cutting-off wheels

1,6 – 1,9 mm

About the product

Klingspor Kronenflex® cutting-off wheels with a disc thickness of 1,6 to 1,9 mm combine excellent cutting properties with a high degree of lateral stability.

These wheels provide convincing arguments especially in day-to-day applications when working on materials with medium-strength cross sections. They are known for their short cutting time, good stability and minimal burr formation.

These advantages in connection with the wide range of applications make Klingspor Kronenflex cutting wheels of the 1,6 to 1,9 mm class the highest performing universal wheel for daily use in metalworking.

Typical materials for these products

- ▶ Steel
- ▶ Stainless steel
- ▶ Construction steel
- ▶ NF metals
- ▶ Cast materials
- ▶ Pipes
- ▶ Flat iron
- ▶ Tins
- ▶ Solid materials

Typical applications for these products

- ▶ Locksmiths
- ▶ Shipyards
- ▶ Steelwork
- ▶ Plant construction
- ▶ Metal works
- ▶ Vehicle construction

Type	Thickness [mm]	Material applications												Page
		Steel	Hardened steel	Tool steel	Stainless steel	High alloy steels	Corrosion and acid proof steels	Aluminium	Bronze	Copper	Brass	Die-cast aluminium	Zinc die-casting	
A 346 EXTRA	1,6	●	○	○	●	○	●	○	○	○	○	○	○	261
A 646 R SUPRA	1,6–1,9	●	●	○	○	●	●							261
A 46 TZ SPECIAL INOX	1,6–1,9	●	●	●	●	●	●	○	○	○	○		●	262
A 946 TZ SPECIAL	1,6–1,9	●	●	●	●	●	●	●	○	○	○	○	○	263

● = main application ○ = possible applications

Kronenflex® cutting-off wheels 1,6 - 1,9 mm

for hand held machines



Cutting-off wheel

A 346 EXTRA



Class EXTRA

Applications:

Bond	■ ■ ■ ■ ■ □ □	Stainless steel	●
Aggression	■ ■ ■ ■ ■ □ □	Steel	●
Service life	■ ■ ■ ■ ■ □ □	Aluminium	○

Advantages: Free of iron, sulphur and chlorine - Universal use on steel and stainless steel (INOX) - Cutting disc made of a calcined, cubic aluminium oxide that is self-sharpening - Minimal burr formation and longer service life - Best suited for cutting thin-walled profiles and pipes

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1,6 x 22,23	—	80 m/s	13300 rpm	25	340936
125 x 1,6 x 22,23	—	80 m/s	12200 rpm	25	340938

Cutting-off wheel

A 646 R SUPRA



Class SUPRA

Applications:

Bond	■ ■ ■ ■ ■ ■ □	Steel	●
Aggression	■ ■ ■ ■ ■ ■ □	Stainless steel	○
Service life	■ ■ ■ ■ ■ □		

Advantages: Free of iron, sulphur and chlorine - Universal use on steel and stainless steel - Cutting disc made of self-sharpening, calcined aluminum oxide - Tremendous aggressiveness when used for cutting solid steel materials

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1,6 x 22,23	—	80 m/s	13300 rpm	25	340947
125 x 1,6 x 22,23	—	80 m/s	12200 rpm	25	340946
150 x 1,6 x 22,23	—	80 m/s	10200 rpm	25	340945
180 x 1,6 x 22,23	—	80 m/s	8500 rpm	25	340944
230 x 1,9 x 22,23	—	80 m/s	6600 rpm	25	340943
230 x 1,9 x 22,23	—	80 m/s	6600 rpm	25	340942

Kronenflex® cutting-off wheels 1,6 - 1,9 mm

for hand held machines

Cutting-off wheel INOX

A 46 TZ
SPECIAL



Class	SPECIAL
Bond	■■■■■■■□
Aggression	■■■■■■■□
Service life	■■■■■■■□

Applications:	
Stainless steel	●
Steel	●

Advantages: Free of iron, sulphur and chlorine - Universal use on steel and stainless steel - First choice for professional applications and fast cutting of demanding materials

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 1,6 x 16	—	80 m/s	15300 rpm	25	194071
115 x 1,6 x 22,23	—	80 m/s	13300 rpm	25	187170
115 x 1,6 x 22,23	—	80 m/s	13300 rpm	25	235378
115 x 1,6 x 22,23 X-LOCK	—	80 m/s	13300 rpm	25	351257
125 x 1,6 x 22,23	—	80 m/s	12200 rpm	25	187171
125 x 1,6 x 22,23	—	80 m/s	12200 rpm	25	235379
125 x 1,6 x 22,23 X-LOCK	—	80 m/s	12200 rpm	25	351256
150 x 1,6 x 22,23	—	80 m/s	10200 rpm	25	241472
180 x 1,6 x 22,23	—	80 m/s	8500 rpm	25	221161
180 x 1,6 x 22,23	—	80 m/s	8500 rpm	25	312257
230 x 1,9 x 22,23	—	80 m/s	6600 rpm	25	224084
230 x 1,9 x 22,23	—	80 m/s	6600 rpm	25	265044

Kronenflex® cutting-off wheels 1,6 - 1,9 mm for hand held machines



Cutting-off wheel

A 946 TZ SPECIAL



Class	SPECIAL
Bond	■ ■ ■ ■ ■ ■ ■ ■
Aggression	■ ■ ■ ■ ■ ■ ■ ■
Service life	■ ■ ■ ■ ■ ■ □



Applications:	
Steel	●
Stainless steel	●
NF metals	○
Castings	○

Advantages: Free of iron, sulfur and chlorine - Extra long service life across all applications - For universal use in metal processing - Short cutting times - Low burr formation - Low thermal load - 25 pieces delivered in the Kronenflex® box for long lasting high performance and moisture protection

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 1,6 x 22,23	—	80 m/s	13300 rpm	25	339109
125 x 1,6 x 22,23	—	80 m/s	12200 rpm	25	339110
150 x 1,6 x 22,23	—	80 m/s	10200 rpm	25	339111
180 x 1,6 x 22,23	—	80 m/s	8500 rpm	25	339112
230 x 1,9 x 22,23	—	80 m/s	6600 rpm	25	339113
230 x 1,9 x 22,23	—	80 m/s	6600 rpm	25	339114

Wheel flange

FL 76



Advantages: Use of the wheel flange increases lateral stability with thin cutting-off wheels having a flat form and diameters of 180 and 230 mm

Diameter in mm	Suitable for	Packing unit/pcs.	Cat. number
76	A 46 TZ + A 646 R + A 946 TZ	1 set	236130

Kronenflex® cutting-off wheels

2,0 – 3,2 mm

About the product

Klingspor Kronenflex® cutting-off wheels with a disc thickness of 2,0 to 3,2 mm are known for their particularly high lateral stability.

This is important for applications which require deep cuts into solid material – e.g. to cut risers/casts or large profiles. The enormous lateral forces that occur while working require high cutting-off wheel stability.

Despite their thickness, Klingspor Kronenflex cutting-off wheels of the 2,0 to 3,2 mm class are known for their excellent cutting rate and long service life. These cutting-off wheels are ideal for applications that require a high degree of lateral stability.

Typical materials for these products

- ▶ Steel
- ▶ Stainless steel
- ▶ Construction steel
- ▶ NF metals
- ▶ Cast materials
- ▶ Stone
- ▶ Plastics
- ▶ Mineral materials
- ▶ Solid materials
- ▶ Pipes
- ▶ Flat irons
- ▶ Tins

Typical applications for these products

- ▶ Foundries
- ▶ Locksmiths
- ▶ Shipyards
- ▶ Steelwork
- ▶ Plant construction
- ▶ Metal works
- ▶ Maintenance and repair work

Material applications														
Type	Thickness [mm]	Steel	Hardened steels	Tool steel	Stainless steel	High alloy steels	Corrosion and acid proof steels	Aluminium	Bronze	Copper	Brass	Zinc die-casting	Cast iron	Stone / concrete
A 24 EXTRA	2,0–3,2	●	○	●	○	○	○	○	○	○	○	○	○	
A 24 R SUPRA	2,5–3,0	●	●	●	○	○	○					○	○	
A 24 N SUPRA INOX	2,5–3,0	○	●	○	●	●	●	○	○	○	○			
A 36 R SUPRA INOX	2,0–2,5	○	○	●	●	●	●		○	○	○			
A 36 TZ SPECIAL INOX	2,0	○	○	●	●	●	●						○	
A 24 R/36 SPECIAL INOX	2,5–3,0	○	○	●	●	●	●							
A 24 TZ SPECIAL	2,5–3,0	○		○	●	●	●						○	
A 46 N SUPRA	2,5–3,0							●	●	●	●	○		
C 24 EXTRA	2,5–3,0													●
C 24 R SUPRA	2,5–3,0												○	●

● = main application ○ = possible applications

Kronenflex® cutting-off wheels 2,0 - 3,2 mm for hand held machines



Cutting-off wheel

A 24 EXTRA



Class	EXTRA
Bond	■ ■ ■ ■ □ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □

Applications:	
Metals	●

XLOCK !

Advantages: Proven a million times over - Standard wheel with outstanding price-performance ratio - For universal use in metalworking - Fast cutting off of solid material

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 2,5 x 16*		80 m/s	15300 rpm	25	188998
115 x 2,5 x 22,23*		80 m/s	13300 rpm	25	242137
115 x 2,5 x 22,23*		80 m/s	13300 rpm	25	188461
115 x 2,5 x 22,23 X-LOCK*		80 m/s	13300 rpm	25	351255
115 x 3,2 x 22,23		80 m/s	13300 rpm	25	209014
125 x 2,5 x 22,23*		80 m/s	12200 rpm	25	242138
125 x 2,5 x 22,23*		80 m/s	12200 rpm	25	188463
125 x 2,5 x 22,23 X-LOCK*		80 m/s	12200 rpm	25	351254
125 x 3,2 x 22,23		80 m/s	12200 rpm	25	209016
150 x 2,5 x 22,23		80 m/s	10200 rpm	25	235375
150 x 2,5 x 22,23		80 m/s	10200 rpm	25	235374
180 x 2 x 22,23		80 m/s	8500 rpm	25	286455
180 x 3 x 22,23		80 m/s	8500 rpm	25	13490
180 x 3 x 22,23		80 m/s	8500 rpm	25	189000
230 x 2 x 22,23		80 m/s	6600 rpm	25	286456
230 x 3 x 22,23		80 m/s	6600 rpm	25	13492
230 x 3 x 22,23		80 m/s	6600 rpm	25	189002

* New recipe

Kronenflex® cutting-off wheels 2,0 - 3,2 mm

for hand held machines

Cutting-off wheel

A 24 R

SUPRA



Class	SUPRA		Applications:
Bond	■ ■ ■ ■ ■ □ □		Steel ●
Aggression	■ ■ ■ ■ □ □ □		Stainless steel ○
Service life	■ ■ ■ ■ □ □ □		Castings ○

Advantages: Optimized combination for use on steel - Can be used on stainless steel - Good cutting properties

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 2,5 x 16*		80 m/s	15300 rpm	25	13754
115 x 2,5 x 22,23*		80 m/s	13300 rpm	25	13297
115 x 2,5 x 22,23*		80 m/s	13300 rpm	25	13466
125 x 2,5 x 22,23*		80 m/s	12200 rpm	25	13295
125 x 2,5 x 22,23*		80 m/s	12200 rpm	25	13738
150 x 2,5 x 22,23		80 m/s	10200 rpm	25	6667
180 x 3 x 22,23		80 m/s	8500 rpm	25	13456
180 x 3 x 22,23		80 m/s	8500 rpm	25	13470
230 x 3 x 22,23		80 m/s	6600 rpm	25	13464
230 x 3 x 22,23		80 m/s	6600 rpm	25	13478

* New recipe

Cutting-off wheel INOX

A 24 N

SUPRA



Class	SUPRA		Applications:
Bond	■ ■ ■ □ □ □ □		Stainless steel ●
Aggression	■ ■ ■ ■ □ □ □		Aluminium ○
Service life	■ ■ ■ ■ □ □ □		

Advantages: Special recipe prevents smearing and clogging - High removal rate on stainless steel due to hardened aluminium oxide

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 2,5 x 22,23		80 m/s	13300 rpm	25	3020
125 x 2,5 x 22,23		80 m/s	12200 rpm	25	2951
150 x 2,5 x 22,23		80 m/s	10200 rpm	25	235377
180 x 3 x 22,23		80 m/s	8500 rpm	25	13455
180 x 3 x 22,23		80 m/s	8500 rpm	25	13469
230 x 3 x 22,23		80 m/s	6600 rpm	25	13463
230 x 3 x 22,23		80 m/s	6600 rpm	25	13477

Kronenflex® cutting-off wheels 2,0 - 3,2 mm for hand held machines



Cutting-off wheel INOX

A 36 R SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ ■ ■ ■ □
Service life	■ ■ ■ ■ ■ □ □

Applications:	
Stainless steel	●

Advantages: Excellent cutting performance - Optimized aggression and service life

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 2 x 22,23	—	80 m/s	13300 rpm	25	123208
125 x 2 x 22,23	—	80 m/s	12200 rpm	25	126849
150 x 2 x 22,23	—	80 m/s	10200 rpm	25	251752
180 x 2,5 x 22,23	—	80 m/s	8500 rpm	25	123209
230 x 2,5 x 22,23	—	80 m/s	6600 rpm	25	123833

Cutting-off wheel INOX

A 36 TZ SPECIAL



Class	SPECIAL
Bond	■ ■ ■ ■ ■ ■ □
Aggression	■ ■ ■ ■ ■ ■ ■
Service life	■ ■ ■ ■ ■ □ □

Applications:	
Stainless steel	●
Steel	①

Advantages: Very good cutting performance, even with low grinding pressure

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 2 x 22,23	—	80 m/s	13300 rpm	25	136549
125 x 2 x 22,23	—	80 m/s	12200 rpm	25	136550
180 x 2 x 22,23	—	80 m/s	8500 rpm	25	136551
230 x 2 x 22,23	—	80 m/s	6600 rpm	25	136552

Kronenflex® cutting-off wheels 2,0 - 3,2 mm

for hand held machines

Cutting-off wheel INOX

A 24 TZ SPECIAL



Class	SPECIAL
Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ ■ □ □

Applications:	
Stainless steel	●
Steel	○
Castings	○

Advantages: Optimized combination for use on stainless steel - Excellent performance

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 2,5 x 22,23		80 m/s	13300 rpm	25	136554
125 x 2,5 x 22,23		80 m/s	12200 rpm	25	136555
180 x 3 x 22,23		80 m/s	8500 rpm	25	136558
230 x 3 x 22,23		80 m/s	6600 rpm	25	136559

Cutting-off wheel INOX

A 24 R/36 SPECIAL



Class	SPECIAL
Bond	■ ■ ■ ■ □ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □

Applications:	
Stainless steel	●

Advantages: Special wheel for the nuclear industry - Free of iron, sulphur and chlorine

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 2,5 x 22,23		80 m/s	13300 rpm	25	60534
125 x 2,5 x 22,23		80 m/s	12200 rpm	25	2825
180 x 3 x 22,23		80 m/s	8500 rpm	25	60537
230 x 3 x 22,23		80 m/s	6600 rpm	25	60061

Kronenflex® cutting-off wheels 2,0 - 3,2 mm

for hand held machines



Cutting-off wheel

A 46 N SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ □ □ □ □
Aggression	■ ■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ ■ □ □ □

Applications:
Aluminium ●

Advantages: Special combination prevents smearing and clogging - Optimized cutting off performance on non-ferrous metals

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 2,5 x 22,23		80 m/s	13300 rpm	25	170707
125 x 2,5 x 22,23		80 m/s	12200 rpm	25	170708
180 x 3 x 22,23		80 m/s	8500 rpm	25	170709
230 x 3 x 22,23		80 m/s	6600 rpm	25	170710

Cutting-off wheel

C 24 EXTRA



Class	EXTRA
Bond	■ ■ ■ ■ □ □ □ □
Aggression	■ ■ ■ ■ □ □ □ □
Service life	■ ■ ■ ■ □ □ □ □

Applications:
Stone/Concrete ●

Advantages: Universal cutting-off wheel for all mineral materials - Wide application range due to sharp, coarse SiC grit

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 2,5 x 16		80 m/s	15300 rpm	25	188999
115 x 2,5 x 22,23		80 m/s	13300 rpm	25	242143
115 x 2,5 x 22,23		80 m/s	13300 rpm	25	188462
125 x 2,5 x 22,23		80 m/s	12200 rpm	25	242144
125 x 2,5 x 22,23		80 m/s	12200 rpm	25	188464
180 x 3 x 22,23		80 m/s	8500 rpm	25	13489
180 x 3 x 22,23		80 m/s	8500 rpm	25	189001
230 x 3 x 22,23		80 m/s	6600 rpm	25	13491
230 x 3 x 22,23		80 m/s	6600 rpm	25	189003

Kronenflex® cutting-off wheels 2,0 - 3,2 mm

for hand held machines

Cutting-off wheel

C 24 R
SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ □ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □

Applications:	
Stone/Concrete	●
Castings	○

Advantages: Optimal for all mineral materials due to sharp, coarse SiC grit

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 2,5 x 22,23		80 m/s	13300 rpm	25	13465
125 x 2,5 x 22,23		80 m/s	12200 rpm	25	13739
230 x 3 x 22,23		80 m/s	6600 rpm	25	13461
230 x 3 x 22,23		80 m/s	6600 rpm	25	13475

Notes



Cutting-off wheels

Kronenflex® large cutting-off wheels

About the product

Klingspor Kronenflex large cutting-off wheels are high performance, robust wheels for special uses with an outer diameter of 300 mm and more.

Their high lateral stability ensures safe operation also in connection with hard cutting applications. The optimised grits and resins are specifically created for the specific application areas. The cutting-off wheels are known for their fast cuts and low thermal material loads, as well as their long service life.

Klingspor Kronenflex large cutting-off wheels uses range from bench cutting to handheld machines, from railway construction to industrial uses on stationary machines. These products are the ideal solution if outstanding performance and a high degree of safety is what is needed.

		Machines				Material applications														
Type	Thick- ness [mm]	Handheld machines 80m/s	Handheld machines 100m/s	Bench chop saws	Stationary < 5KW	Steel	Hardened steels	Tool steel	Stainless steel	High alloy steels	Corrosion and acid proof steels	Aluminium	Bronze	Copper	Brass	Zinc die-casting	Cast iron	Stone / concrete	Asphalt	Page
A 24 EXTRA	3,5	●				●	○	●	○	○	○						○			275
C 24 EXTRA	3,5	●															○	●	○	275
A 624 SX SPECIAL	3,5–4,0		●			●	●													276
A 924 R SPECIAL	3,5–4,0		●			●	●	●	●	●	●						○			276
A 924 SX SPECIAL	3,5–4,0		●			●	●													277
A 330 EXTRA	2,5			●		●	○	○	○	○	○									279
A 630 N SUPRA	2,5			●		●	○	○	○	○	○									279
A 930 N SPECIAL	2,5–3,5			●		●	○	○	○	○	○									280
A 24 R SUPRA	3,0–4,5				●	●	●	●	○	○	○						○			278
A 24 N SUPRA INOX	3,5				●	○	●	●	●	●	●	○	○	○	○	○				278

● = main application ○ = possible applications

Cutting-off wheels for different types of machines

- ▶ Handheld machines 80m/s
- ▶ Handheld machines with a clamping device for vignole rails 100m/s
- ▶ Transportable bench chop saws < 3KW
- ▶ Stationary saws / cutters up to 5KW
- ▶ Stationary saws / cutters > 5KW

Stationary cutting-off wheels may not be used with freehand machines.

Products for handheld machines

These products were developed for use with handheld machines (petrol, electric, high frequency).

Please note that it is very important that the maximum operating speed setting on the machines and the maximum operating speed setting on the products match. 80 m/s and 100 m/s machines are available on the market. Klingspor large cutting-off wheels for handheld machines are certified for 80 m/s handheld machines. Products for railway construction with a clamping device are certified up to 100 m/s.

Products for transportable bench chop saws

Cutting-off wheels for this product group are suitable for low power bench chop saws. These products may not be used with large stationary and / or handheld machines.

They are known for their high cutting rate, which ensures fast and cool cutting.

Products for stationary saws / cutters

Stationary machines are best suited for economical and safe cutting of large cross sections and heavy workpieces.

Products in this segment with their outstanding performance and long service life fulfil the most demanding requirements of stationary cutting. Good aggressiveness ensures low thermal loads when working on large cross sections.

Kronenflex® large cutting-off wheels

Applications guide

Which cutting-off wheel is used with which machine?

Large cutting-off wheels for stationary machines and large cutting-off wheels for handheld machines are designed differently and their build is optimised for the respective machine type. For safety reasons large cutting-off wheels for stationary machines may never be used with handheld machines.

The bore diameter of a large cutting-off wheel does not indicate if it is a wheel that can be used with a stationary machine or if it is a wheel that can be used with a handheld machine.

A binding overview regarding which Klingspor wheel type is to be used with which machine type is provided in the table below.

Type	Ø [mm]	Thick- ness [mm]	Bore Ø [mm]	Machines	Safety		
					Max. operating speed	Application type (EN12413)	
A 24 EXTRA	300	3,5	20/22,23	general handheld machines (petrol, electric, high frequency)	80 m/s	freehand cutting	
C 24 EXTRA	300	3,5	20/22,23				
A 330 EXTRA	350	2,5	25,4	transportable bench chop saws, chop saws	80 m/s	stationary guided cutting <3 KW	
	300	2,5	25,4				
A 630 N SUPRA	350	2,5	25,4				
	400	3,2	25,4				
A 930 N SPECIAL	300	2,5	25,4				
	350	3,0	25,4				
A 24 R SUPRA	250	3	32	stationary saws / cutters	100 m/s	stationary guided cutting >3 KW	
	300	3	22,23/25,4/30/32				
	350	3,5	25,4/32				
	400	4,5	25,4/32/40				
A 24 N SUPRA	350	3,5	25,4	stationary saws / cutters	100 m/s	stationary guided cutting >5 KW	
A 24 R/06 SUPRA	400	4	25,4				
A 924 R SPECIAL	300	3,5	20/22,23/25,4	general handheld machines, joint cutters (petrol, electric, high frequency)	100 m/s	freehand cutting	
	350	4	20/22,23/25,4				
A 624 SX SUPRA	300	3,5	22,23	Handheld grinders (petrol, electric, high frequency, hydraulic) in combination with a clamping device	100 m/s	stationary guided cutting	
	350	4	22,23/25,4				
	400	4	25,4				
A 924 SX SPECIAL	300	3,5	22,23				
	350	4	22,23/25,4				
	400	4	22,23/25,4				

Kronenflex® large cutting-off wheels

for petrol driven saw / cutter



Cutting-off wheel

A 24 EXTRA



Class	EXTRA
Bond	■ ■ ■ ■ □ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □

Applications:
Metals ●

Advantages: Standard wheel with outstanding price-performance ratio - For universal use in metalworking - For use on gas powered freehand machines with a cutting speed of 80 m/s

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
300 x 3,5 x 20	—	80 m/s	5100 rpm	10	288221
300 x 3,5 x 22,23	—	80 m/s	5100 rpm	10	288222

Cutting-off wheel

C 24 EXTRA



Class	EXTRA
Bond	■ ■ ■ ■ □ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □

Applications:
Stone/Concrete ●

Advantages: Optimal for all mineral materials due to sharp, coarse SiC grit - For use on gas powered freehand machines with a cutting speed of 80 m/s

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
300 x 3,5 x 20	—	80 m/s	5100 rpm	10	288223
300 x 3,5 x 22,23	—	80 m/s	5100 rpm	10	288224

Kronenflex® large cutting-off wheels

for petrol driven saw / cutter with clamping device

Cutting-off wheel

A 924 R SPECIAL



Class	SPECIAL
Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ ■ ■ ■ □
Service life	■ ■ ■ ■ ■ ■ ■

Applications:	
Steel	●
Stainless steel	○

Advantages: Optimised bond for use on steel, also can be used on stainless steel - For use on gas powered free-hand machines with a cutting speed of 100m/s - Free-hand cutting of pipes, rods, profiles and solid materials

NEW



Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
305 x 4 x 20	—	100 m/s	6400 rpm	10	354419
305 x 4 x 22,23	—	100 m/s	6400 rpm	10	354418
305 x 4 x 25,4	—	100 m/s	6400 rpm	10	354417
356 x 4 x 20	—	100 m/s	5500 rpm	10	354416
356 x 4 x 22,23	—	100 m/s	5500 rpm	10	354415
356 x 4 x 25,4	—	100 m/s	5500 rpm	10	354414

Cutting-off wheel

A 624 SX SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ □ □ □
Aggression	■ ■ ■ ■ ■ ■ ■
Service life	■ ■ ■ ■ ■ □ □



Applications:	
Steel	●

Advantages: For universal use on all rail types - Top performing product for lower powered machines (<5kW) and hard rails - Fast cutting, due to softer bond - For use on gas powered cutting-off machines with a cutting speed of 100 m/s and clamping device

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
305 x 3,5 x 22,23	—	100 m/s	6400 rpm	10	353111
356 x 4 x 22,23	—	100 m/s	5500 rpm	10	351433
356 x 4 x 25,4	—	100 m/s	5500 rpm	10	340641
406 x 4 x 25,4	—	100 m/s	4800 rpm	10	351436

Kronenflex® large cutting-off wheels

for petrol driven saw / cutter with clamping device



Cutting-off wheel

A 924 SX SPECIAL



Class	<i>SPECIAL</i>
Bond	■ ■ ■ ■ ■ ■ ■ □
Aggression	■ ■ ■ ■ ■ ■ ■ ■
Service life	■ ■ ■ ■ ■ ■ ■ ■



Applications:	
Steel	●

Advantages: For universal use on all rail types - Top performing product for high powered machines (>5kW) and hard rails - For use on gas powered cutting-off machines with a cutting speed of 100 m/s and clamping device - Excellent service life

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
305 x 3,5 x 22,23	■ ■ ■ ■ ■ ■ ■ ■	100 m/s	6400 rpm	10	353093
356 x 4 x 22,23	■ ■ ■ ■ ■ ■ ■ ■	100 m/s	5500 rpm	10	352325
356 x 4 x 25,4	■ ■ ■ ■ ■ ■ ■ ■	100 m/s	5500 rpm	10	353097
406 x 4 x 25,4	■ ■ ■ ■ ■ ■ ■ ■	100 m/s	4800 rpm	10	352324

Kronenflex® large cutting-off wheels

for stationary cutting

Cutting-off wheel

A 24 R

SUPRA



Class SUPRA

Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ ■ □ □

Applications:

Steel	●
Stainless steel	○
Castings	○

Advantages: Optimized combination for use on steel - Can be used on stainless steel - Good cutting properties - Optimal for stationary 3 - 5 kW cutting-off machine

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
250 x 3 x 32	—	100 m/s	7600 rpm	10	2465
300 x 3 x 22,23	—	100 m/s	6400 rpm	10	71365
300 x 3 x 25,4	—	100 m/s	6400 rpm	10	6793
300 x 3 x 30	—	100 m/s	6400 rpm	10	13524
300 x 3 x 32	—	100 m/s	6400 rpm	10	6807
350 x 3,5 x 25,4	—	100 m/s	5500 rpm	10	13528
350 x 3,5 x 32	—	100 m/s	5500 rpm	10	13536
400 x 4,5 x 25,4	—	100 m/s	4800 rpm	10	292933
400 x 4,5 x 32	—	100 m/s	4800 rpm	10	292932
400 x 4,5 x 40	—	100 m/s	4800 rpm	10	296567

Cutting-off wheel INOX

A 24 N

SUPRA



Class SUPRA

Bond	■ ■ ■ □ □ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ ■ □ □

Applications:

Stainless steel	●
Steel	○
Aluminium	○

Advantages: Hardened aluminium oxide - Special combination prevents smearing and clogging - Optimal for stationary 3 - 5 kW cutting-off machines

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
350 x 3,5 x 25,4	—	100 m/s	5500 rpm	10	13527

Kronenflex® large cutting-off wheels

for chop saws



Cutting-off wheel

A 330 EXTRA



Class	EXTRA
Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □



Applications:	
Steel	●
Stainless steel	①
Aluminium	①
Castings	①

Advantages: More stability during cutting due to two glass fibre reinforcement mesh - Good cutting speed with a long service life - Recommended for various materials and different profiles - Usable on chop saws in craft and industry

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
300 x 2,5 x 25,4	—	80 m/s	5100 rpm	10	353327
350 x 2,5 x 25,4	—	80 m/s	4400 rpm	10	339069
406 x 3 x 25,4	—	80 m/s	3800 rpm	10	353329

Cutting-off wheel

A 630 N SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □



Applications:	
Steel	●
Stainless steel	①
Aluminium	①
Castings	①

Advantages: Aggressive model with an outstanding service life - An exceptional choice for the cutting of solid material - Bond optimized for universal use - Low thermal load - Minimum burr formation

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
300 x 2,5 x 25,4	—	80 m/s	5100 rpm	10	353325
350 x 2,5 x 25,4	—	80 m/s	4400 rpm	10	339070
406 x 3,2 x 25,4	—	80 m/s	3800 rpm	10	353328

Kronenflex® large cutting-off wheels

for chop saws

Cutting-off wheel

A 930 N SPECIAL



Class	SPECIAL
Bond	■■■■■□
Aggression	■■■■■■■
Service life	■■■■■■■



Applications:	
Steel	●
Stainless steel	○
Aluminium	○
Castings	○

Advantages: Ultimate aggression and service life for universal use (pipes, profiles, solid material) - Low thermal load and minimum burr formation due to one glass fibre reinforcement mesh - An exceptional choice for 110 volt machines and the cutting of solid material

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
300 x 2,5 x 25,4	—	80 m/s	5100 rpm	10	322627
350 x 3 x 25,4	—	80 m/s	4400 rpm	10	322628

Notes



Cutting-off wheels



Kronenflex® grinding discs

About the product

Kronenflex® grinding discs are characterised by their permanent high level of attack and maximum stock removal. The optimum relationship between performance and service life is guaranteed up to the complete use of the disc.

Kronenflex® grinding discs are used in all major surface grinding applications, as well as for edge bevelling and burr removal. Klingspor offers professional advice in selecting the right grinding disc for your application.

From general metalworking to material-related applications in steel, stainless steel and NF metals, to the more specialised requirements of the nuclear industry, Klingspor has the products you need. Discs for stone grinding and cup grinding wheels round off our range.

Our engineers are standing by to help you, should you have specific problems or technical questions. You may take advantage of our technical consulting services whether at Klingspor or directly on site.

You will find important information on the label marking, product lines, design, safety and application of grinding discs starting on page 243.

Practical tips

The rule of thumb also applies to grinding discs: the harder the material, the softer the bond of the grinding disc.

In addition, the application plays a very decisive role.

Corners and burrs have very sharp edges and easily tear the grit out of the bond. We recommend the use of a hard bond.

If on the other hand one is working on surfaces i.e. small welded seams, a disc that is too hard would easily become dull and no longer grip the material. The disc would achieve a good service life, but this would result in a low stock removal rate and high work costs.

For finish grinding the best disc bond is a medium or soft disc bond.

		Material applications													
Type	Thickness [mm]	Steel	Hardened steels	Tool steel	Stainless steel	High alloy steels	Corrosion and acid proof steels	Aluminium	Bronze	Copper	Brass	Zinc die-casting	Cast iron	Stone / concrete	Page
A 24 EXTRA	6,0–8,0	●	○	○	○	○	○					○	○		284
A 24 EXTRA T	6,0–8,0	●	○	○	○	○	○						○		284
A 24 R SUPRA	4,0–10	●	●	●	○	○	○						○		285
A 24 R/01 SPECIAL	4,0	●	●	●	○	○	○								285
A 24 N SUPRA INOX	6,0–8,0	○	●	○	●	●	●								286
A 24 R/36 SPECIAL	6,0	○	○	○	●	●	●								286
A 46 N SUPRA	6,0–8,0							●	○	○	○	○			287
A 46 VZ SPECIAL	2,0	○	○	●	●	●	●					○			287
A 624 T SUPRA	6,0	●	●	●	●	○	○					○	●		288
C 24 R SUPRA	6												○	●	288
A 16 R SUPRA	55	●											○		289
A 30 R SUPRA	55	●													289
C 16 R SUPRA	55												○	●	290
C 30 R SUPRA	55												○	●	290
● = main application ○ = possible applications															

● = main application ○ = possible applications

Kronenflex® grinding discs

for hand held machines

Grinding disc

A 24 EXTRA



Class	EXTRA
Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □

Applications:
Metals ●



Advantages: Standard disc with excellent price-performance ratio - For universal use in metal-working - Excellent results on all standard angle grinders

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 6 x 16		80 m/s	15300 rpm	10	189004
115 x 6 x 22,23		80 m/s	13300 rpm	10	188465
115 x 6 x 22,23 X-LOCK		80 m/s	13300 rpm	10	351253
125 x 6 x 22,23		80 m/s	12200 rpm	10	188466
125 x 6 x 22,23 X-LOCK		80 m/s	12200 rpm	10	351252
150 x 6 x 22,23		80 m/s	10200 rpm	10	235371
180 x 6 x 22,23		80 m/s	8500 rpm	10	13444
180 x 8 x 22,23		80 m/s	8500 rpm	10	13446
230 x 6 x 22,23		80 m/s	6600 rpm	10	13447
230 x 8 x 22,23		80 m/s	6600 rpm	10	13448

Grinding disc

A 24 EXTRA T



Class	EXTRA
Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ □ □ □ □
Service life	■ ■ ■ ■ □ □ □

Applications:
Metals ●

Advantages: Extra hard grinding disc - Optimal for edge work and for removal of stubborn burrs

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
180 x 6 x 22,23		80 m/s	8500 rpm	10	13794
180 x 8 x 22,23		80 m/s	8500 rpm	10	13445















Grinding disc

A 24 R SUPRA



Class	SUPRA	Applications:
Bond	■ ■ ■ ■ □ □ □	Steel ●
Aggression	■ ■ ■ ■ ■ □ □	Stainless steel ○
Service life	■ ■ ■ ■ ■ □ □	Castings ○

Advantages: With optimised recipe for use on steel - Also suitable for use on stainless steel - Large product range

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
100 x 4 x 16		80 m/s	15300 rpm	10	13400
100 x 6 x 16		80 m/s	15300 rpm	10	6578
115 x 4 x 22,23		80 m/s	13300 rpm	10	13746
115 x 6 x 22,23		80 m/s	13300 rpm	10	13401
125 x 4 x 22,23		80 m/s	12200 rpm	10	240831
125 x 6 x 22,23		80 m/s	12200 rpm	10	13402
150 x 6 x 22,23		80 m/s	10200 rpm	10	13403
180 x 10 x 22,23		80 m/s	8500 rpm	10	13423
180 x 4 x 22,23		80 m/s	8500 rpm	10	13408
180 x 7 x 22,23		80 m/s	8500 rpm	10	13413
180 x 8 x 22,23		80 m/s	8500 rpm	10	13418
230 x 4 x 22,23		80 m/s	6600 rpm	10	13428
230 x 6 x 22,23		80 m/s	6600 rpm	10	13433
230 x 8 x 22,23		80 m/s	6600 rpm	10	13438



Grinding disc

A 24 R/01 SPECIAL



Class	SPECIAL	Applications:
Bond	■ ■ ■ ■ □ □ □	Steel ●
Aggression	■ ■ ■ ■ ■ □ □	Stainless steel ○
Service life	■ ■ ■ □ □ □ □	

Advantages: Special disc for pipeline and tank construction - Suitable for root seams - For repair of weld seams

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
125 x 4 x 22,23		80 m/s	12200 rpm	10	130825
180 x 4 x 22,23		80 m/s	8500 rpm	10	13756

Kronenflex® grinding discs

for hand held machines

Grinding disc INOX

A 24 N

SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ □ □ □ □
Aggression	■ ■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □ □

Applications:	
Stainless steel	●
Aluminium	○

Advantages: High removal rate on stainless steel - Optimal ratio between removal and wear

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 6 x 22,23		80 m/s	13300 rpm	10	2923
125 x 6 x 22,23		80 m/s	12200 rpm	10	2922
180 x 4 x 22,23		80 m/s	8500 rpm	10	13407
180 x 6 x 22,23		80 m/s	8500 rpm	10	13412
180 x 8 x 22,23		80 m/s	8500 rpm	10	13417
230 x 6 x 22,23		80 m/s	6600 rpm	10	13432

Grinding disc

A 24 R/36

SPECIAL



Class	SPECIAL
Bond	■ ■ ■ ■ □ □ □ □
Aggression	■ ■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □ □

Applications:	
Stainless steel	●

Advantages: Special wheel for the nuclear industry - Free of iron, sulfur and chlorine - Optimal ratio between removal and wear

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 6 x 22,23		80 m/s	13300 rpm	10	2488
125 x 6 x 22,23		80 m/s	12200 rpm	10	2830
180 x 6 x 22,23		80 m/s	8500 rpm	10	2463

Grinding disc





A 46 N SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ □ □ □ □
Aggression	■ ■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □ □

Applications:	
Aluminium	●
NF metals	①

Advantages: No clogging when used on non-ferrous metals - Optimal ratio between removal and wear

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 6 x 22,23		80 m/s	13300 rpm	10	6622
125 x 6 x 22,23		80 m/s	12200 rpm	10	2226
180 x 6 x 22,23		80 m/s	8500 rpm	10	13410
180 x 8 x 22,23		80 m/s	8500 rpm	10	13415

Thin cutting-off wheel & grinding disc



A 46 VZ SPECIAL



Class	SPECIAL
Bond	■ ■ ■ ■ ■ □
Aggression	■ ■ ■ ■ ■ □
Service life	■ ■ ■ ■ ■ □

Applications:	
Stainless steel	●
Steel	●
NF metals	①

Advantages: Long service life - Multi-purpose: cutting off and light rough grinding with one wheel - High aggressiveness in cutting - No change of wheel necessary

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 2 x 22,23		80 m/s	13300 rpm	25	298176
125 x 2 x 22,23		80 m/s	12200 rpm	25	298177

Kronenflex® grinding discs

for hand held machines

Grinding disc

A 624 T SUPRA



Class	SUPRA		Applications:	
Bond	■ ■ ■ ■ ■ ■ ■ ■	■	Steel	●
Aggression	■ ■ ■ ■ ■ ■ ■ ■	■	Stainless steel	●
Service life	■ ■ ■ ■ ■ ■ ■ ■	■	Castings	●

Advantages: Special recipe for use on various materials - Optimal ratio between removal and wear

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 6 x 22,23		80 m/s	13300 rpm	10	325215
125 x 6 x 22,23		80 m/s	12200 rpm	10	325216
180 x 6 x 22,23		80 m/s	8500 rpm	10	325217
230 x 6 x 22,23		80 m/s	6600 rpm	10	325218

Grinding disc

C 24 R SUPRA



Class	SUPRA		Applications:	
Bond	■ ■ ■ ■ ■ ■ ■ ■	■	Stone/Concrete	●
Aggression	■ ■ ■ ■ ■ ■ ■ ■	■	Castings	●
Service life	■ ■ ■ ■ ■ ■ ■ ■	■		

Advantages: Ideal for use on stone and mineral materials - High removal rate due to sharp, coarse SiC grain

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
115 x 6 x 22,23		80 m/s	13300 rpm	10	6664
125 x 6 x 22,23		80 m/s	12200 rpm	10	6665
180 x 6 x 22,23		80 m/s	8500 rpm	10	13409

Kronenflex® cup grinding wheels

for hand held machines



Cup grinding wheel

A 16 R SUPRA



Class	SUPRA	Applications:
Bond	■ ■ ■ ■ □ □ □	Steel ●
Aggression	■ ■ ■ ■ □ □ □	Castings ○
Service life	■ ■ ■ □ □ □ □	

Advantages: For surface grinding and finish grinding of weld seams - Coarse grain for optimized aggressiveness

Diameter x Height x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
110 x 55 x 22,23		50 m/s	8600 rpm	6	13729

Cup grinding wheel

A 30 R SUPRA



Class	SUPRA	Applications:
Bond	■ ■ ■ ■ □ □ □	Steel ●
Aggression	■ ■ ■ ■ □ □ □	
Service life	■ ■ ■ □ □ □ □	

Advantages: For surface grinding and finish grinding of weld seams - Optimized aggressiveness and long service life

Diameter x Height x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
110 x 55 x 22,23		50 m/s	8600 rpm	6	13728

Please observe: Use only on angle grinders with cup grinding wheel guard!

Kronenflex® cup grinding wheels

for hand held machines

Cup grinding wheel

C 16 R

SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ □ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ □ □ □ □

Applications:	
Stone/Concrete	●
Castings	○

Advantages: For use on surfaces and edges - For stone and mineral materials - Optimized aggressiveness due to sharp, coarse SiC grain

Diameter x Height x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
110 x 55 x 22,23		50 m/s	8600 rpm	6	13727

Cup grinding wheel

C 30 R

SUPRA



Class	SUPRA
Bond	■ ■ ■ ■ □ □ □
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ □ □ □ □

Applications:	
Stone/Concrete	●
Castings	○

Advantages: For use on surfaces and edges - Ideal for stone and mineral materials due to sharp, coarse SiC grain

Diameter x Height x Bore in mm	Form	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
110 x 55 x 22,23		50 m/s	8600 rpm	6	13726

Please observe: Use only on angle grinders with cup grinding wheel guard!

Notes



Grinding discs



Diamond tools



Remain in full control of all processes: staying true to this motto, Klingspor managed to rise to be one of the world's first manufacturers of grinding and cutting tools. The company is now applying their extensive experience in research and development and manufacturing, their global network of distributors and their highly efficient service and logistics structure to their diamond tools.

Product	Machine	Application - Material	SPECIAL	SUPRA	EXTRA	Page
Diamond cutting blades Ø 100 - 230 mm	Angle grinder	Universal	DT 900 U	DT 600 U DT 612 UT	DT 300 U DT 350 U	298-302
		Concrete	DT 900 UD DT 900 UT DT 900 B		DT 300 UT DT 310 UT DT 350 B DT 350 BT	302-303
		Granite	DT 900 G			304
		Tiles	DT 900 FL DT 900 FT DT 900 FP	DT 600 GU DT 600 F	DT 300 F	305-307
		Mortar joints		DN 600 U		308
		All Cut Metal		DT 600 ACM		307
		All Cut Rescue	DT 900 ACR			308
Cup grinding wheels	Angle grinder	Concrete		DS 600 B DS 600 S	DS 300 B	309-310
		Lime sandstone, screed and abrasive materials		DS 600 A		310
		Adapter M14			DZ 114	312
		Epoxy resin, tile adhesive	DT 900 PKD	DT 650 PKD		311
Diamond cutting blades Ø 250 - 500 mm	Petrol powered cutter, Table saw, Joint cutter	Universal	DT 900 U DT 900 US	DT 600 U DT 612 UT	DT 300 U DT 310 UT DT 350 U	313-317
		Tiles	DT 900 FL	DT 600 F	DT 300 F	317-318
		All Cut Rescue	DT 900 ACR			319
		Asphalt	DT 902 A DT 910 A	DT 602 A DT 612 A	DT 350 A	320-321
		Asphalt / concrete		DT 612 AB	DT 350 AB	322
		Green concrete	DT 910 BF			323
		Concrete	DT 900 B DT 902 B DT 910 B	DT 602 B	DT 350 B DT 350 BT	323-326
		Reduction rings			DZ 100 RR	326
Drill bits	Drill stand	Concrete	DR 912 B	DK 612 B DK 654 B		327-329
		Individual segments, ring segments	DO 900 B	DE 600 B		330
	Percussion drill	Concrete		DD 600 U		331
		Adapter kit			ADS 200	331
	Drilling machine	Tiles		DB 600 F		332
	Angle grinder	Tiles		DK 600 F		333
		Hole starting aid			ABH 80	334

Diamond tools

Applications guide

The three product lines

The right tool for every application: Klingspor diamond tools are available in three product lines that are colour-coded to provide the user with a quick overview of the most important materials for which the tools are suitable.



SPECIAL

Product line 900 – High performance tools offering outstanding cutting performance and service life. For users who need their tools to perform at peak output and reliability even if subjected to the most punishing applications.



SUPRA

Product line 600 – Professional tools with an exceptional price-performance ratio. For users who require diamond tools that deliver reliable and powerful performance every day.



EXTRA

Product line 300 – Brand name quality at an affordable price. For users who expect their tools to meet professional standards, but do not need to use them continuously.

1. Klingspor cat. number
2. Product group / type
3. Applications
4. Safety pictograms
5. Max. operating speed
6. Klingspor logo




7. Information about the manufacturer
8. Safety standard
9. Dimensions in mm and inches
10. Max. RPM
11. Rotational direction

Colour coding system of the Klingspor® diamond tools

Asphalt

Black




Tiles

Green



Stone / Fireproof

Blue




Concrete

Red



Universal

White



Metal

Grey



Special application

Yellow



Pictograms on the product pages



Wet and dry applications



Wet applications



Dry applications



Conical segment



Detenso steel core



Wet applications



Dry applications



Turbo segment



Drop segment



Inclined protective segment



Sandwich core

Diamond tools

Applications guide



1.

Standard gullet

- ▶ rapid feed rate
- ▶ exceptional cutting properties



2.

Turbo continuous rim

- ▶ exceptionally smooth operation
- ▶ clean cutting edges



3.

Continuous rim

- ▶ clean cutting edges
- ▶ work with superior precision
- ▶ short cutting times



4.

Turbo segments

- ▶ exceptionally smooth operation
- ▶ clean cutting edges
- ▶ fast cutting speed
- ▶ long service life



5.

Short segments

- ▶ first-rate cutting performance
- ▶ clean cutting edges



6.

Wide gullet

- ▶ high feed rate



7.

Narrow gullet

- ▶ clean cut
- ▶ exceptionally smooth operation thanks to narrow segment spacings



8.

Hammer segments


- ▶ prevent undercut and wear
- ▶ prevent segments tearing off
- ▶ optimal protection thanks to segments soldered in



9.

Continuous rim with special geometry

- ▶ for extra clean cutting edges
- ▶ soft and comfortable cutting performance



10.

Continuous rim with laser-cut slots

- ▶ for fine and clean cutting edges
- ▶ specially designed for ceramic and fine stoneware

Number of revolutions

Diamond tools made by Klingspor are high performance products and have been engineered to reach their highest level of performance at a level immediately below their maximum peripheral surface speeds. The maximum permissible values for motor speed and operating speed are indicated on every diamond blade. The table

below contains all permissible maximum speeds as a function of the diameter and the maximum permissible operating speed of the diamond tools.

		Maximum operating speed [m/s]									
Ø [mm]		30	35	40	45	50	55	60	70	80	100
	200	2865	3342	3820	4297	4775	5252	5730	6685	7640	
	230	2491	2906	3322	3737	4152	4567	4982	5813	6643	
	250	2292	2674	3056	3438	3820	4202	4584	5348	6112	
	300	1910	2228	2547	2865	3183	3502	3820	4456	5093	6360
	350	1637	1910	2183	2456	2728	3001	3274	3820	4366	5450
	400	1432	1671	1910	2149	2387	2626	2865	3342	3820	4770
	450	1273	1485	1698	1910	2122	2334	2547	2971	3395	4240
	500	1146	1337	1528	1719	1910	2101	2292	2674	3056	3810
	550	1042	1215	1389	1563	1736	1910	2084	2431	2778	
	600	955	1114	1273	1432	1592	1751	1910	2228	2547	


Motor speeds and cooling water quantity

The recommended speed range

The chart illustrates the ideal speed range for drill bits as a function of the diameter and the maximum permissible operating speed.

Recommended cooling water quantity


Drill bits require cooling with water regardless of the material on which they are used. Refer to the right side of the table for the recommended quantity of cooling water.

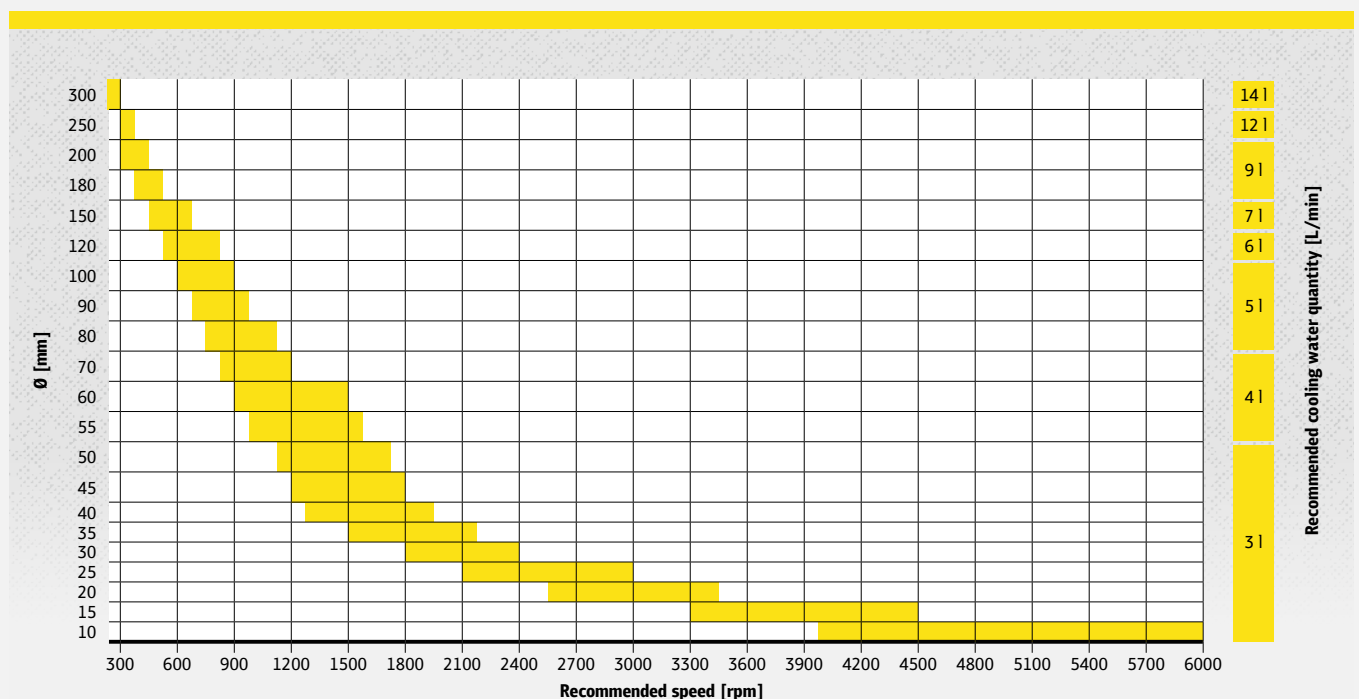

Diamond cutting blades for angle grinders

Diamond cutting blade

DT 300 U EXTRA



Properties

Design	Sintered
Segmentation	Standard
Aggression	■ ■ ■ □ □ □ □
Service life	■ ■ ■ □ □ □ □

Applications:

Construction materials	●
Concrete, universal	●

Advantages: Product for universal use on general construction materials - Excellent cutting performance - Great price-performance ratio

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	8 / 37,3 / 1,6 / 7	1	325345
125 x 22,23	80 m/s	12200 rpm	9 / 36,4 / 1,6 / 7	1	325346
180 x 22,23	80 m/s	8500 rpm	13 / 38,1 / 2 / 7	1	325347
230 x 22,23	80 m/s	6600 rpm	16 / 40,2 / 2,3 / 7	1	325348

Diamond cutting blade

DT 350 U EXTRA



XLOCK !

Properties

Design	Laser welded
Segmentation	Standard
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □

Applications:


Construction materials	●
Concrete, universal	●

Advantages: Product with laser-welded standard segments for universal use on general construction material - Smooth, fast and low-vibration cutting with unmatched service life - Optimum price-performance ratio

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	8 / 33 / 2,4 / 10	1	336214
115 x 22,23 X-LOCK	80 m/s	13300 rpm	8 / 33 / 2,4 / 10	1	350463
125 x 22,23	80 m/s	12200 rpm	9 / 33 / 2,4 / 10	1	336215
125 x 22,23 X-LOCK	80 m/s	12200 rpm	9 / 33 / 2,4 / 10	1	350464
180 x 22,23	80 m/s	8500 rpm	11 / 42 / 2,6 / 10	1	336216
230 x 22,23	80 m/s	6600 rpm	15 / 42 / 2,6 / 10	1	336219

Diamond cutting blade

DT 600 U SUPRA



Properties

Design	Laser welded
Segmentation	Short segments
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □



Applications:

Construction materials	●
Concrete, universal	●
Cured concrete, reinforced	●
Chalky sandstone	●

XLOCK !

Advantages: Suitable for a various range of applications - First-rate cutting performance - Exceptional service life thanks to the use of premium grade raw materials and diamonds - Clean cutting edges

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
100 x 16	80 m/s	15300 rpm	11 / 20 / 2,4 / 9	1	325025
115 x 22,23	80 m/s	13300 rpm	13 / 20 / 2,4 / 9	1	322630
115 x 22,23 X-LOCK	80 m/s	13300 rpm	13 / 20 / 2,4 / 9	1	350461
125 x 22,23	80 m/s	12200 rpm	15 / 20 / 2,4 / 9	1	322631
125 x 22,23 X-LOCK	80 m/s	12200 rpm	15 / 20 / 2,4 / 9	1	350462
140 x 22,23	80 m/s	11000 rpm	17 / 20 / 2,4 / 9	1	325046
150 x 22,23	80 m/s	10200 rpm	18 / 20 / 2,4 / 9	1	322632
180 x 22,23	80 m/s	8500 rpm	22 / 20 / 2,6 / 9	1	322633
230 x 22,23	80 m/s	6600 rpm	30 / 20 / 2,6 / 9	1	322634

Diamond cutting blade

DT 612 UT SUPRA



Properties

Design	Laser welded
Segmentation	Turbo
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □



Applications:

Construction materials	●
Concrete, universal	●
Cured concrete, reinforced	●
Chalky sandstone	●

Advantages: Special turbo segments for an extremely high cutting speed on almost all hard materials - Excellent service life even on reinforced concrete

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	8 / 33 / 2,4 / 12	1	334044
125 x 22,23	80 m/s	12200 rpm	9 / 33 / 2,4 / 12	1	334045
150 x 22,23	80 m/s	10200 rpm	11 / 33 / 2,4 / 12	1	345388
180 x 22,23	80 m/s	8500 rpm	11 / 42 / 2,6 / 12	1	334046
230 x 22,23	80 m/s	6600 rpm	15 / 42 / 2,6 / 12	1	334047

Diamond cutting blades for angle grinders

Diamond cutting blade

DT 900 U SPECIAL



Properties

Design	Laser welded
Segmentation	Turbo
Aggression	■■■■■■■■■
Service life	■■■■■■■■■



Applications:

Construction materials	●	Hard stone	①
Concrete, universal	●		
Cured concrete, reinforced	●		
Chalky sandstone	●		

Advantages: Ultra fast cutting speed on almost any hard material thanks to specially designed turbo segments - Further increased service life thanks to titanium-coated diamonds even on reinforced concrete

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	8 / 33 / 2,4 / 12	1	325206
125 x 22,23	80 m/s	12200 rpm	9 / 33 / 2,4 / 12	1	325209
180 x 22,23	80 m/s	8500 rpm	11 / 42 / 2,6 / 12	1	325028
230 x 22,23	80 m/s	6600 rpm	15 / 42 / 2,6 / 12	1	325045

Diamond cutting blade

DT 900 UD SPECIAL



Properties

Design	Laser welded
Segmentation	Turbo
Aggression	■■■■■■■■■
Service life	■■■■■■■■■



Applications:

Cured concrete, reinforced	●	Hard stone	①
Concrete, universal	●		
Construction materials	●		
Chalky sandstone	●		

Advantages: Ultra fast cutting speed thanks to specially designed turbo segments - Low vibration detenso core for efficient noise reduction - Extended service life thanks to titanium-coated diamonds, suitable for use on almost any hard material

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
230 x 22,23	80 m/s	6600 rpm	15 / 42 / 2,6 / 12	1	325210

Diamond cutting blade

DT 300 UT EXTRA



Properties

Design	Sintered
Segmentation	Turbo continuous rim
Aggression	■ ■ ■ ■ □ □ □ □
Service life	■ ■ ■ □ □ □ □ □



Applications:

Construction materials	●
Concrete, universal	●
Roof tiles	●

Advantages: Suitable for a various range of applications - Excellent cutting performance - Great price-performance ratio - Turbo segments for clean and nick-free edges - Ideal for roofers

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	80 m/s	15300 rpm	CR / CR / 1,9 / 7	1	330625
115 x 22,23	80 m/s	13300 rpm	CR / CR / 1,9 / 7	1	325353
125 x 22,23	80 m/s	12200 rpm	CR / CR / 1,9 / 7	1	325354
180 x 22,23	80 m/s	8500 rpm	CR / CR / 2,2 / 7	1	325355
230 x 22,23	80 m/s	6600 rpm	CR / CR / 2,5 / 7	1	325356

Diamond cutting blade

DT 310 UT EXTRA



Properties

Design	Sintered
Segmentation	Turbo continuous rim
Aggression	■ ■ ■ ■ □ □ □ □
Service life	■ ■ ■ □ □ □ □ □



Applications:

Construction materials	●
Concrete, universal	●
Roof tiles	●

Advantages: All-purpose - Excellent cutting performance, great price-performance ratio - Turbo segments for clean and nick-free edges - Ideal for roofers - For cutting clay and roof tiles

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	80 m/s	15300 rpm	CR / CR / 2 / 10	1	334087
115 x 22,23	80 m/s	13300 rpm	CR / CR / 2 / 10	1	334088
125 x 22,23	80 m/s	12200 rpm	CR / CR / 2 / 10	1	334089
180 x 22,23	80 m/s	8500 rpm	CR / CR / 2,5 / 10	1	334090
230 x 22,23	80 m/s	6600 rpm	CR / CR / 2,5 / 10	1	334091

Diamond cutting blades for angle grinders

Diamond cutting blade

DT 900 UT SPECIAL



Properties

Design	Sintered
Segmentation	Turbo continuous rim
Aggression	■■■■■□
Service life	■■■■■□



Applications:

Concrete, universal	●
Construction materials	●
Roof tiles	●

Advantages: Wave-shaped steel core - Use on construction material - Clean cutting edges - High aggressiveness

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	80 m/s	15300 rpm	CR / CR / 2,2 / 10	1	330626
115 x 22,23	80 m/s	13300 rpm	CR / CR / 2,2 / 10	1	325364
125 x 22,23	80 m/s	12200 rpm	CR / CR / 2,2 / 10	1	325365
180 x 22,23	80 m/s	8500 rpm	CR / CR / 2,5 / 10	1	325366
230 x 22,23	80 m/s	6600 rpm	CR / CR / 2,5 / 10	1	325367

Diamond cutting blade

DT 350 B EXTRA



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■■■■■□
Service life	■■■■■□



Applications:


Concrete	●
Cured concrete, reinforced	●

Advantages: Diamond cutting disc with good price-performance ratio for working on concrete materials - Fast cutting with low vibration - Optimum service life

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
125 x 22,23	80 m/s	12200 rpm	9 / 33 / 2,4 / 10	1	339828
150 x 22,23	80 m/s	10200 rpm	11 / 33 / 2,4 / 10	1	345382
230 x 22,23	80 m/s	6600 rpm	15 / 42 / 2,6 / 10	1	339829

Diamond cutting blade

DT 350 BT EXTRA



Properties

Design	Laser welded
Segmentation	Turbo
Aggression	■■■■■□
Service life	■■■■■□



Applications:

Concrete	●
Cured concrete, reinforced	⦿

NEW !

Advantages: Special turbo segments for an extremely high cutting speed on concrete and all concrete products - Fast and easy cutting with low vibration - Optimum service life - Optimum price-performance ratio

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	8 / 33 / 2,4 / 10	1	354790
125 x 22,23	80 m/s	12200 rpm	9 / 33 / 2,4 / 10	1	354791
150 x 22,23	80 m/s	10200 rpm	11 / 33 / 2,4 / 10	1	354792
180 x 22,23	80 m/s	8500 rpm	11 / 42 / 2,6 / 10	1	354793
230 x 22,23	80 m/s	6600 rpm	15 / 42 / 2,6 / 10	1	354794

Diamond cutting blade

DT 900 B SPECIAL



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■■■■■
Service life	■■■■■



Applications:

Cured concrete, reinforced	●
Concrete, universal	●
Chalky sandstone	⦿
Construction materials	⦿

Advantages: Titanium-coated diamonds for first-rate cutting performance - Fast cutting speed even on reinforced concrete - Unrivalled service life - Designed for professional applications on concrete

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	8 / 33 / 2,4 / 12	1	325205
125 x 22,23	80 m/s	12200 rpm	9 / 33 / 2,4 / 12	1	325208
180 x 22,23	80 m/s	8500 rpm	11 / 42 / 2,6 / 12	1	325027
230 x 22,23	80 m/s	6600 rpm	15 / 42 / 2,6 / 12	1	325034

Diamond cutting blades for angle grinders

Diamond cutting blade

DT 600 GU SUPRA



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■■■■■□□
Service life	■■■■■□□



Applications:

Granite	●
Terrazzo	●

Advantages: High stock removal rate - Excellent service life - Clean cutting - Great price-performance ratio - Suitable for all types of granite

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	8 / 33 / 2,4 / 10	1	336614
125 x 22,23	80 m/s	12200 rpm	9 / 33 / 2,4 / 10	1	336615
180 x 22,23	80 m/s	8500 rpm	11 / 42 / 2,6 / 10	1	336616
230 x 22,23	80 m/s	6600 rpm	15 / 42 / 2,6 / 10	1	336617

Diamond cutting blade

DT 900 G SPECIAL



Properties

Design	Laser welded
Segmentation	Narrow gullet
Aggression	■■■■■■■
Service life	■■■■■■■



Applications:

Granite	●
Porphyry, quartzite	●
Terrazzo	●

Advantages: Outstanding cutting properties thanks to particularly narrow spacing of the tapered segments - Low vibration denso core for efficient noise reduction - Smooth and quiet cutting with clean cutting edges - Long service life - Also the perfect choice for all types of granite including porphyry and quartzite

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	12 / 28 / 2,5 / 12	1	325029
125 x 22,23	80 m/s	12200 rpm	13 / 28 / 2,5 / 12	1	325031
180 x 22,23	80 m/s	8500 rpm	18 / 28 / 2,8 / 12	1	325049
230 x 22,23	80 m/s	6600 rpm	24 / 28 / 2,8 / 12	1	325115

Diamond cutting blade

DT 300 F EXTRA



Properties

Design	Sintered
Segmentation	Continuous rim
Aggression	■■■■□□□□
Service life	■■■■□□□□



Applications:

Tiles	●
Stove tiles	●

Advantages: Clean edges when used for cutting tiles - Attractively priced quality wheel

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	80 m/s	15300 rpm	CR / CR / 1,6 / 7	1	330623
115 x 22,23	80 m/s	13300 rpm	CR / CR / 1,6 / 7	1	325357
125 x 22,23	80 m/s	12200 rpm	CR / CR / 1,6 / 7	1	325358
180 x 22,23	80 m/s	8500 rpm	CR / CR / 1,6 / 7	1	325359
230 x 22,23	80 m/s	6600 rpm	CR / CR / 1,9 / 7	1	325360

Diamond cutting blade

DT 600 F SUPRA



Properties

Design	Sintered
Segmentation	Continuous rim
Aggression	■■■■□□□□
Service life	■■■■□□□□



Applications:

Stoneware	●
Stove tiles	●
Stove tiles, glazed	●

Advantages: Professional wheel for tiles and feldspar - For precision working - Short cutting-off times - Clean edges

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	80 m/s	15300 rpm	CR / CR / 1,6 / 7	1	330624
115 x 22,23	80 m/s	13300 rpm	CR / CR / 1,6 / 7	1	325368
125 x 22,23	80 m/s	12200 rpm	CR / CR / 1,6 / 7	1	325369
150 x 22,23	80 m/s	10200 rpm	CR / CR / 1,6 / 7	1	325370
180 x 22,23	80 m/s	8500 rpm	CR / CR / 1,6 / 7	1	325371
230 x 22,23	80 m/s	6600 rpm	CR / CR / 1,9 / 7	1	325372

Diamond cutting blades for angle grinders

Diamond cutting blade

DT 900 FL SPECIAL



Properties

Design	Sintered
Segmentation	Continuous rim, with laser-cut slots
Aggression	■■■■■■■□
Service life	■■■■■■■□



Applications:

Wall tiles	●	Marble	●
Floor tiles	●		
Porcelain	●		
Ceramics	●		

Advantages: High-precision tool for hard wall and floor tiles - Laser-cut slots for exceptionally smooth operation and perfectly cut edges

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	CR / CR / 1,4 / 7	1	331042
125 x 22,23	80 m/s	12200 rpm	CR / CR / 1,4 / 7	1	331043
180 x 22,23	80 m/s	8500 rpm	CR / CR / 1,6 / 7	1	331044
230 x 22,23	80 m/s	6600 rpm	CR / CR / 1,8 / 7	1	331041

Diamond cutting blade

DT 900 FT SPECIAL



Properties

Design	Sintered
Segmentation	Turbo continuous rim
Aggression	■■■■■■■
Service life	■■■■■■■□



Applications:

Stoneware	●
Stove tiles	●
Stove tiles, glazed	●
Granite	●

Advantages: 1,4 mm thin professional blade for extremely demanding applications - Work results of superior quality - Continuous rim with turbo segments - Clean and nick-free edges

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	80 m/s	15300 rpm	CR / CR / 1,4 / 7,5	1	330627
115 x 22,23	80 m/s	13300 rpm	CR / CR / 1,4 / 7,5	1	325392
125 x 22,23	80 m/s	12200 rpm	CR / CR / 1,4 / 7,5	1	325393
180 x 22,23	80 m/s	8500 rpm	CR / CR / 2 / 7	1	330628
230 x 22,23	80 m/s	6600 rpm	CR / CR / 2 / 7	1	330629

Diamond cutting blade

DT 900 FP SPECIAL



Properties

Design	Sintered
Segmentation	Continuous rim, with special geometry
Aggression	■■■■■■■
Service life	■■■■■■■□



Applications:

Hard floor tiles	●	Ceramics	●
Porcelain	●		
Hard wall tiles	●		
Hard fine stoneware	●		

Advantages: Extra thin disc for hard tiles and porcelain - The special geometry allows for superior cutting speeds and perfectly cut edges

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	CR / CR / 1,4 / 10	1	331039
125 x 22,23	80 m/s	12200 rpm	CR / CR / 1,4 / 10	1	331040

Diamond cutting blade

DT 600 ACM SUPRA



Properties

Design	Vacuum-brazed
Segmentation	Standard
Aggression	■■■■■■■□
Service life	■■■■■■■□



Applications:

Steel	●	Castings	●
Stainless steel	●	Aluminium	●
Metals	●		
NF metals	●		

Advantages: Vacuum-brazed disc for almost all metallic materials - No wear behaviour as with conventional diamond cutting blades and therefore almost odourless and dirt-free - Extra thin blade for high cutting performance and aggressiveness

NEW !

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	8 / 42 / 1,3 / 1,8	1	355720
125 x 22,23	80 m/s	12200 rpm	10 / 36 / 1,3 / 1,8	1	355722
230 x 22,23	80 m/s	8500 rpm	16 / 42 / 1,6 / 1,8	1	355721

Diamond cutting blades for angle grinders

Diamond cutting blade

DT 900 ACR SPECIAL



Properties

Design	Vacuum-brazed
Segmentation	Narrow gullet
Aggression	■■■■■■■■
Service life	■■■■■■■■



Applications:

Construction materials	●	Plastic	●
Concrete, universal	●	Rubber	●
Glass	●		
Wood-based materials	●		

NEW



Advantages: Vacuum-brazed diamond cutting blade for almost all materials - Very wide range of applications due to special manufacturing process - 10 mm high diamond coating for a good service life and an aggressive cut for very different and demanding materials - Ideal for rescue services

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
115 x 22,23	80 m/s	13300 rpm	6 / 56 / 2,5 / 10	1	355723
125 x 22,23	80 m/s	12200 rpm	6 / 45 / 2,5 / 10	1	355724
230 x 22,23	80 m/s	8500 rpm	12 / 56 / 3,1 / 10	1	355725

Broaching wheel

DN 600 U SUPRA



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■■■■■■■□
Service life	■■■■■■■□



Applications:

Mortar joints	●
Plaster	●
Aerated concrete	●

Advantages: Special broaching wheel with robust design for removing mortar from bricks, natural stones and clinker facades - Specially designed hammer segments - Optimum protection of the steel core

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
80 x 22,23	80 m/s	19100 rpm	6 / 30 / 6 / 7	1	330630
115 x 22,23	80 m/s	13300 rpm	9 / 32 / 6 / 7	1	330631
115 x 22,23	80 m/s	13300 rpm	9 / 32 / 8 / 7	1	330658
115 x 22,23	80 m/s	13300 rpm	9 / 32 / 10 / 7	1	330663
115 x 22,23	80 m/s	13300 rpm	9 / 33 / 4,5 / 7	1	325380
125 x 22,23	80 m/s	12200 rpm	10 / 32 / 6 / 7	1	330632
125 x 22,23	80 m/s	12200 rpm	10 / 32 / 8 / 7	1	330662
125 x 22,23	80 m/s	12200 rpm	10 / 32 / 10 / 7	1	330664
125 x 22,23	80 m/s	12200 rpm	10 / 33 / 4,5 / 7	1	325381

Diamond cup grinding wheels for angle grinders



Diamond cup grinding wheel

DS 300 B EXTRA



Properties

Design	Brazed
Segmentation	Standard
Aggression	■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ □ □ □



Applications:

Concrete	●
Screed	●
Construction materials	●

Advantages: Double row cup grinding wheel with outstanding stock removal performance - High aggressiveness at low force requirements - Exceptional price-performance ratio - M14 adapter available, see DZ 114

Diameter x Bore in mm	Cup grinding wheel height in mm	Max. operating speed	Max. RPM	Segment in mm Number / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	20	80 m/s	15300 rpm	14 / 7 / 5,5	1	330622
115 x 22,23	20	80 m/s	13300 rpm	14 / 8,2 / 5,5	1	325361
125 x 22,23	24,5	80 m/s	12200 rpm	18 / 7 / 5	1	325362
180 x 22,23	30,5	80 m/s	8500 rpm	22 / 8 / 5	1	325363

Diamond cup grinding wheel

DS 600 B SUPRA



Properties

Design	Brazed
Segmentation	Standard
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □



Applications:

Concrete	●
Screed	●
Construction materials	●

Advantages: Double row cup grinding wheel for machining concrete and abrasive materials - Efficient dust extraction - Aggressive grinding performance - Long service life - M14 adapter available, see DZ 114

Diameter x Bore in mm	Cup grinding wheel height in mm	Max. operating speed	Max. RPM	Segment in mm Number / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	20	80 m/s	15300 rpm	16 / 8,5 / 5,5	1	330621
115 x 22,23	20	80 m/s	13300 rpm	16 / 8,2 / 5,5	1	325377
125 x 22,23	23,5	80 m/s	12200 rpm	20 / 7,2 / 5,5	1	325378
180 x 22,23	30,5	80 m/s	8500 rpm	24 / 8 / 5,5	1	325379

Diamond cup grinding wheels for angle grinders

Diamond cup grinding wheel

DS 600 S SUPRA



Properties

Design	Brazed
Segmentation	Standard
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □



Applications:

Concrete	●	Brickwork	●
Firebrick	●		
Natural stone	●		
Masonry	●		

Advantages: Excellent dust extraction thanks to specially designed (fan-shaped) opening - Low weight thanks to lightweight steel plate - Rugged performance and operation with minimum vibrations - M14 adapter available, see DZ 114

Diameter x Bore in mm	Cup grinding wheel height in mm	Max. operating speed	Max. RPM	Segment in mm Number / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	20,5	80 m/s	15300 rpm	16 / 7,2 / 5,5	1	331022
115 x 22,23	20,5	80 m/s	13300 rpm	16 / 7,2 / 5,5	1	331023
125 x 22,23	20,5	80 m/s	12200 rpm	16 / 7,2 / 5,5	1	331024
180 x 22,23	30,5	80 m/s	8500 rpm	24 / 7,8 / 5,5	1	331025

Diamond cup grinding wheel

DS 600 A SUPRA



Properties

Design	Brazed
Segmentation	Standard
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □



Applications:

Asphalt	●	Sandstone	●
Abrasive materials	●		
Green concrete	●		
Aerated concrete	●		

Advantages: An ideal match with all types of abrasive materials - Outstanding grinding performance combined with a long service life - Fast and smooth grinding of surfaces thanks to double-row segments - Extended service life thanks to optimized matrix and diamonds - Simple dust extraction through openings in the steel enclosure - M14 adapter available, see DZ 114

Diameter x Bore in mm	Cup grinding wheel height in mm	Max. operating speed	Max. RPM	Segment in mm Number / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	20	80 m/s	15300 rpm	14 / 8,2 / 5,5	1	331026
115 x 22,23	20	80 m/s	13300 rpm	14 / 8,2 / 5,5	1	331027
125 x 22,23	24,5	80 m/s	12200 rpm	18 / 7,2 / 5	1	331028
180 x 22,23	30,5	80 m/s	8500 rpm	22 / 7,8 / 5,3	1	331029

Diamond cup grinding wheels for angle grinders



Diamond cup grinding wheel

DS 650 PKD SUPRA



Properties

Design	Brazed
Aggression	■■■■■□
Service life	■■■■■□



Applications:

Epoxy resin	●	Bitumen	●
Adhesive	●	Paint	●
Coatings	●	Glue	●
Filler	●		

NEW !

Advantages: PCD (Poly Crystalline Diamonds) cup grinding wheel with good stock removal on hard resins and adhesive residues - Good dust removal - Aggressive grinding performance - Support segments for a smooth and low-vibration grinding process - M14 adapter available, see DZ 114

Diameter x Bore in mm	Cup grinding wheel height in mm	Max. operating speed	Max. RPM	Segment in mm Number / Width / Height	Packing unit/pcs.	Cat. number
125 x 22,23	21,6	80 m/s	12200 rpm	6 / 13 / 3,6	1	355953
180 x 22,23	29	80 m/s	8500 rpm	6 / 13 / 4	1	355940

Diamond cup grinding wheel

DS 900 PKD SPECIAL



Properties

Design	Brazed
Aggression	■■■■■
Service life	■■■■■



Applications:

Adhesive	●	Bitumen	●
Epoxy resin	●	Paint	●
Filler	●	Glue	●
Coatings	●		

NEW !

Advantages: Ultra-aggressive polycrystalline diamond cutting wedges enable the cup grinding wheel to remove hard and solid coatings - Support segments for a smooth and low-vibration grinding process - M14 adapter available, see DZ 114

Diameter x Bore in mm	Cup grinding wheel height in mm	Max. operating speed	Max. RPM	Segment in mm Number / Width / Height	Packing unit/pcs.	Cat. number
125 x 22,23	21	80 m/s	12200 rpm	6 / 5 / 3,5	1	355941
180 x 22,23	21,5	80 m/s	8500 rpm	8 / 5 / 3,5	1	355948

Adapter M14

DZ 114




Advantages: For retooling diamond cup grinding wheels with a Ø 22.23 mm hole to an M14 spindle size - Suitable for all Klingspor diamond cup grinding wheels

Mounting	Packing unit/pcs.	Cat. number
thread M14	1	331332

Diamond cutting blade

DT 300 U EXTRA



Properties

Design	Sintered
Segmentation	Standard
Aggression	■ ■ ■ ■ □ □ □ □
Service life	■ ■ ■ ■ □ □ □ □



Applications:


Construction materials	●
------------------------	---

Advantages: Product for universal use on general construction materials - Excellent cutting performance - Great price-performance ratio

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	17 / 50,1 / 2,8 / 7	1	326831
300 x 25,4	100 m/s	6400 rpm	17 / 50,1 / 2,8 / 7	1	325349
300 x 30	100 m/s	6400 rpm	17 / 50,1 / 2,8 / 7	1	325351
350 x 25,4	100 m/s	5500 rpm	20 / 50,1 / 2,8 / 7	1	325350
350 x 30	100 m/s	5500 rpm	20 / 50,1 / 2,8 / 7	1	325352

Diamond cutting blade

DT 310 UT EXTRA



Properties

Design	Sintered
Segmentation	Turbo continuous rim
Aggression	■ ■ ■ ■ □ □ □ □
Service life	■ ■ ■ ■ □ □ □ □



Applications:

Construction materials	●
Concrete, universal	●

Advantages: All-purpose - Excellent cutting performance, great price-performance ratio - Continuous rim with turbo segments for clean and nick-free edges

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	CR / CR / 3 / 10	1	334092
300 x 25,4	100 m/s	6400 rpm	CR / CR / 3 / 10	1	339121
350 x 20	100 m/s	5500 rpm	CR / CR / 3 / 10	1	334093
350 x 25,4	100 m/s	5500 rpm	CR / CR / 3 / 10	1	339123

Diamond cutting blades for petrol powered cutters, table saws and joint cutters

Diamond cutting blade

DT 350 U EXTRA



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □

Applications:

Construction materials	●
Concrete, universal	●

Advantages: Product with laser-welded standard segments for universal use on general construction materials - Smooth, fast and low-vibration cutting with unmatched service life - Optimum price-performance ratio

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	21 / 40 / 2,8 / 10	1	336223
300 x 25,4	100 m/s	6400 rpm	21 / 40 / 2,8 / 10	1	336220
350 x 20	100 m/s	5500 rpm	24 / 40 / 3 / 10	1	336224
350 x 25,4	100 m/s	5500 rpm	24 / 40 / 3 / 10	1	336221
400 x 25,4	100 m/s	4800 rpm	28 / 40 / 3,6 / 10	1	347486

Diamond cutting blade

DT 600 U SUPRA



Properties

Design	Laser welded
Segmentation	Short segments
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □

Applications:

Construction materials	●
Concrete, universal	●
Cured concrete, reinforced	●
Chalky sandstone	●

Advantages: High cutting performance - Long service life thanks to the use of premium-grade raw materials and diamonds - Clean cutting edges - Effortless cutting thanks to short serrated segments

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	32 / 24 / 2,8 / 10	1	325183
300 x 25,4	100 m/s	6400 rpm	32 / 24 / 2,8 / 10	1	325184
300 x 30	100 m/s	6400 rpm	32 / 24 / 2,8 / 10	1	325185
350 x 20	100 m/s	5500 rpm	37 / 24 / 3 / 10	1	325194
350 x 25,4	100 m/s	5500 rpm	37 / 24 / 3 / 10	1	325195
350 x 30	100 m/s	5500 rpm	37 / 24 / 3 / 10	1	325196
400 x 20	100 m/s	4800 rpm	43 / 24 / 3,6 / 10	1	347484
400 x 25,4	100 m/s	4800 rpm	43 / 24 / 3,6 / 10	1	347485
400 x 30	100 m/s	4800 rpm	43 / 24 / 3,6 / 10	1	347527



Diamond cutting blades for petrol powered cutters, table saws and joint cutters



►► Continuation of DT 600 U SUPRA, Diamond cutting blade

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
450 x 25,4	100 m/s	4300 rpm	48 / 24 / 3,6 / 10	1	325201
450 x 30	100 m/s	4300 rpm	48 / 24 / 3,6 / 10	1	325200
500 x 25,4	100 m/s	3900 rpm	54 / 24 / 3,6 / 10	1	325203
500 x 30	100 m/s	3900 rpm	54 / 24 / 3,6 / 10	1	325202

Diamond cutting blade

DT 612 UT SUPRA



Properties

Design	Laser welded
Segmentation	Turbo
Aggression	■■■■■□
Service life	■■■■■□

Applications:

Concrete, universal	●
Cured concrete, reinforced	●
Construction materials	●


Advantages: Special turbo segments for an extremely high cutting speed on almost all hard materials - Excellent service life even on reinforced concrete

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	20 / 40 / 2,8 / 12	1	340224
300 x 25,4	100 m/s	6400 rpm	20 / 40 / 2,8 / 12	1	340229
350 x 20	100 m/s	5500 rpm	22 / 40 / 3 / 12	1	340227
350 x 25,4	100 m/s	5500 rpm	22 / 40 / 3 / 12	1	340230
400 x 20	100 m/s	4800 rpm	26 / 40 / 3,6 / 12	1	347482
400 x 25,4	100 m/s	4800 rpm	26 / 40 / 3,6 / 12	1	347493

Diamond cutting blades for petrol powered cutters and table saws

Diamond cutting blade

DT 900 U SPECIAL



Properties

Design	Laser welded
Segmentation	Narrow/wide gullet
Aggression	■■■■■■■■
Service life	■■■■■■■■

Applications:

Construction materials	●	Granite	●
Concrete, universal	●		
Cured concrete, reinforced	●		
Chalky sandstone	●		

Advantages: Suitable for a wide range of applications - Ultra fast cutting speed - Special segment bond for long service life and clean cuts - Engineered for professional use

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	325053
300 x 25,4	100 m/s	6400 rpm		21 / 40 / 2,8 / 10	1	325067
300 x 30	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	325052
300 x 30	100 m/s	6400 rpm		21 / 40 / 2,8 / 10	1	325066
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3 / 10	1	325085
350 x 25,4	100 m/s	5500 rpm		24 / 40 / 3 / 10	1	325100
350 x 30	100 m/s	5500 rpm		21 / 40 / 3 / 10	1	325084
350 x 30	100 m/s	5500 rpm		24 / 40 / 3 / 10	1	325099
400 x 25,4	100 m/s	4800 rpm		28 / 40 / 3,6 / 10	1	349233
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349246
400 x 30	100 m/s	4800 rpm		28 / 40 / 3,6 / 10	1	349234
400 x 30	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349245
450 x 25,4	100 m/s	4300 rpm		26 / 40 / 3,6 / 10	1	325133
450 x 25,4	100 m/s	4300 rpm		32 / 40 / 3,6 / 10	1	325176
450 x 30	100 m/s	4300 rpm		26 / 40 / 3,6 / 10	1	325132
450 x 30	100 m/s	4300 rpm		32 / 40 / 3,6 / 10	1	325175
500 x 25,4	100 m/s	3900 rpm		36 / 40 / 3,7 / 10	1	325155
500 x 25,4	100 m/s	3900 rpm		30 / 40 / 3,7 / 10	1	325164
500 x 30	100 m/s	3900 rpm		36 / 40 / 3,7 / 10	1	325154
500 x 30	100 m/s	3900 rpm		30 / 40 / 3,7 / 10	1	325163
600 x 25,4	100 m/s	3200 rpm		36 / 40 / 3,7 / 10	1	345023

Diamond cutting blade

DT 900 US SPECIAL



Properties

Design	Laser welded
Segmentation	Narrow gullet
Aggression	■■■■■■■■
Service life	■■■■■■■■









Applications:

Cured concrete, reinforced	●
Concrete, universal	●
Construction materials	●
Chalky sandstone	●

Granite	●
---------	---

Advantages: All-purpose high-performance tool - Extremely high cutting speed - Special segment bond for long service life and clean cuts - Engineered for professional use - Ideally suited for low-noise work environments thanks to sandwich core

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 25,4	100 m/s	6400 rpm		21 / 40 / 2,8 / 10	1	334062
300 x 30	100 m/s	6400 rpm		21 / 40 / 2,8 / 10	1	336725
350 x 25,4	100 m/s	5500 rpm		24 / 40 / 3 / 10	1	334063
350 x 30	100 m/s	5500 rpm		24 / 40 / 3 / 10	1	336726
450 x 25,4	100 m/s	4300 rpm		32 / 40 / 3,6 / 10	1	334065
500 x 25,4	100 m/s	3900 rpm		36 / 40 / 3,7 / 10	1	334066

Diamond cutting blade

DT 300 F EXTRA



Properties

Design	Sintered
Segmentation	Continuous rim
Aggression	■■■■□□□□
Service life	■■■■□□□□



Applications:

Tiles	●
Stove tiles	●

Advantages: Standard tool for clean and nick-free edges - Good price-performance ratio - Reduction ring from 30 mm to 25,4 mm included

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
200 x 25,4 / 30	80 m/s	7600 rpm	CR / CR / 1,9 / 7	1	325454

Diamond cutting blades for table saws

Diamond cutting blade

DT 600 F SUPRA



Properties

Design	Sintered
Segmentation	Continuous rim
Aggression	■■■■■□□
Service life	■■■■■□□



Applications:

Stoneware	●
Stove tiles	●
Stove tiles, glazed	●

Advantages: Professional wheel for tiles and feldspar - Continuous rim for clean and nick-free edges - Reduction ring from 30 mm to 25,4 mm included

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
180 x 25,4 / 30	80 m/s	8500 rpm	CR / CR / 1,6 / 7	1	325455
200 x 25,4 / 30	80 m/s	7600 rpm	CR / CR / 1,9 / 7	1	325373
250 x 25,4 / 30	80 m/s	6100 rpm	CR / CR / 1,9 / 7	1	325374
300 x 25,4 / 30	100 m/s	6400 rpm	CR / CR / 2 / 7	1	325375
350 x 25,4 / 30	100 m/s	5500 rpm	CR / CR / 2 / 7	1	325376

Diamond cutting blade

DT 900 FL SPECIAL



Properties

Design	Sintered
Segmentation	Continuous rim, with laser-cut slots
Aggression	■■■■■□□
Service life	■■■■■□□



Applications:

Wall tiles	●	Marble	●
Floor tiles	●		
Porcelain	●		
Ceramics	●		

Advantages: High-precision tool for hard wall and floor tiles - Laser-cut slots for exceptionally smooth operation and perfectly cut edges - Reduction ring from 30 mm to 25,4 mm included

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
180 x 25,4 / 30	100 m/s	10650 rpm	CR / CR / 1,6 / 7	1	331045
200 x 25,4 / 30	100 m/s	9550 rpm	CR / CR / 1,6 / 7	1	331046
230 x 25,4 / 30	100 m/s	8350 rpm	CR / CR / 1,8 / 7	1	331048
250 x 25,4 / 30	100 m/s	7600 rpm	CR / CR / 2 / 7	1	331047
300 x 25,4 / 30	100 m/s	6400 rpm	CR / CR / 2,2 / 7	1	331049
350 x 25,4 / 30	100 m/s	5500 rpm	CR / CR / 2,2 / 7	1	331050

Diamond cutting blades for petrol powered cutters and joint cutters



Diamond cutting blade

DT 900 ACR SPECIAL



Properties

Design	Vacuum-brazed
Segmentation	Narrow gullet
Aggression	■■■■■■■■
Service life	■■■■■■■■



Applications:

Construction materials	●	Plastic	●
Concrete, universal	●	Rubber	●
Glass	●		
Wood-based materials	●		


NEW !

Advantages: Vacuum-brazed diamond cutting blade for almost all materials - Very wide range of applications due to special manufacturing process - 10 mm high diamond coating for a good service life and an aggressive cut for very different and demanding materials - Ideal for rescue services

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	16 / 57 / 3,1 / 6	1	355726
300 x 25,4	100 m/s	6400 rpm	16 / 57 / 3,1 / 6	1	355727
350 x 20	100 m/s	5500 rpm	20 / 53 / 3,4 / 6	1	355729
350 x 25,4	100 m/s	5500 rpm	20 / 53 / 3,4 / 6	1	355728

Diamond cutting blade

DT 350 A EXTRA



Properties

Design	Laser welded
Segmentation	Wide gullet
Aggression	■■■■□□□□
Service life	■■■□□□□□



Applications:

Asphalt	●
Sandstone	●


Advantages: Diamond cutting blade for general repairs with an outstanding price-performance ratio - Specially engineered for applications on asphalt - Inclined protective segments prevent the premature wearing of the welds which can lead to segment loss on standard blades

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	337731
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	337729
350 x 20	100 m/s	5500 rpm		21 / 40 / 3,2 / 10	1	337732
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3,2 / 10	1	337730
400 x 20	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349236
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349237
450 x 25,4	100 m/s	4300 rpm		28 / 40 / 3,7 / 10	1	337734
500 x 25,4	100 m/s	3900 rpm		30 / 40 / 3,7 / 10	1	337735

Diamond cutting blades for petrol powered cutters and joint cutters

Diamond cutting blade

DT 602 A SUPRA



Properties

Design	Laser welded
Segmentation	Wide gullet
Aggression	■■■■■□□
Service life	■■■■■□□

Applications:


Asphalt	●
Sandstone	●

Advantages: First-rate cutting performance - Protective segments to guard the blade - Great price-performance ratio - Specially engineered for applications on asphalt - Also suitable for use on electric joint cutters

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	327025
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	325060
350 x 20	100 m/s	5500 rpm		21 / 40 / 3,2 / 10	1	327026
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3,2 / 10	1	325092
400 x 20	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349228
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349240
450 x 25,4	100 m/s	4300 rpm		28 / 40 / 3,7 / 10	1	325128
500 x 25,4	100 m/s	3900 rpm		30 / 40 / 3,7 / 10	1	325171

Diamond cutting blade

DT 612 A SUPRA



Properties

Design	Laser welded
Segmentation	Wide gullet
Aggression	■■■■■■■□
Service life	■■■■■■■□

Applications:

Asphalt	●
Sandstone	●

Advantages: High cutting speed combined with excellent service life - Protective segments to shield the core - Specially designed for applications on asphalt - Also suitable for use on electric joint cutters

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	330075
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3,2 / 10	1	330076
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349227
450 x 25,4	100 m/s	4300 rpm		28 / 40 / 3,7 / 10	1	330078
500 x 25,4	100 m/s	3900 rpm		30 / 40 / 3,7 / 10	1	330079

Diamond cutting blade

DT 902 A SPECIAL








Properties

Design	Laser welded
Segmentation	Wide gullet
Aggression	■■■■■■■
Service life	■■■■■■■□

Applications:

Asphalt	●
Sandstone	●
Green concrete	●
Screed	●

Advantages: Very high cutting performance - 12 mm high segments - Protective segments to guard the blade

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 12	1	325062
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3,2 / 12	1	325094
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 12	1	349239
450 x 25,4	100 m/s	4300 rpm		28 / 40 / 3,7 / 12	1	325130
500 x 25,4	100 m/s	3900 rpm		30 / 40 / 3,7 / 12	1	325173

Diamond cutting blade

DT 910 A SPECIAL








Properties

Design	Laser welded
Segmentation	Narrow gullet
Aggression	■■■■■■■□
Service life	■■■■■■■

Applications:

Asphalt	●
Sandstone	●
Green concrete	●
Screed	●


Advantages: Good cutting performance - 12 mm high segments - Protective segments to guard the blade - Exceptional service life

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 25,4	100 m/s	6400 rpm		21 / 40 / 2,8 / 12	1	325077
350 x 25,4	100 m/s	5500 rpm		24 / 40 / 3,2 / 12	1	325110
400 x 25,4	100 m/s	4800 rpm		28 / 40 / 3,6 / 12	1	349229
450 x 25,4	100 m/s	4300 rpm		30 / 40 / 3,7 / 12	1	325161
500 x 25,4	100 m/s	3900 rpm		35 / 40 / 3,7 / 12	1	325189

Diamond cutting blades for petrol powered cutters and joint cutters

Diamond cutting blade

DT 350 AB EXTRA



Properties

Design	Laser welded
Segmentation	Wide gullet
Aggression	■ ■ ■ ■ □ □ □ □
Service life	■ ■ ■ □ □ □ □ □

Applications:


Asphalt	●
Concrete	●

Advantages: Multi-purpose product for all repairs on asphalt and concrete thanks to laser-welded block segments, turbo segments and slanted protective segments - Can be used on gasoline-powered cutters and joint cutters with up to 10 kW

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmen- tation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm		18 / 40 / 2,8 / 12	1	340232
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 12	1	340241
350 x 20	100 m/s	5500 rpm		21 / 40 / 3,2 / 12	1	340236
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3,2 / 12	1	340240
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 12	1	349235

Diamond cutting blade

DT 612 AB SUPRA



Properties

Design	Laser welded
Segmentation	Wide gullet
Aggression	■ ■ ■ ■ ■ □ □ □
Service life	■ ■ ■ ■ ■ □ □ □

Applications:

Asphalt	●
Concrete	●

Advantages: Suitable for asphalt and concrete - Specially engineered for use on both materials - High cutting speed - Excellent service life


Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmen- tation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	332344
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 10	1	330080
350 x 20	100 m/s	5500 rpm		21 / 40 / 3,2 / 10	1	332345
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3,2 / 10	1	330081
400 x 20	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349225
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 10	1	349226
450 x 25,4	100 m/s	4300 rpm		28 / 40 / 3,7 / 10	1	330083
500 x 25,4	100 m/s	3900 rpm		30 / 40 / 3,7 / 10	1	330084

Diamond cutting blades for petrol powered cutters, table saws and joint cutters



Diamond cutting blade

DT 910 BF SPECIAL



Properties

Design	Laser welded
Segmentation	with protective segments
Aggression	■■■■■□
Service life	■■■■■□

Applications:

Green concrete	●
----------------	---

Advantages: Smooth and easy cutting performance - 12 mm tall segments - Protective segments shield the core - Unsurpassed service life thanks to a high concentration of premium-grade diamonds - Exceptionally well suited for fresh concrete

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 25,4	100 m/s	6400 rpm		21 / 40 / 2,8 / 12	1	330085
350 x 25,4	100 m/s	5500 rpm		24 / 40 / 3,2 / 12	1	330086
400 x 25,4	100 m/s	4800 rpm		28 / 40 / 3,6 / 12	1	349224
450 x 25,4	100 m/s	4300 rpm		30 / 40 / 3,7 / 12	1	330088
500 x 25,4	100 m/s	3900 rpm		35 / 40 / 3,7 / 12	1	330089

Diamond cutting blade

DT 350 B EXTRA



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■■■■■□
Service life	■■■■■□

Applications:

Concrete	●
Cured concrete, reinforced	⦿


Advantages: Diamond cutting disc with good price-performance ratio for working on concrete and construction materials - Fast cutting with low vibration - Optimum service life

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	21 / 40 / 2,8 / 10	1	352749
350 x 20	100 m/s	5500 rpm	24 / 40 / 3 / 10	1	354663
350 x 25,4	100 m/s	5500 rpm	24 / 40 / 3 / 10	1	339830
400 x 25,4	100 m/s	4800 rpm	28 / 40 / 3,6 / 10	1	351133

Diamond cutting blades for petrol powered cutters, table saws and joint cutters

Diamond cutting blade

DT 350 BT EXTRA



Properties

Design	Laser welded
Segmentation	Turbo
Aggression	■■■■■□
Service life	■■■■■□□



Applications:

Concrete	●
Cured concrete, reinforced	●

NEW !

Advantages: Special turbo segments for an extremely high cutting speed on concrete and all concrete products - Fast and easy cutting with low vibration - Optimum service life - Optimum price-performance ratio

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	21 / 40 / 2,8 / 10	1	354795
300 x 25,4	100 m/s	6400 rpm	21 / 40 / 2,8 / 10	1	354796
350 x 20	100 m/s	5500 rpm	24 / 40 / 3 / 10	1	354797
350 x 25,4	100 m/s	5500 rpm	24 / 40 / 3 / 10	1	354798
400 x 25,4	100 m/s	4800 rpm	28 / 40 / 3,6 / 10	1	354799

Diamond cutting blade

DT 602 B SUPRA



Properties

Design	Laser welded
Segmentation	Wide gullet
Aggression	■■■■■□□
Service life	■■■■■□□□



Applications:

Cured concrete	●
Cured concrete, reinforced	●

Advantages: First-rate cutting performance - Fast cutting speed - Particularly well suited for concrete with medium reinforcement - Also suitable for use on electric joint cutters

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 9	1	325056
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3,2 / 9	1	325088
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 9	1	349242
450 x 25,4	100 m/s	4300 rpm		26 / 40 / 3,7 / 9	1	325136
500 x 25,4	100 m/s	3900 rpm		30 / 40 / 3,7 / 9	1	325167

Diamond cutting blades for petrol powered cutters and joint cutters



Diamond cutting blade

DT 900 B SPECIAL



Properties

Design	Laser welded
Segmentation	Turbo
Aggression	■■■■■■■
Service life	■■■■■■■



Applications:

Cured concrete, reinforced	●
Concrete, universal	●
Construction materials	●
Chalky sandstone	●

Advantages: High performance blade with ultra high cutting speed thanks to turbo segments - Specially engineered for effortless cutting through concrete - Further increased service life thanks to titanium-coated diamonds

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 20	100 m/s	6400 rpm	20 / 40 / 2,8 / 12	1	325078
300 x 25,4	100 m/s	6400 rpm	20 / 40 / 2,8 / 12	1	325079
350 x 20	100 m/s	5500 rpm	22 / 40 / 3 / 12	1	325080
350 x 25,4	100 m/s	5500 rpm	22 / 40 / 3 / 12	1	325081
400 x 20	100 m/s	4800 rpm	26 / 40 / 3,6 / 12	1	347489
400 x 25,4	100 m/s	4800 rpm	26 / 40 / 3,6 / 12	1	347490

Diamond cutting blade

DT 902 B SPECIAL



Properties

Design	Laser welded
Segmentation	Wide gullet
Aggression	■■■■■■■
Service life	■■■■■■■□



Applications:

Cured concrete	●
Cured concrete, reinforced	●

Advantages: First-rate cutting performance - Ultra fast cutting speed - Also suitable for concrete with strong reinforcement

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 25,4	100 m/s	6400 rpm		18 / 40 / 2,8 / 11	1	325058
350 x 25,4	100 m/s	5500 rpm		21 / 40 / 3,2 / 11	1	325090
400 x 25,4	100 m/s	4800 rpm		24 / 40 / 3,6 / 11	1	349241
450 x 25,4	100 m/s	4300 rpm		26 / 40 / 3,7 / 11	1	325138
500 x 25,4	100 m/s	3900 rpm		30 / 40 / 3,7 / 11	1	325169

Diamond cutting blades for joint cutters / Reduction rings

Diamond cutting blade

DT 910 B SPECIAL



Properties

Design	Laser welded
Segmentation	Narrow gullet
Aggression	■■■■■■■□
Service life	■■■■■■■■■

Applications:

Cured concrete	●
Cured concrete, reinforced	●

Advantages: First-rate cutting performance - High cutting speed - Exceptional service life - Also suitable for concrete with strong reinforcement

Diameter x Bore in mm	Max. operating speed	Max. RPM	Segmentation	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
300 x 25,4	100 m/s	6400 rpm		21 / 40 / 2,8 / 11	1	325073
350 x 25,4	100 m/s	5500 rpm		24 / 40 / 3,2 / 11	1	325106
400 x 25,4	100 m/s	4800 rpm		28 / 40 / 3,6 / 11	1	349230
450 x 25,4	100 m/s	4300 rpm		32 / 40 / 3,7 / 11	1	325182
500 x 25,4	100 m/s	3900 rpm		36 / 40 / 3,7 / 11	1	325193

Reduction rings

DZ 100 RR



Advantages: Reduction rings with serration for enhanced adhesion

Diameter x Width x Bore in mm	Suitable for	Packing unit/pcs.	Cat. number
22,23 x 1,2 x 15,88	Bore 22,23 mm	1	337148
22,23 x 1,2 x 20	Bore 22,23 mm	1	337282
25,4 x 2 x 20	DT 300 U (325350)	1	328933
25,4 x 2,5 x 20	DT 602 A + DT 600 U	1	328934
25,4 x 9 x 20	DT 350 A + DT 350 U + DT 602 A	1	339133
25,4 x 2 x 22,23	Bore 25,4 mm	1	353265
30 x 2 x 25,4	Bore 30,00 mm	1	337344
30 x 2,5 x 25,4	Bore 30,00 mm	1	353266
30 x 2,5 x 20	Bore 30,00 mm	1	353267
30 x 2 x 22,23	Bore 30,00 mm	1	353268
30 x 2 x 20	Bore 30,00 mm	1	353269

R 1/2" BSP Male drill bit

DK 612 B

SUPRA



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■ ■ ■ ■ ■ ■ □
Service life	■ ■ ■ ■ ■ ■ □



Applications:

Concrete, universal	●
---------------------	---

Advantages: Drill bits for universal applications - High cutting speed and service life - Can be used on electric drilling machines - For replacement segments, see DE 600 B

Diameter in mm	Thread/Shaft	Effective length in mm	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
52	thread 1/2"	300	5 / 24 / 2,5 / 10	1	325720
56	thread 1/2"	300	5 / 24 / 2,5 / 10	1	325721
61	thread 1/2"	300	5 / 24 / 2,5 / 10	1	325722
71	thread 1/2"	300	7 / 24 / 2,5 / 10	1	325724
81	thread 1/2"	300	8 / 24 / 2,5 / 10	1	325755
91	thread 1/2"	300	9 / 24 / 2,5 / 10	1	325756
101	thread 1/2"	300	9 / 24 / 2,5 / 10	1	325757
111	thread 1/2"	300	10 / 24 / 2,5 / 10	1	325758
121	thread 1/2"	300	10 / 24 / 2,5 / 10	1	325759
130	thread 1/2"	300	10 / 24 / 2,5 / 10	1	325761
140	thread 1/2"	300	11 / 24 / 2,5 / 10	1	325762
150	thread 1/2"	300	12 / 24 / 2,5 / 10	1	325763
160	thread 1/2"	300	12 / 24 / 2,5 / 10	1	325764
170	thread 1/2"	300	12 / 24 / 2,5 / 10	1	325765
180	thread 1/2"	300	13 / 24 / 2,5 / 10	1	325766
200	thread 1/2"	300	15 / 24 / 2,5 / 10	1	325768

Drill bits with 1 1/4" UNC connection

1 1/4" UNC Female drill bit

DK 654 B SUPRA



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■■■■■■■□
Service life	■■■■■■■□



Applications:

Concrete, universal	●
---------------------	---

Advantages: Drill bits for universal applications - Very fast cutting - Long service life - Roof-shaped segments - Can be used on electric and hydraulic machines - For replacement segments, see DE 600 B

Diameter in mm	Thread/Shaft	Effective length in mm	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
52	thread 1 1/4"	450	5 / 24 / 3,5 / 11	1	325769
56	thread 1 1/4"	450	5 / 24 / 3,5 / 11	1	325770
61	thread 1 1/4"	450	5 / 24 / 3,5 / 11	1	325771
62	thread 1 1/4"	450	5 / 24 / 3,5 / 11	1	325772
66	thread 1 1/4"	450	5 / 24 / 3,5 / 11	1	325773
72	thread 1 1/4"	450	6 / 24 / 3,5 / 11	1	325774
82	thread 1 1/4"	450	7 / 24 / 3,5 / 11	1	325775
92	thread 1 1/4"	450	8 / 24 / 3,5 / 11	1	325776
102	thread 1 1/4"	450	9 / 24 / 3,5 / 11	1	325777
112	thread 1 1/4"	450	10 / 24 / 3,5 / 11	1	325778
122	thread 1 1/4"	450	10 / 24 / 4 / 11	1	325779
132	thread 1 1/4"	450	10 / 24 / 4 / 11	1	325781
142	thread 1 1/4"	450	11 / 24 / 4 / 11	1	325782
152	thread 1 1/4"	450	12 / 24 / 4 / 11	1	325783
162	thread 1 1/4"	450	13 / 24 / 4 / 11	1	325784
172	thread 1 1/4"	450	13 / 24 / 4 / 11	1	325785
182	thread 1 1/4"	450	14 / 24 / 4 / 11	1	325786
202	thread 1 1/4"	450	15 / 24 / 4,5 / 11	1	325787
225	thread 1 1/4"	450	16 / 24 / 4,5 / 11	1	325788
250	thread 1 1/4"	450	17 / 24 / 4,5 / 11	1	325789
300	thread 1 1/4"	450	22 / 20 / 5 / 11	1	325790

Drill bits with ring segments, R 1/2" connection



R 1/2" BSP Male drill bit

DR 912 B
SPECIAL



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■ ■ ■ ■ ■ ■ ■ ■
Service life	■ ■ ■ ■ ■ ■ ■ ■



Applications:

Concrete, universal	●
---------------------	---

Advantages: Fast cutting - Long service life on reinforced concrete - Suitable for drill stand or handheld drilling

Diameter in mm	Thread/Shaft	Effective length in mm	Segment in mm Number / Width / Height	Packing unit/pcs.	Cat. number
8	thread 1/2"	300	1 / 2 / 10	1	325791
10	thread 1/2"	300	1 / 2 / 10	1	325792
12	thread 1/2"	300	1 / 2 / 10	1	325793
14	thread 1/2"	300	1 / 2 / 10	1	325794
15	thread 1/2"	300	1 / 2,5 / 10	1	325795
16	thread 1/2"	300	1 / 2,5 / 10	1	325796
18	thread 1/2"	300	1 / 2,5 / 10	1	325797
20	thread 1/2"	300	1 / 2,5 / 10	1	325798
22	thread 1/2"	300	1 / 2,5 / 10	1	325799
24	thread 1/2"	300	1 / 2,5 / 10	1	325800
25	thread 1/2"	300	1 / 2,5 / 10	1	325801
26	thread 1/2"	300	1 / 2,5 / 10	1	325802
28	thread 1/2"	300	1 / 2,5 / 10	1	325803
30	thread 1/2"	300	1 / 2,5 / 10	1	325804
32	thread 1/2"	300	1 / 2,5 / 10	1	325805
35	thread 1/2"	300	1 / 3 / 10	1	325806
40	thread 1/2"	300	1 / 3 / 10	1	325807
42	thread 1/2"	300	1 / 3,5 / 10	1	325808
52	thread 1/2"	300	1 / 3,5 / 10	1	325811

Drill bit segments for DK 654 and DK 612

Ring segments for drill bits DR 912 B

Individual segment

DE 600 B

SUPRA



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■■■■■■■□
Service life	■■■■■■■□



Applications:

Concrete, universal	●
---------------------	---

Advantages: Single, roof-shaped segments for a fast first cut - Replacement segments for DK 612 B and DK 654 drill bits

Segment length in mm	Suitable for	Segment in mm Length / Width / Height / Radius	Packing unit/pcs.	Cat. number
20	Ø >272	20 / 5 / 11 / G	30	325839
24	Ø 56-62	24 / 3,5 / 11 / 30	30	325833
24	Ø 72-87	24 / 3,5 / 11 / 40	30	325834
24	Ø 92-112	24 / 3,5 / 11 / 50	30	325835
24	Ø 107-142	24 / 4 / 11 / 60	30	325836
24	Ø 142-182	24 / 4 / 11 / 80	30	325837
24	Ø 182-272	24 / 4 / 11 / 100	30	325838

Ring segment

DO 900 B

SPECIAL



Properties

Design	Laser welded
Segmentation	Standard
Aggression	■■■■■■■
Service life	■■■■■■■



Applications:

Concrete, universal	●
---------------------	---

Advantages: Replacement ring segment for DR 912 B drill bit

Diameter in mm	Segment in mm Width / Height	Packing unit/pcs.	Cat. number
8	2 / 10	10	325812
10	2 / 10	10	325813
12	2 / 10	10	325814
14	2 / 10	10	325815
15	2,5 / 10	10	325816
16	2,5 / 10	10	325817
18	2,5 / 10	10	325818
20	2,5 / 10	5	325819
22	2,5 / 10	5	325820
24	2,5 / 10	5	325821



Core cutter and adapter kit



►► Continuation of DO 900 B Special, Ring segment

Diameter in mm	Segment in mm Width / Height	Packing unit/pcs.	Cat. number
25	2,5 / 10	5	325822
26	2,5 / 10	5	325823
28	2,5 / 10	5	325824
30	2,5 / 10	3	325825
32	2,5 / 10	3	325826
35	3 / 10	3	325827
40	3 / 10	3	325828
42	3,5 / 10	3	325829
52	3,5 / 10	3	325832

Core cutter for switch boxes

DD 600 U SUPRA



Properties

Design	Laser welded
Edge	Segmented
Aggression	■■■■■□□□
Service life	■■■■■□□



Applications:

Masonry	●
Construction materials	●
Chalky sandstone	●

Advantages: For machining soft and medium-hard materials such as brick, clinker and firebrick - Hexagon mounting with center drill bit are separately available (see ADS200)

Diameter in mm	Thread/Shaft	Effective length in mm	Segment in mm Number / Length / Width / Height	Packing unit/pcs.	Cat. number
68	thread M16	70	3 / 24 / 3,5 / 7	1	325390
82	thread M16	70	4 / 24 / 3,5 / 7	1	325391

Adapter kit

ADS 200



Advantages: SDS / hexagon adapter with 8 mm centre bit for article DD 600 U

Size in mm	Thread/Shaft	Suitable for	Packing unit/pcs.	Cat. number
115	SDS holding device	DD 600 U	1	236588
115	hexagonal	DD 600 U	1	236442

Diamond drill for stoneware

Diamond drill

DB 600 F SUPRA



Properties

Design	Vacuum-brazed
Edge	Closed
Aggression	■■■■■□□
Service life	■■■■■□□



Applications:

Stoneware	●
Stove tiles	●
Stove tiles, glazed	●

Advantages: Dry cutting drill bit for drilling with pinpoint accuracy on hard materials such as fine stoneware, granite floor tiles and stove tiles - Clean edges - Precise holes - No bursting, cracking, or splintering - Integrated cooling wax - No water required - Excellent price-performance ratio

Diameter in mm	Thread/Shaft	Max. RPM	Effective length in mm	Segment in mm Number / Height	Packing unit/pcs.	Cat. number
6	1/4" bit, hexagonal	3000 rpm	32	1 / 10	1	325382
8	1/4" bit, hexagonal	3000 rpm	40	1 / 10	1	325527
10	1/4" bit, hexagonal	3000 rpm	40	1 / 10	1	325383
12	1/4" bit, hexagonal	3000 rpm	40	1 / 10	1	325384
14	1/4" bit, hexagonal	3000 rpm	40	1 / 10	1	325528

Diamond drill set

DB 600 F SUPRA Set



Properties

Design	Vacuum-brazed
Edge	Closed
Aggression	■■■■■□□
Service life	■■■■■□□



Applications:

Stoneware	●
Stove tiles	●
Stove tiles, glazed	●

Properties: 7 piece diamond drill set in a Klingspor case

Contents: 2x Ø 6 mm (325382), 1x Ø 8 mm (325527), 1x Ø 10 mm (325383), 1x Ø 12 mm (325384), 1x Ø 14 mm (325528), 1x hole starting aid (313807)

Advantages: Diamond drill bits and stainless steel centring aids in a convenient and sturdy aluminium case

Size in mm	Max. RPM	Packing unit/pcs.	Cat. number
200 x 140 x 55	3000 rpm	1	331021

Dry drill bit

DK 600 F SUPRA



Properties

Design	Vacuum-brazed
Edge	Closed



Applications:

Stoneware	●
Tiles	●
Stove tiles	●

Advantages: Dry drill bit for all standard angle grinders - Suitable for the hardest of tiles, masonry and stoneware - Freehand centering - Precise and accurate drilling - Clean edges, precise holes - No splitting, cracking or chipping - No water needed

Diameter in mm	Thread/Shaft	Max. RPM	Effective length in mm	Segment in mm Number / Height	Packing unit/pcs.	Cat. number
6	thread M14	13300 rpm	35	1 / 10	1	330670
8	thread M14	13300 rpm	35	1 / 10	1	330671
10	thread M14	13300 rpm	35	1 / 10	1	330672
12	thread M14	13300 rpm	35	1 / 10	1	330673
14	thread M14	13300 rpm	35	1 / 10	1	330674
20	thread M14	13300 rpm	45	1 / 15	1	330675
22	thread M14	13300 rpm	45	1 / 15	1	330676
25	thread M14	13300 rpm	45	1 / 15	1	330677
26	thread M14	13300 rpm	45	1 / 15	1	325385
30	thread M14	13300 rpm	45	1 / 15	1	330678
35	thread M14	13300 rpm	45	1 / 15	1	330679
38	thread M14	13300 rpm	45	1 / 15	1	325386
40	thread M14	13300 rpm	45	1 / 15	1	330680
45	thread M14	13300 rpm	45	1 / 15	1	330681
50	thread M14	13300 rpm	45	1 / 15	1	330682
58	thread M14	13300 rpm	45	1 / 15	1	325387
65	thread M14	13300 rpm	45	1 / 15	1	325388
68	thread M14	13300 rpm	45	1 / 15	1	330683
70	thread M14	13300 rpm	45	1 / 15	1	325389
82	thread M14	13300 rpm	50	1 / 15	1	330685
112	thread M14	13300 rpm	50	1 / 15	1	330684

Dry drill bit for stoneware / Accessory

Dry drill bit set

DK 600 F SUPRA Set



Properties

Design	Vacuum-brazed
Edge	Closed



Applications:

Stoneware	●
Tiles	●
Stove tiles	●

Properties: 6-piece dry drill bit set in a Klingspor case

Contents: 2x Ø 6 mm (330670), 2x Ø 8 mm (330671), 1x Ø 10 mm (330672), 1x Ø 12 mm (330673);

Advantages: Dry drill bits in a convenient and sturdy aluminium case

Size in mm	Max. RPM	Packing unit/pcs.	Cat. number
110 x 130 x 100	13300 rpm	1	331076

Hole starting aid

ABH 80



Advantages: Hole starting aid for professional diamond dry drill DB 600 F

Size in mm	Suitable for	Packing unit/pcs.	Cat. number
55	DB 600 F	1	313807



A large grid of small squares, resembling graph paper, intended for taking notes.



Flexible abrasives



About the product

R-Flex abrasives

Used for finishing and polishing all kinds of surfaces. Despite their elastic construction, R-Flex abrasives boast a long service life with high dimensional stability throughout their use.

Mounted points

Available in numerous sizes and grains. They are used for apparatus and container construction, in the aviation and automobile industries, as well as in the food and chemical sectors.



Mottling point fixing spindle with milled plane surface

The Sandflex hand block

Cleans, polishes and matt finishes a large variety of materials including metal, wood, paints, plastics, rubber and paper. In addition to its commercial applications, the Sandflex hand block is also excellent for car care and jobs around the house like cleaning iron soleplates, ski edges etc. Sandflex performs even better when used with water, soap, paraffin oil or pastes. With four different grain sizes to choose from, you will find the right product for all types of materials and jobs.

R-Flex wheels

Available with silicon carbide or corundum grit in different binding hardnesses and dimensions. Typical applications are deburring plastic parts, giving surgical instruments their final finish, sharpening knives, etc. R-Flex wheels are, due to their elastic attachment, easy to shape and adjust to the contours of the tool during grinding.

Mottling points

Create special surface effects with a uniform, extra fine finish. R-Flex mottling points are used with great success for surface treatment applications in tank and container construction (breweries, wine and champagne producers) and in plant construction for commercial kitchens. They are available with bonding agents E (specially designed for aluminium and NF metals) and the softer, more elastic bonding agents W and T (for stainless steel) – with the T bonding agent creating a glossier finish on stainless steel surfaces and offering suitability for universal use.

Klingspor mottling points are available with 2 shaft options

- a full length round shaft
- a shaft with a milled plain surface (see image above) for secure mounting

Please note the product descriptions provided on the following pages.

Description	Type	Material applications												Page
		Iron	Steel	Stainless steel	NF metals	Wood	Paint / Varnish	Glass / Stone	Plastic	Leather	Paper	Ceramic	Porcelain	
R-Flex	<i>RFS 651 bond E</i>			●	●									339
	<i>RFM 652 bond E</i>				●									339
	<i>RFR 654 bond Z/E</i>	●	●	●	●	○	○	○	●			○	○	341
Sandflex	<i>SFM 656 bond W</i>			●										340
	<i>SFM 656 bond T</i>			●										340
	<i>SFK 655 block</i>	●	●	●	●	●	●	●	●	●	●	●	●	340

● = main application ○ = possible application

Flexible abrasives

Applications guide

R-Flex points for cleaning and finishing and R-Flex wheels are ideally suited for fine machining surfaces thanks to their elastically embedded grit. Matching any type of possible application, Klingspor offers an extensive range of tools with a large variety of dimensions, grit sizes and three different kinds of bonding agents (hard, medium and soft). The chart below provides an overview of the available versions:



Example of a decorative finish created with an R-Flex mottling point SFM 656 on a stainless steel sheet

Dimensions R-Flex point RFS 651

Ø [mm]	Possible widths [mm]	Grit size	Minimum order quantities	Requested grit type / grit size
15	15, 20, 25, 30	60, 120, 240	10	from 450 pieces
20	15, 20, 25, 30	60, 120, 240	10	from 450 pieces
25	10, 15, 20, 25, 30	60, 120, 240	10	from 250 pieces
30	10, 15, 20, 25, 30	60, 120, 240	10	from 250 pieces
40	10, 15, 20, 30, 40	60, 120, 240	10	from 160 pieces
50	10, 20, 30, 40	60, 120, 240	10	from 110 pieces
60	30, 40	60, 120, 240	10	from 90 pieces

Dimensions R-Flex wheel RFR 654

Ø [mm]	Possible widths [mm]	Grit size	Minimum order quantities	Requested grit type / grit size
100	10, 15, 20, 25, 30, 35	60, 120, 240	1	from 15 pieces
125	10, 15, 20, 25, 30, 35	60, 120, 240	1	from 12 pieces
150	10, 15, 20, 25, 30, 35	60, 120, 240	1	from 6 pieces
175	15, 20, 25, 30, 35	60, 120, 240	1	from 6 pieces
200	15, 20, 25, 30, 35	60, 120, 240	1	from 6 pieces

Other grit sizes on request

Bonding types for RFS 651 mounted points used for cleaning and finishing as well as for R-Flex wheels RFR 654

Types of bonding	Grain	Hardness	Maximum operating speed
Z tough, hard wearing	Aluminium oxide	hard	up to 32 m/s
E non clogging, free cutting (ideal for aluminium)	SiC	medium	up to 16 m/s
W elastic, hard wearing, matt finish (ideal for stainless steel)	SiC	soft	up to 5 m/s

Bonding types for mottling points

Types of bonding	Grain	Hardness	Maximum operating speed
W elastic, hard wearing, matt finish (ideal for stainless steel)	SiC	soft	up to 5 m/s
T elastic, more free cutting, for a glossier finish (ideal for stainless steel)	SiC	soft	up to 5 m/s
E non clogging, free cutting (ideal for aluminium)	SiC	medium	up to 16 m/s



We reserve the right to over-deliver or under-deliver made to order items.

Flexible abrasives

Mounted points, mottling points



R-Flex mounted points

RFS 651



Properties

Bonding agent	Plastic
Grain	SiC

Applications:

Aluminium	●
Stainless steel	●
NF metals	●

Advantages: Versatile mounted points for cleaning and finishing - Soft abrasion due to elastic structure - Can be used until completely worn down

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Height x Shaft in mm	Grit	Bonding agent	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
40 x 15 x 6	60	E	16 m/s	7600 rpm	10	14006
40 x 15 x 6	120	E	16 m/s	7600 rpm	10	14007
40 x 15 x 6	240	E	16 m/s	7600 rpm	10	14008
50 x 10 x 6	240	E	16 m/s	6100 rpm	10	14012
60 x 30 x 6	60	E	16 m/s	5000 rpm	10	14030
60 x 30 x 6	120	E	16 m/s	5000 rpm	10	14031

R-Flex mottling points

RFM 652



Properties

Bonding agent	Plastic
Grain	SiC

Applications:

Aluminium	●
NF metals	●

Advantages: Produces a satin surface scratch pattern - Soft abrasion due to elastic structure - Can be used until completely worn down - Available in two executions: with full length round shaft (standard execution, stock items) or with flattened shaft for simple and secure clamping in tool holders with clamping screw (made to order items)

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Height x Shaft in mm	Grit	Bonding agent	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
30 x 30 x 6	60	E	8 m/s	5000 rpm	10	14033
30 x 30 x 6	120	E	8 m/s	5000 rpm	10	14034
40 x 30 x 6	120	E	8 m/s	3800 rpm	10	14036
50 x 30 x 6	60	E	8 m/s	3000 rpm	10	14037
50 x 30 x 6	120	E	8 m/s	3000 rpm	10	14038

Flexible abrasives

Mottling points / Hand block

Sandflex mottling points

SFM 656



Properties

Bonding agent Plastic

Grain SiC

Applications:

Stainless steel ●

Advantages: Produces a glossy finish on stainless steel surfaces - Soft abrasion due to elastic structure - Can be used until completely worn down - Available in two executions: with flattened shaft for simple and secure clamping (standard execution, stock items) and with full length round shaft (made to order items)

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Height x Shaft in mm	Grit	Bonding agent	Max. operating speed	Max. RPM	Packing unit/pcs.	Cat. number
30 x 30 x 6	60	W	5 m/s	3200 rpm	10	13856
30 x 30 x 6	120	W	5 m/s	3200 rpm	10	13857
40 x 30 x 6	60	W	5 m/s	2400 rpm	10	13859
40 x 30 x 6	120	W	5 m/s	2400 rpm	10	13860
50 x 30 x 6	60	T	5 m/s	1900 rpm	10	334993
50 x 30 x 6	60	W	5 m/s	1900 rpm	10	13862
50 x 30 x 6	120	W	5 m/s	1900 rpm	10	13863
60 x 30 x 6	60	T	5 m/s	1600 rpm	10	334995
60 x 30 x 6	60	W	5 m/s	1600 rpm	10	13865

Hand block

SFK 655



Properties

Bonding agent Plastic

Grain SiC

Applications:

Paint/Varnish ●

Glass/Stone ●

Wood ●

Plastic ●

Leather ●

Metals ●

Advantages: Universal hand block for cleaning and finishing - Can be used on many materials - Cleaning performance is significantly increased by use of additives - Soft abrasion due to elastic structure - Can be used until completely worn down

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length x Height in mm	Grit	Packing unit/pcs.	Cat. number
80 x 50 x 20	30	18	13800
80 x 50 x 20	60	18	13801
80 x 50 x 20	120	18	13802
80 x 50 x 20	240	18	13803



Flexible abrasives

Hand block / R-Flex wheel



►► Continuation of SFK 655 Hand block

Width x Length x Height in mm	Grit	Packing unit/pcs.	Cat. number
150 x 80 x 20	30	1	13804
150 x 80 x 20	60	1	13805
150 x 80 x 20	120	1	63231
150 x 80 x 20	240	1	13807

Hand block

SFK 655 Set



Properties

Bonding agent Plastic

Grain SiC

Applications:

Paint/Varnish ●

Glass/Stone ●

Wood ●

Plastic ●

Leather ●

Metals ●

Advantages: Universal hand block for cleaning and finishing - Can be used on many materials - Cleaning performance is significantly increased by use of additives - Soft abrasion due to elastic structure - Can be used until completely worn down

Contents: 18 pcs. / 6 pieces in grit 60, 120, 240 each

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length x Height in mm	Packing unit/pcs.	Cat. number
80 x 50 x 20	1	72129

R-flex wheel

RFR 654



Properties

Bonding agent Plastic

Grain Aluminium
oxide/SiC

Applications:

Stainless steel ●

Steel ●

NF metals ●

Aluminium ●

Plastic ●

Glass ○

Advantages: Versatile abrasive wheel - Deburring, matt finishing and finishing with one tool - Good adaptation to workpiece contour - Soft abrasion due to elastic structure - Can be used until completely worn down - Available in Aluminium oxide (bonding Z) and SiC (bonding E and W)

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------






All sizes and minimum purchasing quantities available on request



About the product

Klingspor carbide burrs are used wherever outstanding stock removal and service life are pivotal to the proper processing of hard-to-reach places. The burrs are manufactured according to the highest quality standards and with utmost precision. Our comprehensive product selection offers all shapes and dimensions

necessary to find the solution that matches each application best. Thanks to the abundance of available tooling options, you can be sure to achieve the desired outcome on any material and with unparalleled speed.

Type			Form	Page
HF 100 J	(KSJ)		Conical shape, pointed nose (60°)	352
HF 100 K	(KSK)		Conical shape, pointed nose (90°)	353
HF 100 L	(KEL)		Conical shape, round nose	353
HF 100 M	(SKM)		Conical shape, pointed nose	354
HF 100 N	(WKN)		Dovetail	354
Sets of burs				
HF 100		Set, 40 carbide burs		355
HF 100		Set, 5 carbide burs		355
HF 100 Steel		Set, 5 carbide burs		356
HF 100 INOX		Set, 5 carbide burs		356

● = main application ◐ = possible application

Carbide burrs

Applications guide

The cuts at a glance

2 Cuts

Standard cut / plain cut with good finishing properties for universal applications.



3 Cuts aluminium

High stock removal rate and reduced clogging of teeth for working on long-chipping and soft materials like NF metals and plastics.



6 Cuts mega seller

Double cut for universal applications, improved handling and low vibration. Creates a small chip.



New high performance tooth geometries for steel and INOX processing

Perfectly adapted to the respective group of processed material, the newly engineered blade geometries 10 (steel) and 11 (INOX) allow for a significantly higher stock removal rate when compared to the cross-cut toothing typically found on ordinary burrs.

The advantages at a glance:

- ▶ higher level of aggressiveness and cutting performance
- ▶ improved chip removal
- ▶ markedly enhanced service life thanks to reduced built-up edge formation
- ▶ less thermal stress on tool and workpiece
- ▶ decrease in annealing colours during INOX applications

10 cuts high performance tooth geometry - steel

Tooth geometry optimised for steel processing; significantly higher stock removal rate compared to a standard cross-cut tooth geometry



11 cuts high performance tooth geometry - INOX

Tooth geometry optimised for the processing of austenitic as well as corrosion and acid-resistant grades of stainless steel; strikingly improved stock removal performance by contrast with standard cross-cut tooth geometries



Additional cuts available on request

Important safety recommendations

- Please ensure that a maximum 30% of the tools circumference is in contact with the workpiece
- Extra long burrs with extended shank require slower operating speeds
- Ensure the burr is clamped correctly in a regularly maintained operating tool
- Run the selected burr at the correct operating speed to avoid risks and to ensure an optimum tool performance
- Please observe the safety recommendations on the packaging

Maximum operating speeds

Burr head in mm	Max. RPM
2/2,4/3	100,000
4/4,8/5/6/6,3	65,000
8/9,6/10/11	55,000
12/12,7	35,000
16	25,000
19,2	20,000
25,4	15,000


Recommended operating speeds

Burr head diameter in mm	Optimal speed range (RPM), depending on materials			
	The values in brackets are recommended starting speeds (start points) if no empirical values are already available			
	NF metals	Aluminium, plastic	Unhardened steels	Hardened steels, stainless steel
2/2,4/3	45,000	60,000	60,000	60,000
	(65,000)	(65,000)	(80,000)	(80,000)
	up to 80,000	up to 80,000	up to 80,000	up to 80,000
4/4,8/5/6/6,3	22,000	15,000	45,000	30,000
	(45,000)	(40,000)	(50,000)	(40,000)
	up to 60,000	up to 60,000	up to 60,000	up to 45,000
8/9,6/10/11	15,000	10,000	30,000	19,000
	(30,000)	(25,000)	(30,000)	(25,000)
	up to 40,000	up to 50,000	up to 40,000	up to 30,000
12/12,7	11,000	7,000	22,000	15,000
	(25,000)	(20,000)	(25,000)	(20,000)
	up to 30,000	up to 30,000	up to 30,000	up to 22,000
16	9,000	6,000	18,000	12,000
	(20,000)	(15,000)	(20,000)	(15,000)
	up to 20,000	up to 20,000	up to 20,000	up to 18,000
19,2	8,000	5,000	15,000	10,000
	(12,000)	(10,000)	(15,000)	(10,000)
	up to 17,000	up to 17,000	up to 17,000	up to 15,000
25,4	6,000	4,000	10,000	7,000
	(10,000)	(8,000)	(10,000)	(8,000)
	up to 13,000	up to 13,000	up to 13,000	up to 11,000

Carbide Burrs

Carbide burr

HF 100 A



Properties: Cylindrical burr without end-cut - Designation in accordance with DIN 8032: ZYA


Advantages: For universal use - Especially suitable for surface grinding



Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
3	14	38	3	6	5	295482
6	18	50	6	2	1	295521
9,6	19	64	6	3	1	295563
12,7	25	70	6	3	1	295604
6	18	50	6	6	1	295531
8	19	64	6	6	1	295552
9,6	19	64	6	6	1	295568
12,7	19	64	6	6	1	295594
12,7	25	70	6	6	1	295609
16	25	70	6	6	1	295621
6	18	50	6	10	1	334116
8	19	64	6	10	1	334118
9,6	19	64	6	10	1	334120
12,7	25	70	6	10	1	334122
6	18	50	6	11	1	334117
8	19	64	6	11	1	334119
9,6	19	64	6	11	1	334121
12,7	25	70	6	11	1	334123

Carbide burr

HF 100 B



Properties: Cylindrical burr with end cut - Designation in accordance with DIN 8032: ZYAS

Advantages: The end cut makes it suitable for blind holes and faces on inner contours




Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
3	14	38	3	6	5	295483
6,3	12,7	55	3	6	5	295507
6	18	50	6	2	1	295522
12,7	25	70	6	2	1	295603
6	18	50	6	3	1	295526
9,6	19	64	6	3	1	295564
12,7	25	70	6	3	1	295605
6	18	50	6	6	1	295532
8	19	64	6	6	1	295553
9,6	19	64	6	6	1	295569
12,7	19	64	6	6	1	295595
12,7	25	70	6	6	1	295610
16	25	70	6	6	1	295622
6	18	50	6	10	1	334124
8	19	64	6	10	1	334125
9,6	19	64	6	10	1	334131
12,7	25	70	6	10	1	334132

Carbide Burrs

Carbide burr

HF 100 C



Properties: Cylindrical burr with ball end - Designation in accordance with DIN 8032: WRC


Advantages: For universal use on surfaces, contours and radiuses



Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
3	14	38	3	2	5	295649
3	14	38	3	6	5	295654
6	18	50	6	2	1	295686
12,7	25	70	6	2	1	295747
6	18	50	6	3	1	295688
9,6	19	63	6	3	1	295725
12,7	25	70	6	3	1	295750
6	18	50	6	6	1	295694
8	19	63	6	6	1	295713
9,6	19	63	6	6	1	295727
12,7	19	64	6	6	1	295741
12,7	25	70	6	6	1	295753
16	25	70	6	6	1	295763
6	18	50	6	10	1	334133
8	19	64	6	10	1	334135
9,6	19	64	6	10	1	334137
12,7	25	70	6	10	1	334140
6	18	50	6	11	1	334134
8	19	64	6	11	1	334136
9,6	19	64	6	11	1	334138
12,7	25	70	6	11	1	334139

Carbide burr

HF 100 D



Properties: Ball-shaped burr - Designation in accordance with DIN 8032: KUD

Advantages: For use on contours - For deburring bore holes




Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
3	2,5	38	3	6	5	295784
9,6	8	54	6	3	1	300054
12,7	11	56	6	3	1	295857
6	4,7	50	6	6	1	295819
8	6	52	6	6	1	295831
9,6	8	54	6	6	1	295843
12,7	11	56	6	6	1	295859
16	14	60	6	6	1	295868
6	4,7	50	6	10	1	334141
8	6	52	6	10	1	334143
9,6	8	54	6	10	1	334146
12,7	11	56	6	10	1	334147
6	4,7	50	6	11	1	334142
9,6	8	54	6	11	1	334145
12,7	11	56	6	11	1	334148

Carbide Burrs

Carbide burr

HF 100 E



Properties: Drop-shaped burr - Designation in accordance with DIN 8032: TRE


Advantages: For milling out fillet welds - Suitable for working on moulded parts



Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
8	15	60	6	6	1	295909
9,6	16	60	6	6	1	295916
12,7	22	67	6	6	1	295925
12,7	22	67	6	11	1	334150

Carbide burr

HF 100 F



Properties: Semi-circular burr - Designation in accordance with DIN 8032: RBF

Advantages: Well suited for working on moulded parts



Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
3	14	38	3	2	5	295946
3	14	38	3	6	5	295951
9,6	19	64	6	3	1	295985
12,7	25	70	6	3	1	296007
6	18	50	6	6	1	295971
9,6	19	64	6	6	1	295987
8	20	65	6	6	1	295978
12,7	25	70	6	6	1	296010
16	25	70	6	6	1	296020
9,6	19	64	6	10	1	334155
8	20	65	6	10	1	334153



►► Continuation of HF 100 F, Carbide Burr

Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
12,7	25	70	6	10	1	334157
9,6	19	64	6	11	1	334156
8	20	65	6	11	1	334154
12,7	25	70	6	11	1	334158

Carbide burr

HF 100 G



Properties: Pointed arch-shaped burr with flattened tip - Designation in accordance with DIN 8032: SPG

Advantages: Ideal for chamfering - For deburring bore holes




Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
3	14	38	3	2	5	296043
3	14	38	3	6	5	296047
6,3	12,7	45	3	6	5	296055
6	18	50	6	6	1	296062
8	19	64	6	6	1	296066
9,6	19	64	6	6	1	296074
12,7	19	64	6	6	1	296079
12,7	25	70	6	6	1	296086
6	18	50	6	10	1	334159
8	19	64	6	10	1	334161
9,6	19	64	6	10	1	334164
12,7	25	70	6	10	1	334165
8	19	64	6	11	1	334162
9,6	19	64	6	11	1	334163
12,7	25	70	6	11	1	334166

Carbide Burrs


Carbide burr

HF 100 H



Properties: Flame-shaped burr - No designation in accordance with DIN 8032


Advantages: Well suited for working on moulded parts



Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
8	19	64	6	6	1	296193
9,6	19	65	6	6	1	297074
12,7	32	77	6	6	1	296194
8	19	64	6	10	1	334167
12,7	32	77	6	10	1	334169
8	19	64	6	11	1	334168
12,7	32	77	6	11	1	334170

Carbide burr

HF 100 J



Properties: Conical burr - 60° angle - Designation in accordance with DIN 8032: KSJ


Advantages: Suitable for chamfering or bevelling



All sizes and minimum purchasing quantities available on request

Carbide burr

HF 100 K



Properties: Conical burr - 90° angle - Designation in accordance with DIN 8032: KSK


Advantages: For deburring bore holes - For chamfering or bevelling



All sizes and minimum purchasing quantities available on request

Carbide burr

HF 100 L



Properties: Conical round-nosed burr - Designation in accordance with DIN 8032: KEL

Advantages: For difficult-to-access areas




Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
3	14	38	3	6	5	296199
9,6	30	76	6	3	1	300055
12,7	32	77	6	3	1	297470
6	18	50	6	6	1	296200
8	25,4	70	6	6	1	296205
9,6	30	76	6	6	1	296201
12,7	32	77	6	6	1	296192
9,6	30	76	6	10	1	334172
12,7	32	77	6	10	1	334173
10	20	65	6	11	1	334204
8	25,4	70	6	11	1	334171
12,7	32	77	6	11	1	334174

Carbide Burrs

Carbide burr

HF 100 M



Properties: Pointed cone burr - Designation in accordance with DIN 8032: SKM

Advantages: For deburring tasks - For conical holes and grooves - Ideal for model building



Diameter in mm	Height in mm	Total length in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
3	11	38	3	6	5	296114
6	20	50	6	6	1	296136
9,6	16	64	6	6	1	296144
8	18	64	6	6	1	300052
12,7	22	71	6	6	1	296148

Carbide burr

HF 100 N



Properties: Angular burr without end cut - Designation in accordance with DIN 8032: WKN

Advantages: Suitable for difficult-to-access areas, inner edges or conical profiles



All sizes and minimum purchasing quantities available on request

Carbide burr

HF 100 set



Properties: 40 piece burr set, cut 6, in lockable Klingspor presentation box

Contents: 2 x HF 100 B 6x18x6 (295532), 2 x HF 100 C 6x18x6 (295694), 2 x HF100 F 6x18x6 (295971), 2 x HF100 G 6x18x6 (296062), 2 x HF 100 L 6x18x6 (296200), 2 x HF 100 B 8x19x6 (295553), 2 x HF 100 C 8x19x6 (295713), 2 x HF 100 F 8x20x6 (295978), 2 x HF 100 G 8x19x6 (296066), 2 x HF 100 L 8x25,4x6 (296205), 2 x HF 100 B 9,6x19x6 (295569), 2 x HF 100 C 9,6x19x6 (295727), 2 x HF 100 F 9,6x19x6 (295987), 2 x HF 100 G 9,6x19x6 (296074), 2 x HF 100 L 9,6x30x6 (296201), 2 x HF 100 B 12,7x25x6 (295610), 2 x HF 100 C 12,7x25x6 (295753), 2 x HF 100 F 12,7x25x6 (296010), 2 x HF 100 G 12,7x25x6 (296086), 2 x HF 100 L 12,7x32x6 (296192)

Advantages: All top sellers at a glance

Size in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
335 x 225 x 380	6	6	1	300627

Carbide burr

HF 100 set



Properties: 5 piece burr set, cut 6, in a Klingspor screw box

Contents: HF 100 B 9,6x19x6 (295569), HF 100 C 9,6x19x6 (295727), HF 100 D 9,6x8x6 (295843), HF 100 E 9,6x16x6 (295916), HF 100 F 9,6x19x6 (295987)


Advantages: Presentation of the top sellers - Practical and safe storage of the burrs

Size in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
70 x 70 x 100	6	6	1	336927

Carbide Burrs

Carbide burr

HF 100 Steel



Properties: 5 piece burr set, cut 10, in Klingspor screw box


Contents: HF 100 A 9.6x19x6 (334120), HF 100 C 9.6x19x6 (334137), HF 100 D 9.6x8x6 (334146), HF 100 F 9.6x19x6 (334155), HF 100 L 9.6x30x6 (334172)

Advantages: Presentation of high performance Steel tooth geometry (Cut 10), safe and convenient storage of the burrs - Tothing optimised for processing steel and cast steel - Strikingly improved stock removal performance by contrast with standard cross-cut tooth geometries

Size in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
70 x 70 x 100	6	10	1	337154

Carbide burr

HF 100 Inox



Properties: 5 piece burr set, cut 11, in a Klingspor screw box

Contents: HF 100 A 9,6x19,0x6 (334121), HF 100 C 9,6x19x6 (334138), HF 100 D 9,6x8x6 (334145), HF 100 F 9,6x19x6 (334156), HF 100 L 10x20x6 (334204)

Advantages: Presentation of the high performance Inox cut - Practical and safe storage of the burrs - Optimized cut for working on austenitic, corrosion and acid-proof stainless steels - Considerably higher stock removal rate compared to the standard double cut

Size in mm	Shaft diameter in mm	Cut	Packing unit/pcs.	Cat. number
70 x 70 x 100	6	11	1	334221





Wire brushes









About the product

The wire brushes made by Klingspor are used for a wide variety of machining tasks in the steel and stainless steel sector. A key benefit a wire brush holds over abrasives is the fact that the brush only works on the surface of the workpiece without changing the shape of the workpiece to be processed. This benefit is of particular importance during work on ultra-thin sheet metal.

The selection of wire brushes offered by Klingspor comprises a comprehensive range of products that are designed for the most diverse machining tasks, materials and machines.

Applications

- Cleaning of weld seams and surfaces (rust removal, descaling, paint stripping)
- Deburring of cutting edges
- Structuring of surfaces (creating matt, satin or rough finishes)

Machines	Type of wire brush	Wire style	Bristle material	Material applications									Type	Page
				Construction steel	Carbon steel	Alloyed steels	Cast iron	Stainless steel	Aluminium	Copper	Brass	Wood		
	Wheel brush	Knotted	Steel wire	●	●	●	●						<i>BR 600 Z</i>	366
			INOX wire					●	●	●	●		<i>BRP 600 Z</i>	366
	Pipeline brush	Knotted	Steel wire	●	●	●	●						<i>BK 600 Z</i>	367
	Cone brush	Knotted	Steel wire	●	●	●	●						<i>BT 600 Z</i>	367
			INOX wire					●	●	●	●		<i>BT 600 W</i>	368
	Cup-shaped brush	Knotted	Steel wire	●	●	●	●						<i>BRS 600 Z</i>	368
   			INOX wire					●	●	●	●		<i>BRS 600 W</i>	369
	Wheel brush with shaft Ø 6 mm	Knotted	Steel wire	●	●	●	●						<i>BRS 600 P</i>	369
			INOX wire					●	●	●	●	●	<i>BTS 600 W</i>	370
	Wheel brush with shaft Ø 6 mm	Crimped	Steel wire	●	●	●	●						<i>BPS 600 Z</i>	370
			INOX wire					●	●	●	●		<i>BPS 600 W</i>	371
	Wheel brush with shaft Ø 6 mm	Abrasive bristle	SIC	●		●		●	●	●	●	●		
	Cup-shaped brush with shaft Ø 6 mm	Crimped	Steel wire	●	●	●	●						<i>BH 600</i>	372
			INOX wire					●	●	●	●		<i>BHP 600</i>	372
			Brass wire						●	●	●	●	<i>BHK 600</i>	373
	End brush with shaft Ø 6 mm	Knotted	Steel wire	●	●	●	●						<i>BHZ 600</i>	373
			INOX wire					●	●	●	●			
	End brush with shaft Ø 6 mm	Crimped	Steel wire	●	●	●	●							
			INOX wire					●	●	●	●			
	Handheld brush with wooden handpiece	Straight	Steel wire	●	●	●	●							
			INOX wire					●	●	●	●			
	Handheld brush with plastic handpiece	Crimped	Steel wire	●	●	●	●							
			INOX wire					●	●	●	●			
	Handheld brush fillet weld	Straight	Steel wire	●	●	●	●							
			INOX wire					●	●	●	●			
	Spark plug brush	Crimped	INOX wire					●	●	●	●			
			Brass wire						●	●	●			
									●	●	●			

● = main application

Wire brushes

Applications guide

The most common brushes at a glance



Wheel brushes

Preparing and finishing weld seams, deburring and cleaning cutting edges, corners or angles



Cone brushes

For work on difficult-to-access areas, corners or edges as well as for surface cleaning



Cup-shaped brushes

For efficient rust, paint or weld spatter removal from large surfaces



End brushes

Ideal tool for work on the insides of pipes, drill holes or indentations



Handheld brushes


For the manual cleaning of surfaces and weld seams

Wire brushes

Applications guide



- 1. Klingspor logotype**
Reference to certified Klingspor quality
- 2. Safety recommendations**
- 3. Rotational speed**
Reference to maximum permissible motor speed in revolutions per minute

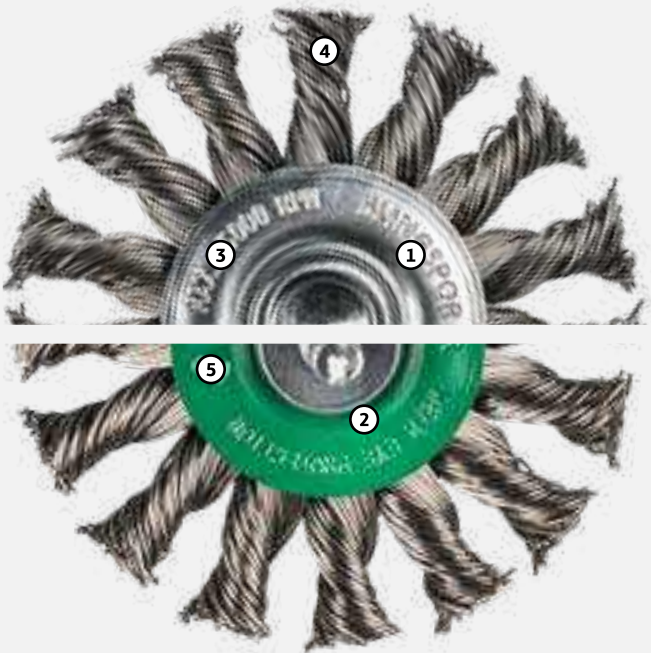

- 4. Wire style**
Klingspor offers wire brushes with knotted, crimped or SiC polyamide bristles
- 5. Area of application**
The base colour of the tool gives an indication of the wire material used
Green = stainless steel
Silver = steel

What the type designation reveals about the design of wire brushes

Product group	Type of wire brush	Performance class	Wire style
<div>B</div> Brushes	<div>K</div> Cone brush <div>R</div> Wheel brush <div>RP</div> Wheel brush pipeline <div>T</div> Cup-shaped brush <div>TS</div> Cup-shaped brush with shaft <div>PS</div> End brush with shaft <div>RS</div> Wheel brush with shaft <div>H</div> Handheld brush with wooden handpiece <div>HP</div> Handheld brush with plastic handpiece <div>HK</div> Fillet weld brush <div>HZ</div> Spark plug brush	<div>600</div> <div>SUPRA</div>	<div>Z</div> Knotted <div>W</div> Crimped <div>P</div> SiC polyamide bristles

Here explained by example of the BTS 600 W

Product group	Type of wire brush	Performance class	Wire style
<div>B</div> Brushes	<div>TS</div> Cup-shaped brush with shaft	<div>600</div> <div>SUPRA</div>	<div>W</div> Crimped

Wire brushes

Applications guide

Bristle materials and their properties

Wire types / style

Steel wire

High strength quality steel wire with great tensile and bending fatigue strength for exceptional economy.



Knotted

- Aggressive brush action
- Long service life
- Minimum flexibility

Non-corrosive steel wire / INOX

Quality stainless steel wire with great tensile strength for a long service life. Resistant to corrosion during applications on chromium-nickel steel, aluminium and other NF metals.



Crimped

- Gentle, material-friendly brush action
- For sensitive surfaces and soft materials
- Perfect contouring to the shape of the workpiece



Brass wire

Soft, fine brass wire for the surface finish of NF metals (copper, brass).



Polyamide bristle

A flexible abrasive bristle interspersed with SiC abrasive grain. Uniform brush action thanks to the continuous release of new abrasive grain.



Safe application of wire brushes

The maximum operating speed of the brush varies with the diameter of the brush and must never be exceeded for safety reasons. Before using the brush, always verify that the motor speed of the machine does not exceed the maximum operating speed of the brush.

Refer to the table below for a recommendation as to which brush diameter you can mount on which angle grinder:

		Ø 115 mm (max. 12,500 rpm)	Ø 125 mm (max. 11,500 rpm)	Ø 180 mm (max. 8,500 rpm)
Type of brush		Brush diameter		
	BR 600 Z Wheel brush, knotted	Ø 115 mm (max. 12,500 rpm)	Ø 125 mm (max. 12,500 rpm)	Ø 180 mm (max. 8,500 rpm)
	BRP 600 Z Pipeline brush, knotted	Ø 115 mm (max. 15,000 rpm)	Ø 125 mm (max. 12,500 rpm)	Ø 180 mm (max. 9,000 rpm)
	BK 600 Z Cone brush, knotted	Ø 100 mm Ø 115 mm (max. 12,500 rpm)		
	BT 600 Z Cup-shaped brush, knotted	Ø 65 mm (max. 12,500 rpm)		Ø 80 mm Ø 100 mm (max. 8,500 rpm)
	BT 600 W Cup-shaped brush, crimped	Ø 65 mm (max. 12,500 rpm)		Ø 80 mm Ø 100 mm (max. 8,500 rpm)


Cutting speeds

The cutting speeds are dependent on the material to be processed. Working within the proper speed range is paramount to the economical operation of the brush. Depending on the material, we recommend using the following cutting speeds as guidelines:

Material	Cutting speed [m/s]									
	10	15	20	25	30	35	40	45	50	55
Steel								40 - 50		
Stainless steel					30 - 35					
NF metals			18 - 22							
Plastic		15 - 20								


Safe use of shaft brushes

The receiving shaft should be as low as possible, but should be clamped into the tool holder with a depth of no less than 15 mm. If the exposed shaft length is $L_0 > 10\text{mm}$, the speed must be reduced for safety reasons.

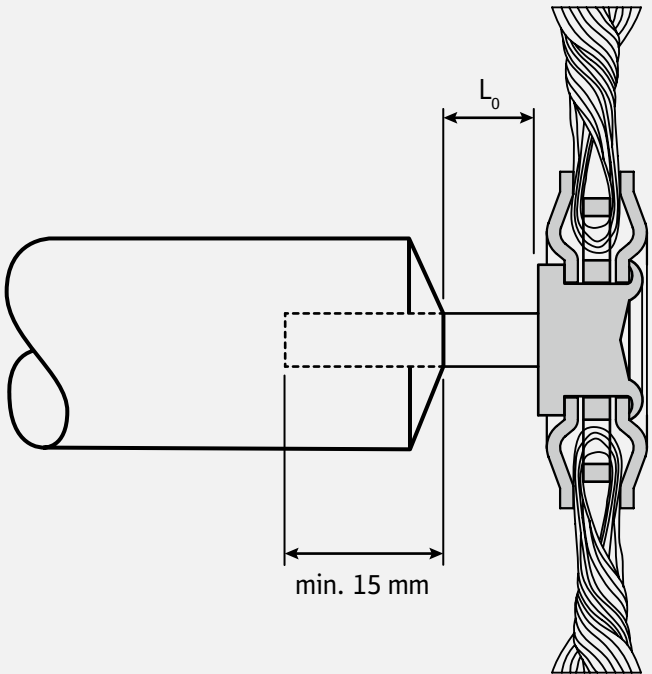

Tool pressure

You will achieve an optimum sanding result when working only with the wire tips of the brush. Increasing the tool pressure will cause the brush to wear out faster due to wire breakage and thus reduce the service life of the brush.

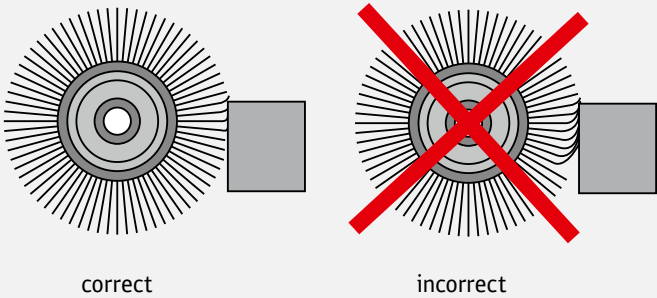

Factors with an impact on the brushing result

If the brushing result does not satisfy your requirements, you can optimise the outcome by changing certain application parameters.

Measure Problem	Brush Ø	Rotational speed	Wire thickness	Bristle length
Brush action too weak	increase	increase	increase	reduce
Brush action too aggressive	decrease	reduce	reduce	extend
Surface finish too rough and uneven	decrease	reduce	reduce	extend
Surface finish too fine	increase	increase	increase	reduce
Formation of secondary burrs	increase	increase	increase	reduce

The safe use of Klingspor abrasives

Manufactured in compliance with the requirements set out in the EN 1083-2, Klingspor wire brushes guarantee the highest level of safety for the user.



Wear safety goggles or glasses to protect the eyes



Wear dust mask



Use ear protectors



Wear safety gloves to protect hands



Observe safety instructions

Wire brushes

Wheel brush, knotted wire

BR 600 Z



NEW



Applications:

Stainless steel	●
Steel	●

Advantages: Wheel brush for pre- and post-processing of welding seams - For aggressive removal of scale, rust, slag - For heavy brushing and deburring work

Diameter x Width x Bore in mm	Fill material	Wire thickness in mm	Fill length in mm	Number of knots	Max. RPM	Packing unit/pcs.	Cat. number
115 x 14 x 22,23	Steel	0,50	22	20	12500 rpm	1	358311
115 x 14 x 22,23	Stainless steel	0,50	22	20	12500 rpm	1	358342
125 x 14 x 22,23	Steel	0,50	22	24	12500 rpm	1	358312
125 x 14 x 22,23	Stainless steel	0,50	22	24	12500 rpm	1	358343
178 x 14 x 22,23	Steel	0,50	42	30	9000 rpm	1	358313

Pipeline brush, knotted wire

BRP 600 Z



NEW



Applications:

Steel	●
-------	---

Advantages: Ideal tool for the professional processing of U / V-type welds in pipeline, pipework and container construction - Thanks to its slim overall width it is also well suited for working on hard-to-reach areas (e.g. root or narrow fillet welds) - Cleaning of all welding seams on pipe connections

Diameter x Width x Bore in mm	Fill material	Wire thickness in mm	Fill length in mm	Number of knots	Max. RPM	Packing unit/pcs.	Cat. number
115 x 6 x 22,23	Steel	0,50	28	32	15000 rpm	1	358314
125 x 6 x 22,23	Steel	0,50	22	36	12500 rpm	1	358315
178 x 6 x 22,23	Steel	0,50	46	48	9000 rpm	1	358319

Cone brush with thread, knotted wire

BK 600 Z



NEW !



Applications:

Steel	●
Stainless steel	●

Advantages: Ideal tool for working on hard-to-reach areas, inside corners and bevels - High brushing capacity due to knotted wire design - Excellent for cleaning larger surfaces - Removal of scale, rust, paint, slag, etc.

Diameter x Width in mm	Thread/Shaft	Fill material	Wire thickness in mm	Fill length in mm	Number of knots	Max. RPM	Packing unit/pcs.	Cat. number
100 x 14	thread M14	Steel	0,50	20	18	12500 rpm	1	358327
100 x 14	thread M14	Stainless steel	0,50	20	20	12500 rpm	1	358329
115 x 14	thread M14	Steel	0,50	22	18	12500 rpm	1	358328
115 x 14	thread M14	Stainless steel	0,50	22	20	12500 rpm	1	358330

Cup-shaped brush with thread, knotted wire

BT 600 Z



NEW !



Applications:

Steel	●
Stainless steel	●

Advantages: For aggressive brushing work on large, flat surfaces - For preparing metal surfaces before varnishing - Stable knotted wire design for easy cleaning and removal of slag, rust, scale and concrete residues

Diameter in mm	Thread/Shaft	Fill material	Wire thickness in mm	Fill length in mm	Number of knots	Max. RPM	Packing unit/pcs.	Cat. number
65	thread M14	Steel	0,35	22	18	12500 rpm	1	358334
65	thread M14	Steel	0,50	22	18	12500 rpm	1	358335
65	thread M14	Stainless steel	0,50	22	18	12500 rpm	1	358340
80	thread M14	Steel	0,50	22	20	8500 rpm	1	358337
100	thread M14	Steel	0,50	27	22	8500 rpm	1	358338

Wire brushes

Cup-shaped brush, crimped wire

BT 600 W



NEW !



Applications:

Steel	●
Stainless steel	●

Advantages: Ideal tool for cleaning and clearing profiled or uneven surfaces, e.g. checker plate - For medium-duty brushing work, derusting and removing paint, impurities and paint residues - Material-saving work - For processing very thin sheet metal, e.g. car workshops and restoration companies

Diameter in mm	Thread/Shaft	Fill material	Wire thickness in mm	Fill length in mm	Max. RPM	Packing unit/pcs.	Cat. number
65	thread M14	Steel	0,30	21	12500 rpm	1	358372
65	thread M14	Stainless steel	0,30	21	12500 rpm	1	358377
80	thread M14	Steel	0,30	24	8500 rpm	1	358373
80	thread M14	Stainless steel	0,30	24	8500 rpm	1	358326
100	thread M14	Steel	0,30	27	8500 rpm	1	358375

Wheel brush with shaft, knotted wire

BRS 600 Z



NEW !



Applications:

Steel	●
Stainless steel	●

Advantages: Knotted design for rough brushing work and long service life - For efficient work in hard-to-reach areas such as grooves, flutes, depressions -Deburring of cut edges, removal of scale, paint, slag

Diameter x Width x Shaft in mm	Total length in mm	Fill material	Wire thickness in mm	Fill length in mm	Number of knots	Max. RPM	Packing unit/pcs.	Cat. number
75 x 12 x 6	37	Steel	0,50	19	15	25000 rpm	10	358320
75 x 12 x 6	37	Stainless steel	0,50	19	15	25000 rpm	10	358321

Wheel brush with shaft, crimped wire

BRS 600 W



NEW !



Applications:

Steel	●
Stainless steel	●

Advantages: Crimped wire design for gentle cleaning of small to medium surfaces - Excellently suitable for components with difficult access such as beads, flanged edges - Good brushing performance even with profiled workpieces

Diameter x Width x Shaft in mm	Total length in mm	Fill material	Wire thickness in mm	Fill length in mm	Max. RPM	Packing unit/pcs.	Cat. number
30 x 9 x 6	40	Steel	0,20	6	20000 rpm	20	358346
30 x 9 x 6	40	Stainless steel	0,20	6	20000 rpm	20	358357
40 x 9 x 6	40	Steel	0,20	11	18000 rpm	20	358348
40 x 9 x 6	40	Stainless steel	0,20	11	18000 rpm	20	358358
50 x 9 x 6	40	Steel	0,30	13	15000 rpm	10	358354
50 x 9 x 6	40	Stainless steel	0,30	13	15000 rpm	10	358359
60 x 14 x 6	44	Steel	0,30	18	15000 rpm	10	358355
60 x 14 x 6	44	Stainless steel	0,30	18	15000 rpm	10	358360
70 x 16 x 6	48	Steel	0,30	20	15000 rpm	10	358356
70 x 16 x 6	48	Stainless steel	0,30	20	15000 rpm	10	358362

Wheel brush with shaft, polyamide bristles

BRS 600 P



NEW !



Applications:

Stainless steel	●
NF metals	●
Wood	●

Advantages: Abrasive bristles of polyamide interspersed with silicon carbide (SiC) grain for working with light contact pressure - Ideal for structuring and paint stripping of wooden components - Removal of oxide layers on non-ferrous metals or of tarnish colours on stainless steel components, e.g. filled rods on stainless steel railings

Diameter x Width x Shaft in mm	Total length in mm	Fill material	Fill length in mm	Max. RPM	Packing unit/pcs.	Cat. number
50 x 9 x 6	45	Polyamide SiC grit 120	10	6000 rpm	10	358364
50 x 9 x 6	45	Polyamide SiC grit 320	10	6000 rpm	10	358366
70 x 12 x 6	45	Polyamide SiC grit 120	14	4500 rpm	10	358367
70 x 12 x 6	45	Polyamide SiC grit 320	14	4500 rpm	10	358369

Wire brushes

Cup-shaped brush with shaft, crimped wire

BTS 600 W



NEW !



Applications:

Steel	●
Stainless steel	●

Advantages: Ideal tool for cleaning small and medium-sized surfaces - Crimped wire ideal for fine machining or surface preparation of steel or stainless steel - Removes paint, rust, incrustations

Diameter x Shaft in mm	Total length in mm	Fill material	Wire thickness in mm	Fill length in mm	Max. RPM	Packing unit/pcs.	Cat. number
50 x 6	70	Steel	0,30	24	13000 rpm	20	358331
50 x 6	70	Stainless steel	0,30	24	13000 rpm	20	358332

End brush with shaft, knotted wire

BPS 600 Z



NEW !



Applications:

Steel	●
Stainless steel	●

Advantages: Tool diameter changes depending on the rotation speed - Perfectly suited for working on pipe inner surfaces or bores - High brushing effect due to knotted wire design

Diameter x Shaft in mm	Total length in mm	Fill material	Wire thickness in mm	Fill length in mm	Number of knots	Max. RPM	Packing unit/pcs.	Cat. number
19 x 6	70	Steel	0,35	25	6	20000 rpm	20	358333
19 x 6	70	Stainless steel	0,35	25	6	20000 rpm	20	358336
22 x 6	70	Steel	0,35	25	8	20000 rpm	10	358339
22 x 6	70	Stainless steel	0,35	25	8	20000 rpm	10	358341
30 x 6	72	Steel	0,35	25	12	20000 rpm	10	358344
30 x 6	72	Stainless steel	0,35	25	12	20000 rpm	10	358345

End brush with shaft, crimped wire

BPS 600 W



NEW !



Applications:

Steel	●
Stainless steel	●

Advantages: For fine machining and removal of light burrs in pipes or bores - Well suited for processing and cleaning moulds and die-cast parts - Very soft and adaptable tool

Diameter x Shaft in mm	Total length in mm	Fill material	Wire thickness in mm	Fill length in mm	Max. RPM	Packing unit/pcs.	Cat. number
12 x 6	70	Steel	0,30	25	20000 rpm	20	358350
12 x 6	70	Stainless steel	0,30	25	20000 rpm	20	358351
25 x 6	75	Steel	0,30	25	18000 rpm	10	358347
25 x 6	75	Stainless steel	0,30	25	18000 rpm	10	358352
30 x 6	75	Steel	0,30	25	18000 rpm	10	358349
30 x 6	75	Stainless steel	0,30	25	18000 rpm	10	358353

Wire brushes

Hand brush with wooden body

BH 600



NEW !



Applications:

Steel	●
Stainless steel	●
NF metals	●

Advantages: Hand brush with wooden handle for manual removal of rust, dirt, paint

Length in mm	Effective length in mm	Fill length in mm	Fill material	Structure	Number of rows	Wire thickness in mm	Packing unit/pcs.	Cat. number
290	125	25	Steel	Straight	2	0,35	12	358361
290	125	25	Steel	Straight	3	0,35	12	358376
290	125	25	Steel	Straight	4	0,35	12	358365
290	125	25	Steel	Straight	5	0,35	12	358363
290	125	25	Stainless steel	Straight	3	0,30	12	358368
290	125	25	Stainless steel	Straight	4	0,30	12	358370
290	125	25	Brass	Crimped	3	0,35	12	358371
290	125	25	Brass	Crimped	4	0,35	12	358374

Hand brush with plastic handle

BHP 600



NEW !



Applications:

Steel	●
Stainless steel	●
NF metals	●

Advantages: Comfortable handling due to ergonomically shaped plastic handle - Crimped wire design for gentle cleaning of steel, stainless steel or non-ferrous metals

Length in mm	Effective length in mm	Fill length in mm	Fill material	Structure	Wire thickness in mm	Packing unit/pcs.	Cat. number
265	140	25	Steel	Crimped	0,30	24	358323
265	140	25	Stainless steel	Crimped	0,30	24	358324
265	140	25	Brass	Crimped	0,30	24	358325

Fillet weld brush

BHK 600



NEW !



Applications:

Steel	●
Stainless steel	●
NF metals	●

Advantages: V-shaped wire fill ideal for cleaning and cleansing fillet and V-type welds - Well suited for working in hard-to-reach areas, e.g. corners or angles

Length in mm	Effective length in mm	Fill length in mm	Fill material	Structure	Number of rows	Wire thickness in mm	Packing unit/pcs.	Cat. number
290	125	25	Steel	Straight	3	0,35	12	358378
290	125	25	Stainless steel	Straight	3	0,30	12	358379

Spark plug brush

BHZ 600



NEW !



Applications:

Steel	●
Stainless steel	●
NF metals	●

Advantages: Soft brass or stainless steel wire suitable for fine brushing work - Ideal for the gentle cleaning of contact surfaces, e.g. spark plugs or electrodes

Length in mm	Effective length in mm	Fill length in mm	Fill material	Structure	Number of rows	Wire thickness in mm	Packing unit/pcs.	Cat. number
150	45	15	Brass	Crimped	3	0,17	25	358322
150	45	15	Stainless steel	Crimped	3	0,17	25	358463



D.I.Y. range

The new Klingspor D.I.Y. range in user friendly packaging

The relevant grit ranges and assortments in customised packing units. Uniform packing design, precise product identification for quick access.

Coated abrasives – the ideal presentation: Klingspor offers a display system for an attractive and sales promoting presentation of the products. The compact space saving display packaging allows an efficient use of the sales area.

Klingspor expert advisers are at your disposal.

Type	Machines								Material applications								Page
	Hand sanding and finishing	Hand block	Orbital sander	Hand tool belt grinder	Portable belt sander	Angle grinderr	Random orbital sander	Delta sander	Steel	Stainless steel	Paint / varnish / fillers	Wood	Metals	NF metals	Plastics	Glass / stone	
PL 31 B	●	●	●								●	●	○				376
PS 11 A	●										●			○	●	○	379
PS 11 C	●										●			○	●	○	378
PL 31 B	●										●	●	○				379
KL 371 X	●												●	●			380
PL 31 B			●								●	●	○				380
PS 22 K			●							○	○	●	●		○		382
CS 310 XF				●					●	●			●	●			376
LS 309 XH					●						○	●	●	●			377
CS 561						●			●	○		○	●	●	○		378
A 60 TZ						●			●	●				●			384
PS 22 K							●			○	○	●	●		○		383
PS 22 K								●		○	○	●	●		○		382

● = main application ○ = possible application

The D.I.Y. Range

Finishing paper

PL 31 B D.I.Y. Packs



Properties

Bonding agent	Glue
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	○

Advantages: Product with optimal price-performance ratio - Optimized wear properties for hand sanding and handheld machine sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Cat. number
115 x 5000	40	241817
115 x 5000	60	241818
115 x 5000	80	241819
115 x 5000	120	241820
115 x 5000	180	241821

Packing unit (Minimum order quantity) = 5 rolls

File belt, abrasive cloth

CS 310 XF D.I.Y. Packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	XF-cotton

Applications:

Stainless steel	●
Metals	●
NF metals	●
Steel	●

Advantages: Universal type for working on radiuses and contours with belt files in all areas of metalworking

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Belt joint	Cat. number
13 x 457	40	F4G	248820
13 x 457	60	F4G	248821
13 x 457	120	F4G	248822

Packing unit (Minimum order quantity) = 6 assortments of 3 belts

Abrasive cloth

LS 309 XH D.I.Y. Packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Wood	●
Metals	●
NF metals	●
Paint/Varnish/Filler	⦿

Advantages: Special type for portable belt sanders - For universal use on wood, metal, paint and varnish - Large product mix of belts for all standard machines

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Belt joint	Cat. number
65 x 410	60	F5	7001
65 x 410	80	F5	7002
65 x 410	120	F5	7004
75 x 457	40	F5	9189
75 x 457	60	F5	9176
75 x 457	80	F5	9172
75 x 457	100	F5	9171
75 x 457	120	F5	7138
75 x 480	60	F5	7007
75 x 480	80	F5	7008
75 x 480	120	F5	7010
75 x 533	40	F5	7018
75 x 533	60	F5	7019
75 x 533	80	F5	7020
75 x 533	100	F5	7021
75 x 533	120	F5	7022
75 x 533	150	F5	7023
75 x 533	180	F5	7077
100 x 560	40	F5	7036
100 x 560	60	F5	7037
100 x 560	80	F5	7038
100 x 560	100	F5	7039
100 x 560	120	F5	7040
100 x 610	40	F5	7080
100 x 610	60	F5	7081
100 x 610	80	F5	7082
100 x 610	100	F5	7083
100 x 610	120	F5	7084
105 x 620	40	F5	7030
105 x 620	60	F5	7031
105 x 620	80	F5	7032
105 x 620	120	F5	7034

Packing unit (Minimum order quantity) = 6 assortments of 3 belts

The D.I.Y. Range

Abrasive fibre disc

CS 561 D.I.Y. Packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close

Applications:

Steel	●	Stainless steel	ⓘ
NF metals	●	Wood	ⓘ
Metals	●		
Plastic	ⓘ		

Advantages: For universal use - Largest selection of diameters, grit sizes and hole patterns

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter x Hole in mm	Grit	Hole pattern	Cat. number
115 x 22	24	⊗ 30	255905
115 x 22	40	⊗ 30	255906
115 x 22	60	⊗ 30	255907
115 x 22	80	⊗ 30	255908
115 x 22	120	⊗ 30	255909
125 x 22	24	⊗ 30	255910
125 x 22	40	⊗ 30	255911
125 x 22	60	⊗ 30	255912
125 x 22	80	⊗ 30	255913
125 x 22	120	⊗ 30	255914

Packing unit (Minimum order quantity) = 5 assortments of 5 fibre discs

Abrasive paper, waterproof

PS 11 C D.I.Y. Packs



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	C-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●
Glass/Stone	ⓘ
Metals	ⓘ

Advantages: Special product for auto repair and painting - For hard and tough surfaces - Good adaptation and high stability - Wet and dry sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Cat. number
230 x 280	120	241787
230 x 280	180	241789

Packing unit (Minimum order quantity) = 5 assortments of 5 sheets

Abrasive paper, waterproof

PS 11 A D.I.Y. Packs



Properties

Bonding agent	Resin
Grain	SiC
Coating	Close
Backing	A-paper

Applications:

Paint/Varnish/Filler	●
Plastic	●
Glass/Stone	⓪
Metals	⓪

Advantages: Special product for auto repair and painting - For hard and tough surfaces - Good adaptation and high stability - Wet and dry sanding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Cat. number
230 x 280	240	241790
230 x 280	400	241791

Packing unit (Minimum order quantity) = 5 assortments of 5 sheets

Finishing paper

PL 31 B D.I.Y. Packs



Properties

Bonding agent	Glue
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	⓪

Advantages: Product with optimal price-performance ratio - Optimized wear properties for hand grinding - Very fine surface scratch pattern

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Cat. number
230 x 280	40	241776
230 x 280	60	241777
230 x 280	80	241778
230 x 280	120	241779
230 x 280	240	241780

Packing unit (Minimum order quantity) = 5 assortments of 5 sheets

The D.I.Y. Range

Abrasive cloth, blue

KL 371 X D.I.Y. Packs



Properties

Bonding agent	Glue
Grain	Aluminium oxide
Coating	Close
Backing	X-cotton

Applications:

Metals	●
NF metals	●

Advantages: Attractively priced universal product for surface hand grinding

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Cat. number
230 x 280	40	241781
230 x 280	60	241783
230 x 280	80	241784
230 x 280	120	241785
230 x 280	240	241786

Packing unit (Minimum order quantity) = 5 assortments of 5 sheets

Finishing paper

PL 31 B D.I.Y. Packs



Properties

Bonding agent	Glue
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper

Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	○

Advantages: Product with optimal price-performance ratio - Optimised wear properties for hand-held machine grinding - Very fine surface scratch pattern








Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Cat. number
93 x 230	40		241732
93 x 230	60		241733
93 x 230	80		241734
93 x 230	120		241735
93 x 230	180		241736
93 x 230	40	GL 9	241725
93 x 230	60	GL 9	241726
93 x 230	80	GL 9	241727



►► Continuation of PL 31 B D.I.Y. Packs, Finishing paper

Width x Length in mm	Grit	Hole pattern	Cat. number
93 x 230	120	 GL 9	241728
93 x 230	180	 GL 9	241729
93 x 230	240	 GL 9	241730
115 x 280	40		241678
115 x 280	60		241679
115 x 280	80		241680
115 x 280	120		241681
115 x 280	180		241682
115 x 280	40	 GL 1	241670
115 x 280	60	 GL 1	241671
115 x 280	80	 GL 1	241673
115 x 280	120	 GL 1	241674

Packing unit (Minimum order quantity) = 5 assortments of 10 strips

Finishing paper

PL 31 B D.I.Y. Packs Set



Properties

Bonding agent	Glue
Grain	Aluminium oxide
Coating	Semi-open
Backing	B-paper


Applications:

Paint/Varnish/Filler	●
Wood	●
Metals	ⓘ

Advantages: Product with optimal price-performance ratio - Optimised wear properties for hand-held machine grinding - Very fine surface scratch pattern - Assortments in three pieces grit 40, three pieces grit 80 and four pieces grit 120

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Cat. number
93 x 230	several grain sizes		241738
93 x 230	several grain sizes	 GL 9	241731
115 x 280	several grain sizes		241684

Packing unit (Minimum order quantity) = 5 assortments of 10 strips

The D.I.Y. Range

Abrasive paper, self-fastening

PS 22 K D.I.Y. Packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	E-paper

Applications:

Wood	●
Metals	●
Stainless steel	○
Paint/Varnish/Filler	○

Plastic	○
---------	---

Advantages: High removal rate - Uniform scratch pattern

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Width x Length in mm	Grit	Hole pattern	Cat. number
115 x 230	40	GL 15	241663
115 x 230	60	GL 15	241664
115 x 230	80	GL 15	241665
115 x 230	120	GL 15	241666
115 x 230	180	GL 15	241667

Packing unit (Minimum order quantity) = 5 assortments of 10 strips

Abrasive paper, self-fastening

PS 22 K D.I.Y. Packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	E-paper

Applications:

Wood	●
Metals	●
Stainless steel	○
Paint/Varnish/Filler	○

Plastic	○
---------	---

Advantages: Universal abrasive disc for metalworking and woodworking - Uniform surface scratch pattern - Available in many grit sizes and dimensions

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Hole pattern	Cat. number
96	40	GLS 15	241656
96	60	GLS 15	241657
96	80	GLS 15	241658
96	120	GLS 15	241659
96	180	GLS 15	241660

Packing unit (Minimum order quantity) = 5 assortments of 5 triangles

Abrasive paper, self-fastening

PS 22 K D.I.Y. Packs



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	E-paper

Applications:

Wood	●	Plastic	●
Metals	●		
Stainless steel	○		
Paint/Varnish/Filler	○		

Advantages: Universal abrasive disc for metalworking and woodworking - Uniform surface scratch pattern - Available in many grit sizes and dimensions

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Hole pattern	Cat. number
115	40	○ 0	278805
115	60	○ 0	278806
115	80	○ 0	278807
115	120	○ 0	278808
115	180	○ 0	278809
115	40	⊗ GLS 4	243219
115	60	⊗ GLS 4	241608
115	80	⊗ GLS 4	243220
115	120	⊗ GLS 4	241610
115	180	⊗ GLS 4	241611
125	40	○ 0	278810
125	60	○ 0	278811
125	80	○ 0	278812
125	120	○ 0	278813
125	180	○ 0	278814
125	40	⊗ GLS 5	241614
125	60	⊗ GLS 5	241625
125	80	⊗ GLS 5	241626
125	120	⊗ GLS 5	241627
125	180	⊗ GLS 5	241628
150	40	⊗ GLS 3	241649
150	60	⊗ GLS 3	241650
150	80	⊗ GLS 3	241651
150	120	⊗ GLS 3	241652
150	180	⊗ GLS 3	241653
150	40	⊗ GLS 51	319068
150	60	⊗ GLS 51	319069
150	80	⊗ GLS 51	319070
150	120	⊗ GLS 51	319071
150	180	⊗ GLS 51	319073

Packing unit (Minimum order quantity) = 5 assortments of 5 discs

The D.I.Y. Range

Abrasive paper, self-fastening

PS 22 K D.I.Y. Packs Set



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	E-paper

Applications:

Wood	●	Plastic	ⓘ
Metals	●		
Stainless steel	ⓘ		
Paint/Varnish/Filler	ⓘ		

Advantages: Universal abrasive disc for metalworking and woodworking - Uniform surface scratch pattern - Available in many grit sizes and dimensions

Set discs: Assortments in two pieces grit 40, two pieces grit 80 and two pieces grit 120

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------

Diameter in mm	Grit	Hole pattern	Cat. number
96	several grain sizes	△ GLS 15	241662
125	several grain sizes	⊙ GLS 5	241630
150	several grain sizes	⊙ GLS 51	319072

Packing unit (Minimum order quantity) = 5 assortments = 30 pieces (discs, triangles)

Cutting-off wheel

A 60 TZ SPECIAL D.I.Y Packs



Class SPECIAL

Bond	■ ■ ■ ■ ■ □ □
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □ □

Applications:

Stainless steel	●
Steel	●
NF metals	ⓘ

Advantages: Free of iron, sulfur and chlorine - Short cutting times - Minimal burr formation - Low thermal load

Diameter x Width x Bore in mm	Form	Max. operating speed	Max. RPM	Cat. number
115 x 1 x 22,23	—	80 m/s	13300 rpm	257875
125 x 1 x 22,23	—	80 m/s	12200 rpm	257876

Packing unit (Minimum order quantity) = 1 assortment of 10 cutting-off wheels

Notes



D.I.Y. Range

Point of Sale

Flexible, easy care and maintenance, representative: The new, modular POS system by Klingspor

The full range of products – from the showroom to one-on-one selling. It must be representative, boost sales and be easy to care for – the requirements for a POS are manifold and keep changing. The new POS system by Klingspor can be configured according to individual needs.

Flexibility

The new Klingspor POS system is flexibly scalable. Standardised modules with a width of one metre can be extended in height and width. All new POS elements are fully compatible with previous Klingspor POS modules.

Optimally representative


The effective image modules complement your POS presentation. The artwork can be customised according to your product range and display requirements.

Minimal effort for care and maintenance

The modular design and easily changeable magnetic foils keep your display up to date. Popular products and promotions that make for sales momentum can be installed on the display with a few simple steps. Products can be stored in the optional base drawer.


Point of Sale Brochure

Please request our Point of Sale brochure for more detailed information on the POS elements, modules and accessories.



Backlit top panels

Simple but effective. With backlit top panels that disperse light to the front as well as on the products, you'll find it easy to attract attention to your POS.




Optional storage space

A handy base drawer for storing fast moving products.




Flexible labelling due to detachable magnetic foils

Provide quick and easy changing.




Representative image module

Highlight the products in your range with this effective hexagon design, which can be customised accordingly.



Customised artwork available

Design the POS with individual eye-catching designs. We are happy to advise you.



Magnetic top panels

The magnetic foils can also be applied to the centre gondola and enable easy care and maintenance.

Safety recommendations

General Principles of Safety

Abrasive products improperly used can be very dangerous.

- ▶ Always follow the instructions provided by the abrasive product and machine supplier.
- ▶ Ensure that the abrasive product is suitable for its intended use. Examine all abrasive products for damage or defects before use.
- ▶ Follow the correct procedures for handling and storage of abrasive products. Be aware of the hazards likely during the use of abrasive products and observe the recommended precautions to be taken:
- ▶ Bodily contact with the abrasive product at operating speed.
- ▶ Injury resulting from product breakage during use.
- ▶ Grinding debris, sparks, fumes and dust generated by the grinding process.
- ▶ Noise
- ▶ Vibration

Use only abrasive products conforming to the highest standards of safety. These products will bear the relevant EN standard number and/or the inscription "oSa":

- ▶ EN 12413 for Bonded Abrasives.
- ▶ EN 13236 for Superabrasives.
- ▶ EN 13743 for Specific Coated Abrasives (vulcanised fibre discs, flap wheels, flap discs and spindle-mounted flap wheels).

Never use a machine that is not in good working order or one with defective parts. Employers should carry out a risk assessment on all individual abrasive processes to determine the appropriate protective measures necessary. They should ensure that their employees are suitably trained to carry out their duties.

More detailed information on the safe use of abrasive products, comprehensive Safety Codes are available from FEPA or your National Trade Association.

- ▶ FEPA Safety Code for Bonded Abrasives and Precision Superabrasives.
- ▶ FEPA Safety Code for Superabrasives for Stone and Construction.
- ▶ FEPA Safety Code for Coated Abrasives.

Precautions against likely hazards

Bodily contact with the abrasive product

- ▶ Always take great care and attention when using abrasive products. Tie back long hair and do not wear loose clothing, ties or jewellery.
- ▶ Prevent accidental start up of the machine before mounting or changing an abrasive product. Isolate machines from their power source where necessary.
- ▶ Never remove guards from machines where fitted and ensure they are in good condition and properly adjusted before starting the machine.
- ▶ Always use gloves and suitable clothing where the workpiece or machine is handheld. For gloves, a minimum protection level of EN 388 Category 2 is recommended.
- ▶ After switching off the machine, ensure the product has come to rest before leaving the machine unattended.

Injury caused by product breakage

- ▶ Always handle abrasives with great care, they are easily damaged. Examine all products for defects or damage before use.
- ▶ Store abrasives in dry, frost-free conditions avoiding wide variations in temperature. Ensure they are properly protected and supported to prevent damage and distortion.
- ▶ Coated abrasives remain usable for at least 5 years if stored in temperatures of 18-22 °C and at a relative humidity of 45-65 % and if protected against mechanical impact and the effects of radiation, chemicals, mould and other micro-organisms.
- ▶ Abrasive belts should be hung on a rod or peg not less than 50mm diameter.
- ▶ Never use an abrasive product beyond its expiry date where marked. Observe the recommended shelf life for the following specific products; Resinoid and Shellac products 3 years, Rubber products 5 years, Vitrified products 10 years.
- ▶ Check abrasive product or package for any warnings or other safety information.
- ▶ Ensure that the correct abrasive product is selected. Never use a product if it cannot be properly identified.
- ▶ Follow the instructions provided by the abrasive product or machine supplier when mounting abrasive products. Observe any mounting indications marked on the product such as direction of run or mounting position.
- ▶ Never force the abrasive product onto the mounting fixture or modify it to fit.
- ▶ Never exceed the maximum operating speed where specified.
- ▶ Check that the correct mounting devices are used and that they are undistorted, clean and free from burrs.
- ▶ Use mounting blotters where supplied.
- ▶ Do not tighten the mounting device excessively.
- ▶ After mounting or re-mounting an abrasive product, conduct a trial run at operating speed with the guard in place for at least 30 seconds, standing clear of the machine before use.
- ▶ Never remove guards from machines where fitted and ensure they are in good condition and properly adjusted.
- ▶ Ensure that the workpiece is secure and properly supported. Ensure that work rests are properly adjusted and secure.
- ▶ Never start the machine with the workpiece in contact with the abrasive product.
- ▶ Never apply excessive force or shock to the abrasive product or let it overheat.
- ▶ Do not grind on the part of the product that is not designed for the operation.
- ▶ Avoid grinding with the edge of abrasive belts, use the centre of the belt if possible.
- ▶ Avoid clogging and uneven wear to ensure that the abrasive product is working efficiently. Dress frequently where appropriate.
- ▶ Let the abrasive product stop naturally, not by applying pressure to its surface.
- ▶ Turn off and spin out excess coolant before stopping the machine.
- ▶ Do not leave abrasive belts under tension when not in use.



Not permitted for handheld or manually-guided grinding



Do not use for wet grinding



Not permitted for face grinding



Do not use if damaged



Only permitted with a backing pad



Use ear protectors



Observe safety instructions



Wear safety gloves to protect hands



Wear safety goggles or glasses to protect the eyes



Wear a dust mask



Only permitted for wet cutting



Only permitted for use on totally enclosed machines

Grinding debris – sparks, dust and fumes

- ▶ Exposure to dust generated from workpiece and/or abrasive materials can result in lung damage and/or other physical injury.
- ▶ All dry grinding processes should be provided with adequate extraction facilities.
- ▶ Do not use abrasive products near flammable materials.
- ▶ The use of respirators complying with EN149 is recommended for dry grinding processes even if extraction systems are provided.
- ▶ Guards where provided should be adjusted to deflect sparks and debris away from the operator.
- ▶ Take additional measures to protect people working nearby.
- ▶ Eye protection is recommended for all machine applications for abrasives. For handheld machines or workpiece, goggles or full face shields are recommended.
- ▶ Eye protection with a minimum protection of EN166 Grade B is recommended.
- ▶ Ensure that the correct abrasive product is selected. An unsuitable product can produce excessive debris and dust.

Noise

- ▶ Ear protection complying with EN352 is recommended for all applications where the workpiece or machine is handheld, irrespective of the noise level.
- ▶ Ensure that the correct abrasive product is selected. An unsuitable product can produce excessive noise.

Vibration

- ▶ Processes where the workpiece or machine is handheld can cause vibration injury.
- ▶ Action needs to be taken if tingling, pins and needles or numbness is experienced after 10 minutes continuous use of the abrasive product.
- ▶ The effects of vibration are more pronounced in cold conditions so keep the hands warm and exercise hands and fingers regularly. Use modern equipment with low vibration levels.
- ▶ Maintain all equipment in good condition and stop the machine and have it checked if excessive vibration occurs.
- ▶ Use good quality abrasive products and keep them in good condition during their life.
- ▶ Maintain mounting flanges and backing pads in good condition and replace if worn or distorted.
- ▶ Do not grip the workpiece or machine too tightly and do not exert excessive pressure on the abrasive product.
- ▶ Avoid continuous use of the abrasive product.
- ▶ Use the correct product. An unsuitable product can produce excessive vibration.
- ▶ Don't ignore the physical symptoms of vibration – seek medical advice.

Disposal of abrasives

- ▶ Used or defective abrasives should be disposed in accordance with local or national regulations.
- ▶ Further information can be obtained from material safety data sheets provided by the supplier.
- ▶ Be aware that the abrasive product may be contaminated with material from the workpiece or process after use.
- ▶ Disposed abrasive products should be damaged to prevent them from being taken from waste skips and re-used.

SAFETY RECOMMENDATIONS FOR THE USE OF ABRASIVE BELTS


1. General safety recommendations

- ▶ Ensure that quality and dimensions of the belt are correct for the machine and type of application. Refer to the machine manufacturer's instructions.
- ▶ Do not use near easily flammable material.
- ▶ Prevent long hair, loose clothes or jewellery from getting into contact with the machine and being pulled in. Take precautionary measures.
- ▶ Ensure that people nearby are protected from chips, sparks, debris, fumes, dust and noise. Belt grinding operations may produce high concentrations of dust, gas or mist, which can represent a health hazard as well as a risk of explosion.
- ▶ Do not open the guard or put down the machine until the belt has come to a complete standstill.

2. Specific safety recommendations

- ▶ Abrasive belts can tear. Please take precautions against risks by tearing of belt (e.g. protective clothing and devices, safety equipment of machinery).
- ▶ Abrasive machines, which do not have a completely closed guard require comprehensive protective equipment of the user (e.g. protective gloves, leather aprons, face shield, dust mask).
- ▶ Check the locking mechanism of the machine cover. Do not remove guards. Any contact with running belts can result in serious injuries.
- ▶ When mounting, refer to direction of running advice, if necessary.
- ▶ Make sure the workpiece is held correctly or is mechanically secured.
- ▶ Start the machine and wait until belt has reached its full operational speed before grinding.
- ▶ Belts should only be used dry unless specified as suitable for wet grinding (please contact the manufacturer if in any doubt).
- ▶ Use the centre of the belt, if possible, and grind as flat as possible. Avoid grinding with the edge of the belt as well as strong punctual loading e.g. through sharp or sharp-edged workpieces.
- ▶ Do not exert excessive pressure and prevent the belt from overheating.
- ▶ Check the belts in use periodically for wear and tear or damage (e.g. cracks at edges, fracturing or strong wear and tear in the joint) and replace the belts if necessary.


Due to the extraordinary variety of applications and machine constructions, these recommendations are limited to basic aspects of safety. Further safety regulations and instructions can be taken from the respective legislation, decrees and technical standards.



Grid of dots for notes.

Notes





Grid of dots for notes.

Notes





A large rectangular area filled with a light gray dot grid pattern, intended for handwritten notes.



Klingspor N.V. / S.A.
Herent, België / Belgique

Клингспор България ЕООД
София, България

KLINGSPOR Brusivo, spol.sr.o.
Brno, Česká republika

Klingspor A/S
Kolding, Danmark

Klingspor Schleifsysteme GmbH & Co. KG
Haiger, Deutschland

Klingspor Abrasivos S.A.
Alcobendas (Madrid), España

Klingspor S.A.S.
Le Perray en Yvelines, France

Klingspor Abrasives Limited
Workshop, Nottinghamshire
Great Britain

Klingspor S.R.L
Brescia, Italia

Klingspor Magyarország Kft.
Budapest, Magyarország

Klingspor B.V.
Sittard, Nederland

Klingspor Schleifwerkzeuge GesmbH
Wien, Österreich

Klingspor Sp. z o.o.
Bielsko, Polska

Klingspor Sp. z o.o.
Kozy, Polska

Klingspor România SRL
Pantelimon, Ilfov, România

Клингспор ООО
Москва, Россия

Klingspor d.o.o. Beograd
Beograd, Republika Srbija

Klingspor Suisse GmbH
Bubendorf, Suisse

Клингспор ТОВ
Великі Мости, Львівська обл.,
Україна

Klingspor Inc.
Stoney Creek, Ontario, Canada

Klingspor Abrasivos S.A. de C.V.
Tijuana, Mexico

Klingspor Abrasives, Inc.
Hickory, North Carolina, USA

Klingspor Qingdao Ltd.
Qingdao, P.R. China

Klingspor Abrasive (Shanghai) Co. Ltd.
Shanghai, P.R. China

Klingspor India Private Limited
Pune, India

Klingspor PTE LTD
Singapore, Singapore

Klingspor PTE LTD
Bangkok, Ratcha-anachak Thai

Klingspor Middle East FZCO
Dubai, United Arab Emirates

Klingspor Vietnam Limited
Ho Chi Minh City, Vietnam

Klingspor Argentina SRL
Belén de Escobar, Buenos Aires,
Argentina

Klingspor Abrasivos Industriais Ltd
Pinhais, Brasil

Comercial Klingspor Chile Ltda.
Pudahuel, Santiago, Chile

Klingspor SAC
Lima, Perú

Klingspor Abrasives South Africa (Pty) Ltd.
Spartan-Kempton Park,
South Africa

Klingspor Australia Pty Ltd
Silverwater, Australia

www.klingspor.de



[/klingsporag](https://www.facebook.com/klingsporag)



[/company/klingsporag](https://www.linkedin.com/company/klingsporag)



[/klingspor_ag](https://www.instagram.com/klingspor_ag)



[/klingspor_ag](https://www.youtube.com/klingspor_ag)

